# davide groppi

TECHNICAL TRAINING

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES



WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES





WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES



WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES

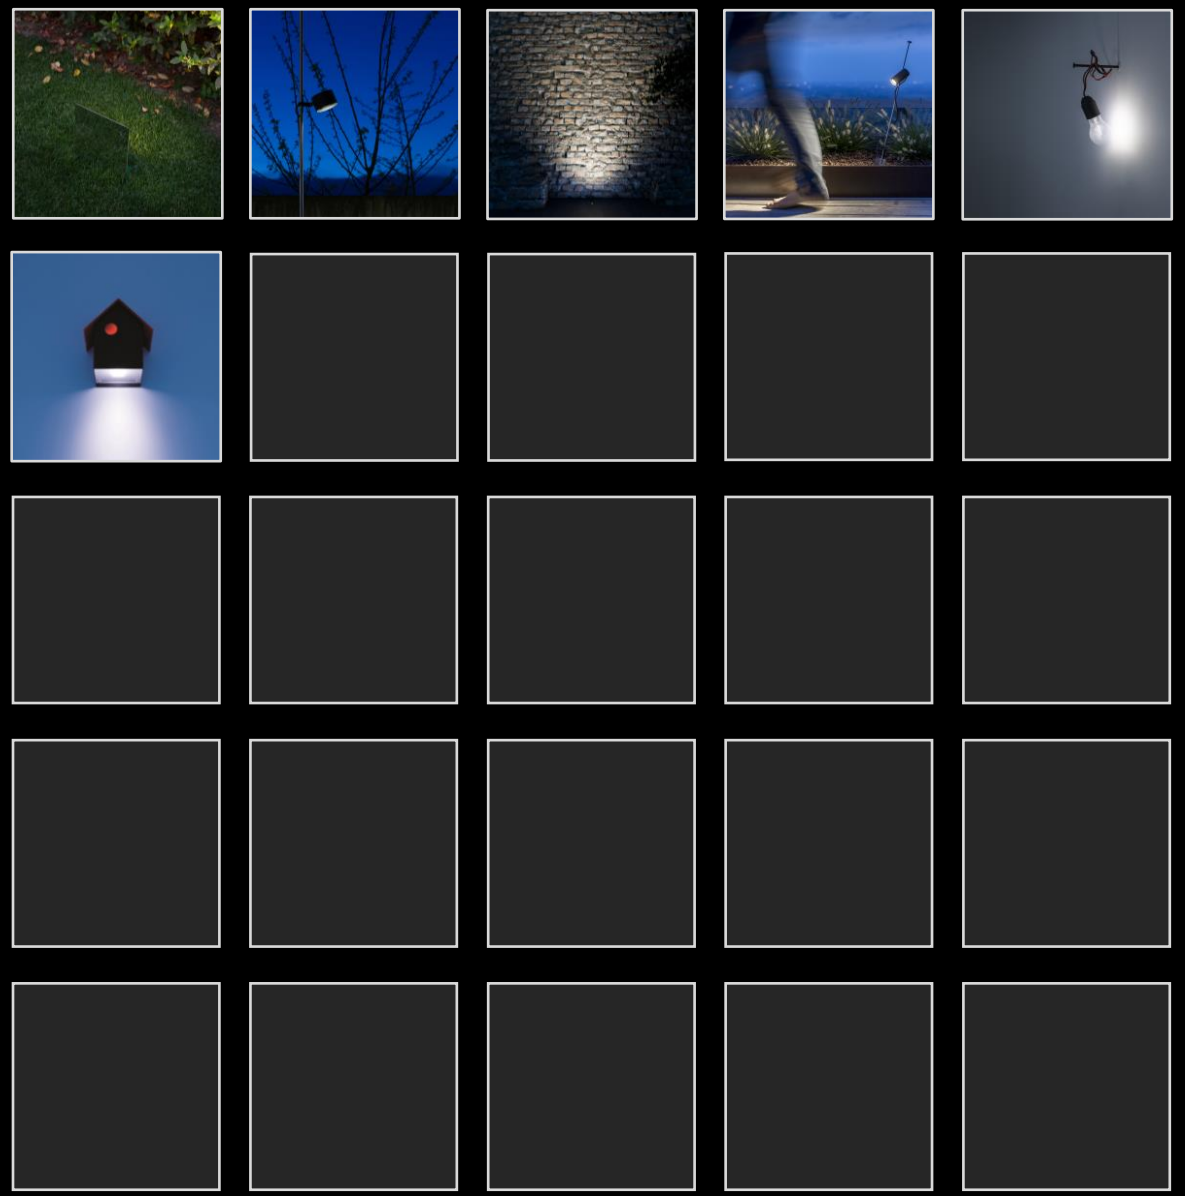

WIRELESS

TABLE

FLOOR

SUSPENSION

WALL

CEILING

RECESSED

SYSTEM

TRACKS - PROFILES

OUTDOOR

ACCESSORIES



# ENDLESS

Design Davide Groppi - 2018

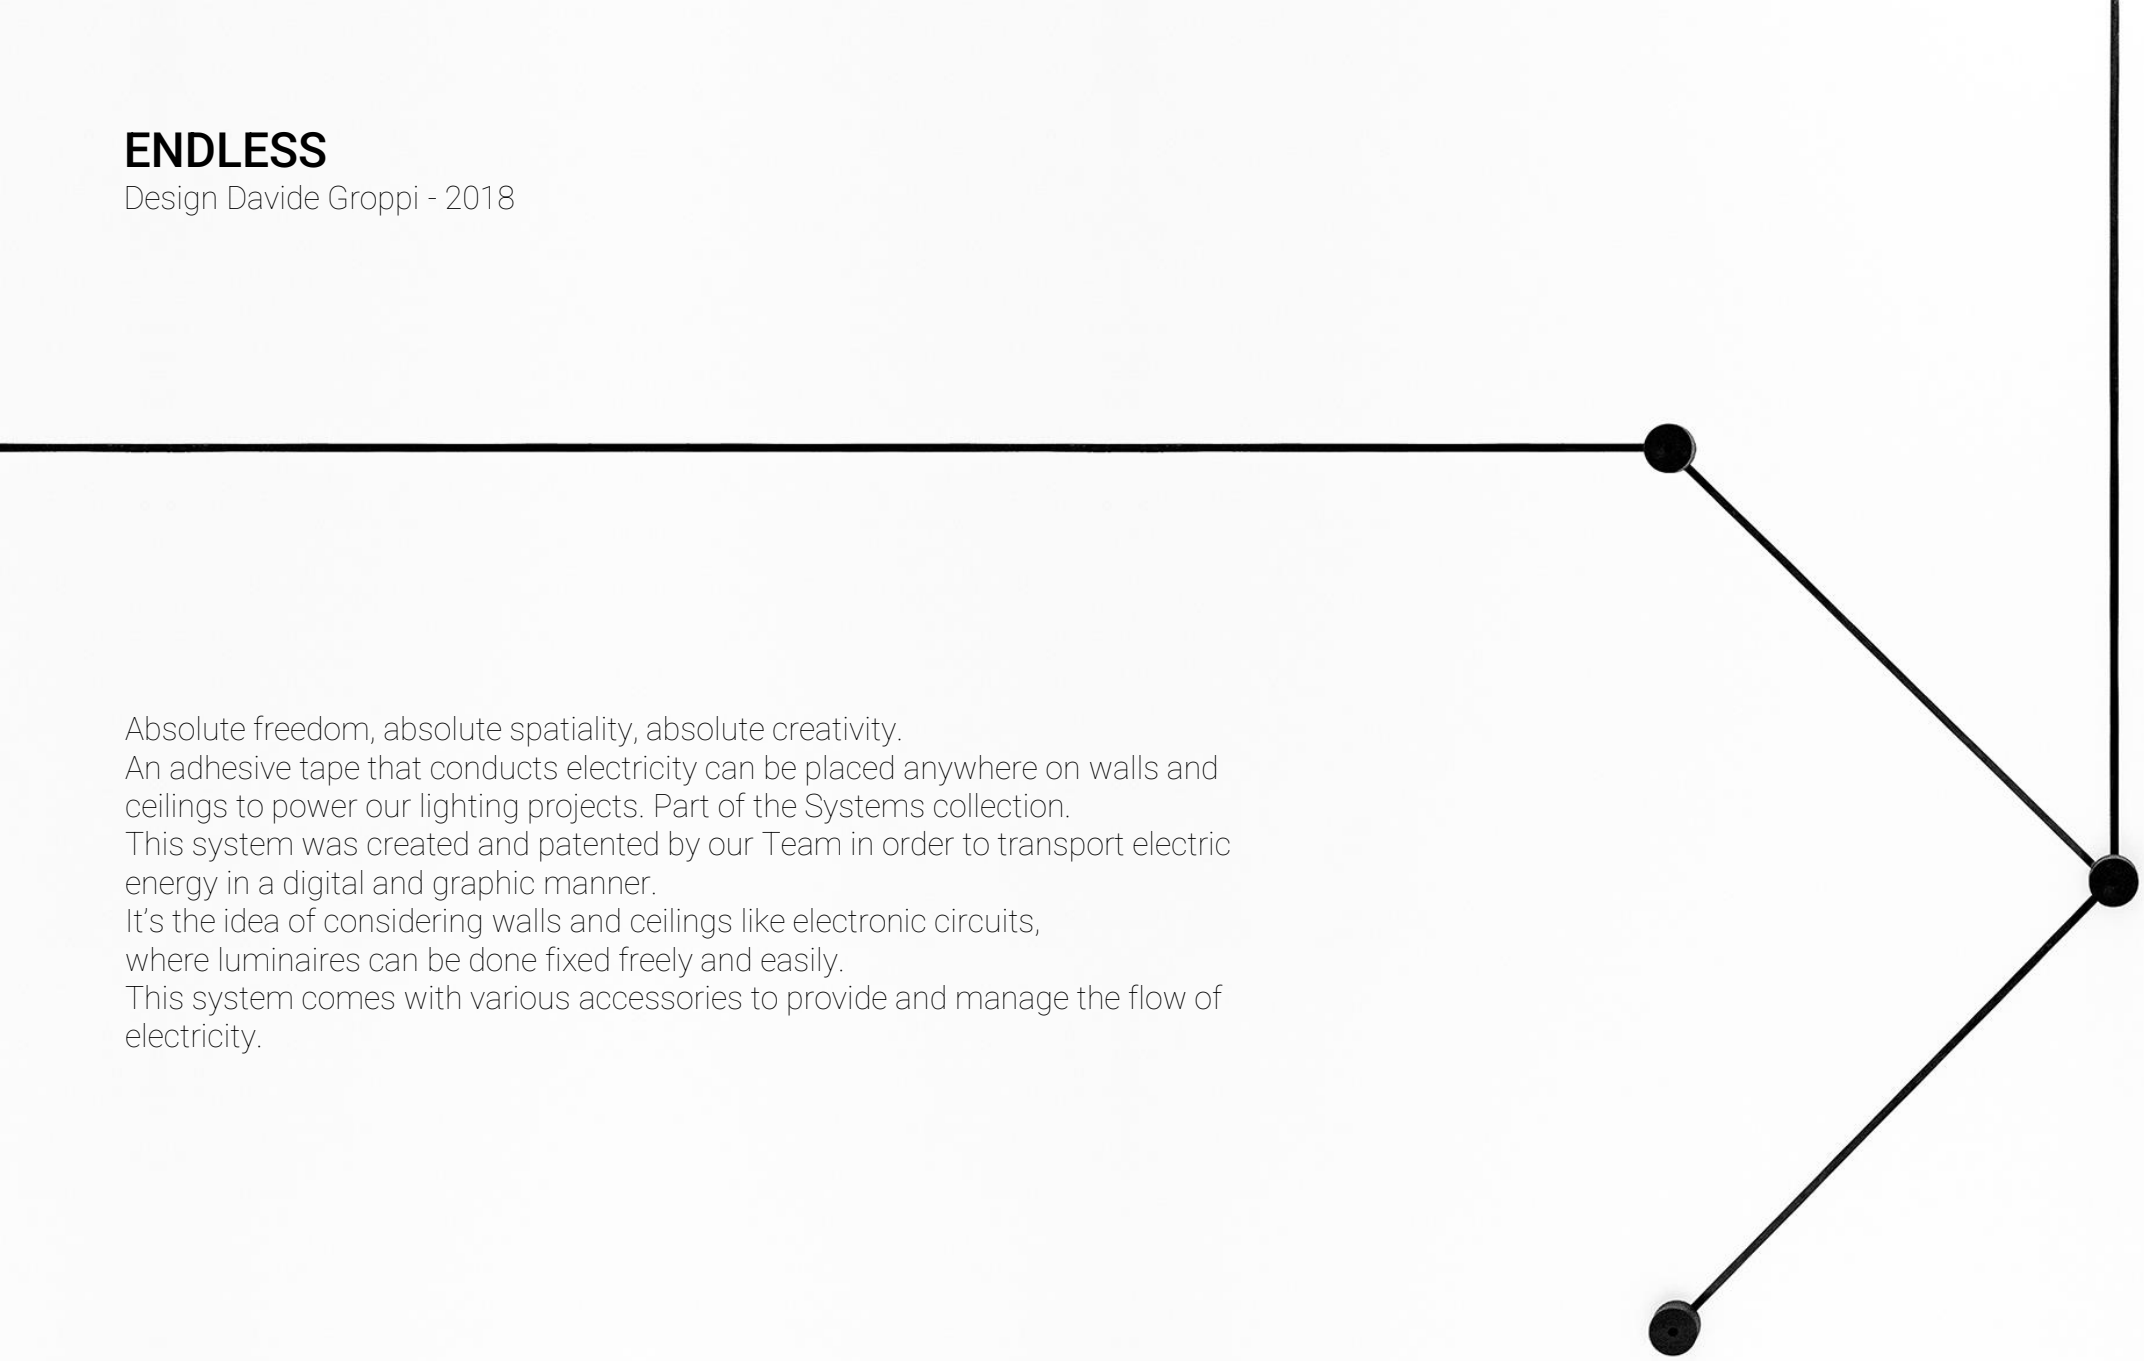

Absolute freedom, absolute spatiality, absolute creativity.
An adhesive tape that conducts electricity can be placed anywhere on walls and ceilings to power our lighting projects. Part of the Systems collection.
This system was created and patented by our Team in order to transport electric energy in a digital and graphic manner.
It’s the idea of considering walls and ceilings like electronic circuits, where luminaires can be done fixed freely and easily.
This system comes with various accessories to provide and manage the flow of electricity.

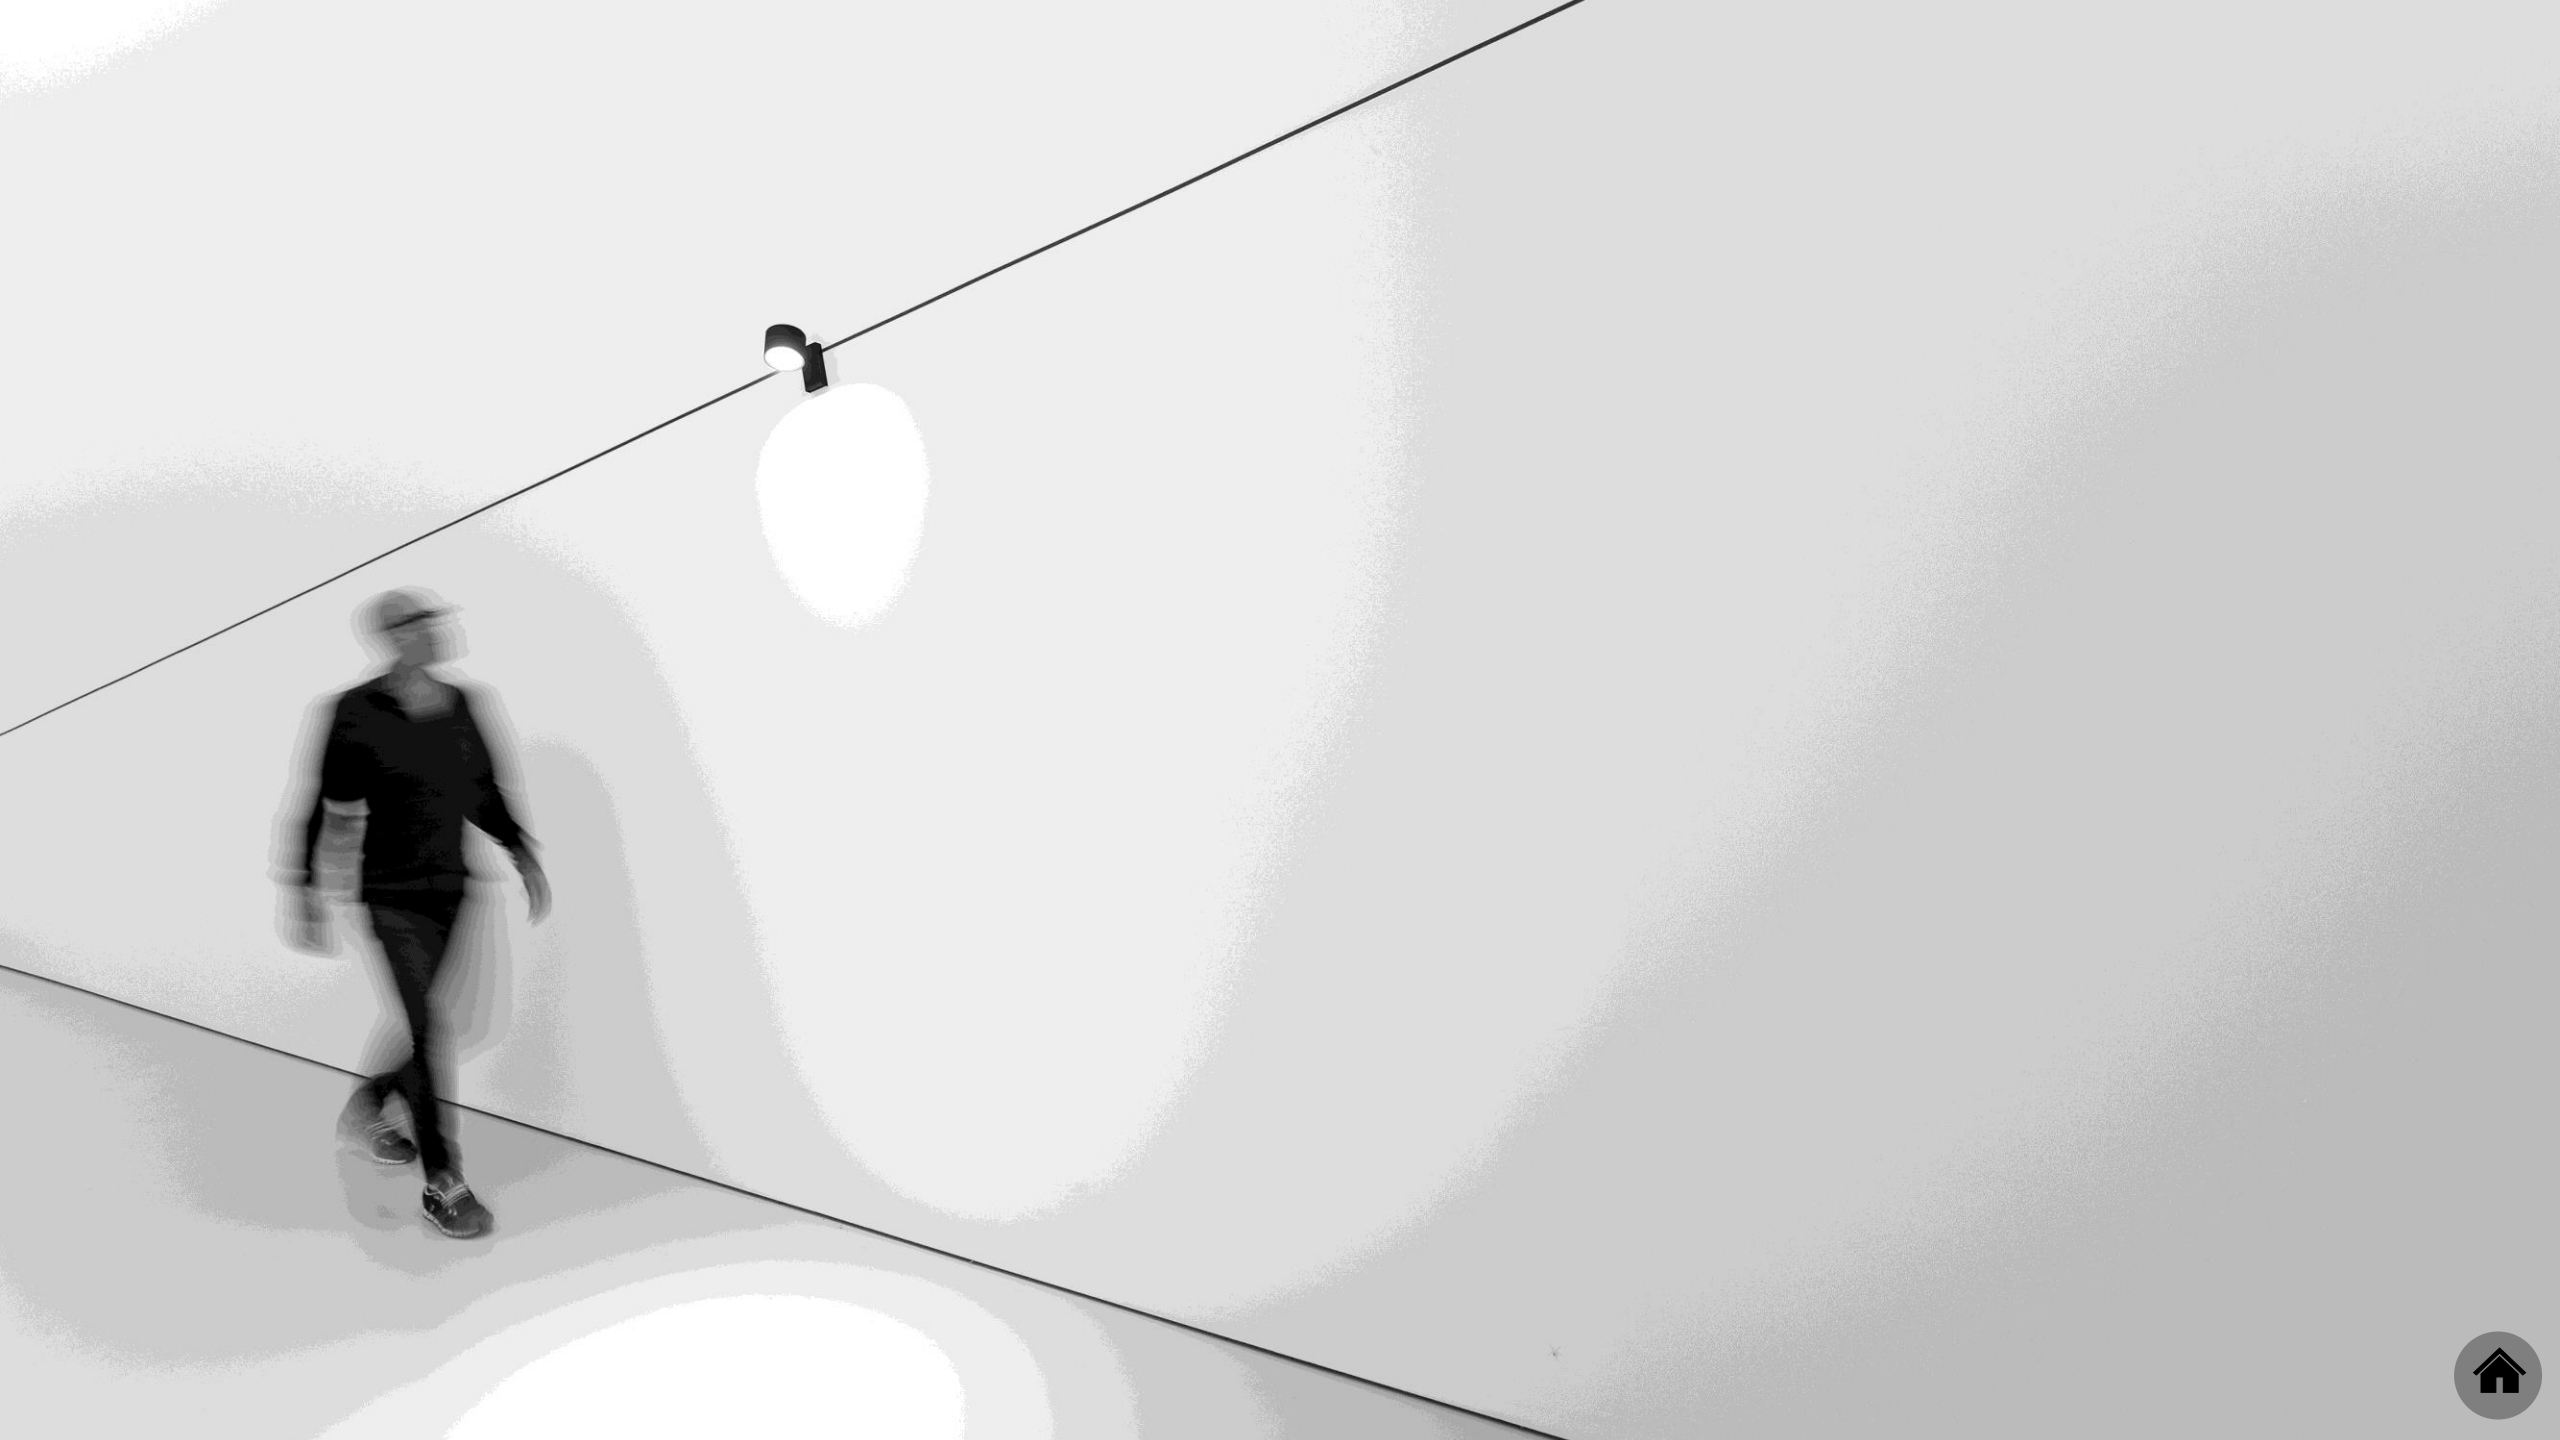

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

DOT P ENDLESS

MISS ENDLESS



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

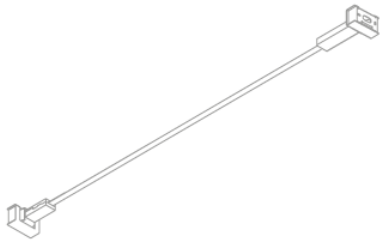

INFINITO 6 / INFINITO 12

COLIBRÌ

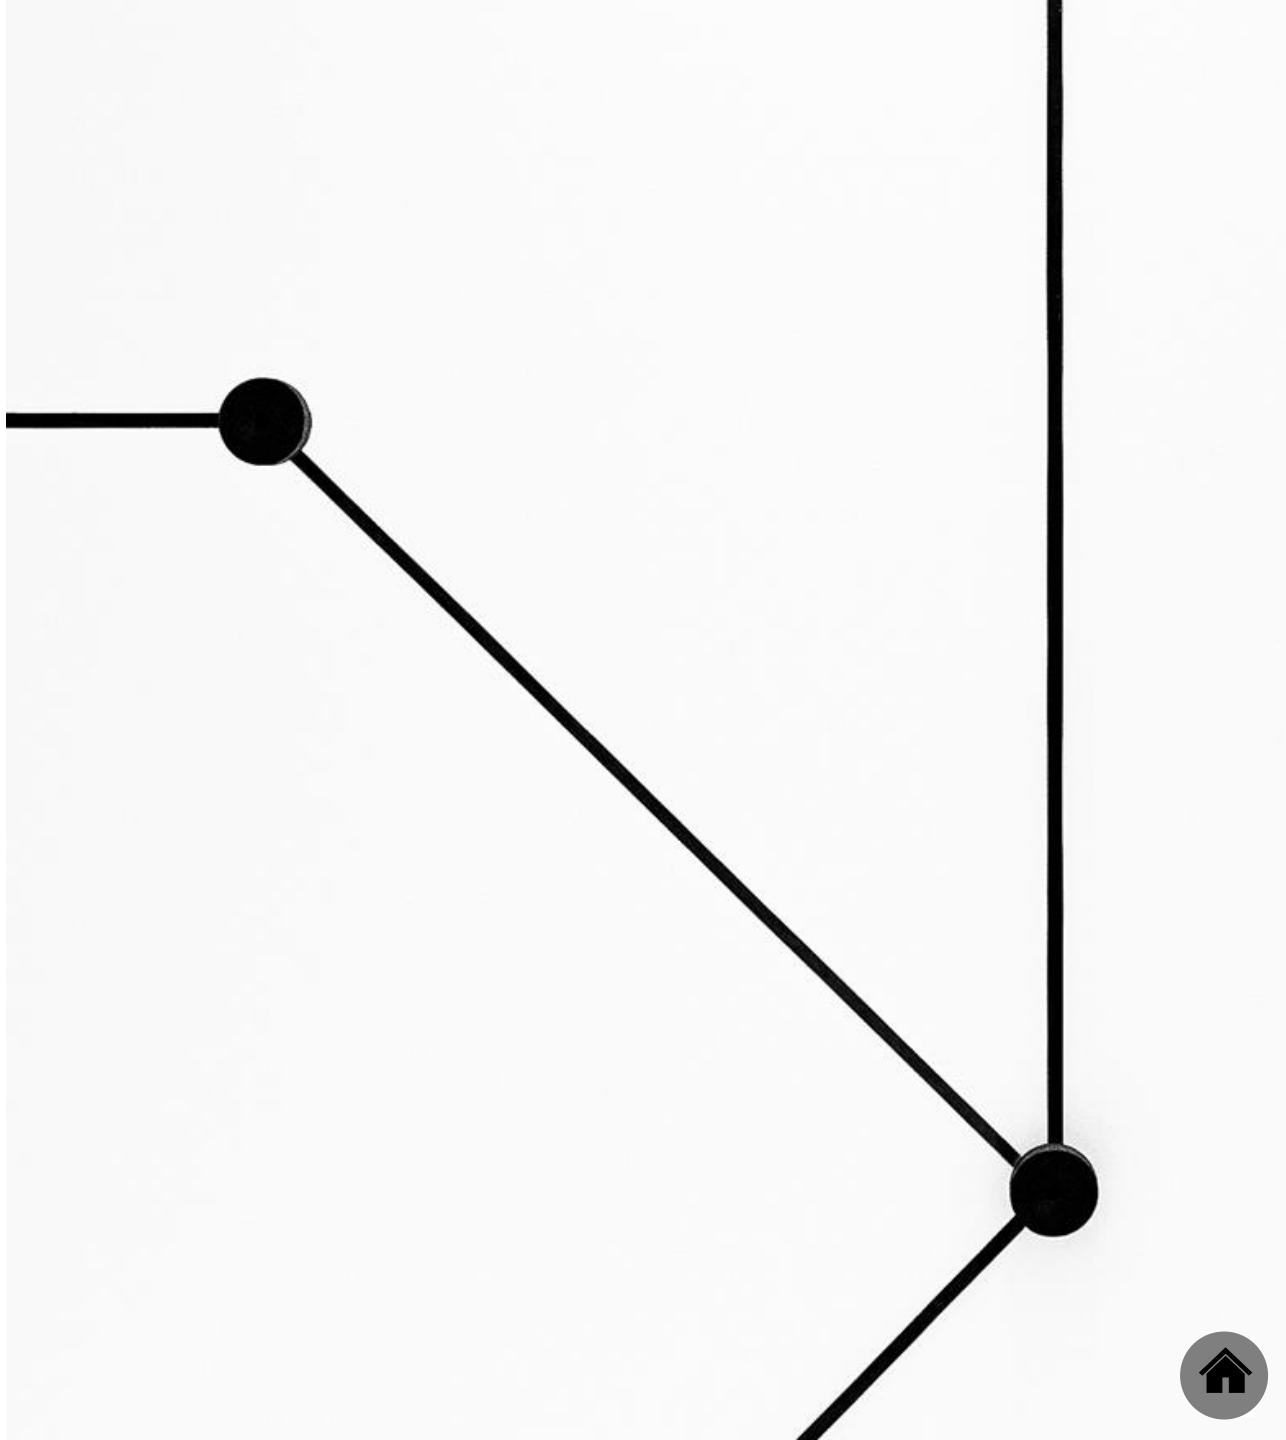

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

DOT P ENDLESS

MISS ENDLESS



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

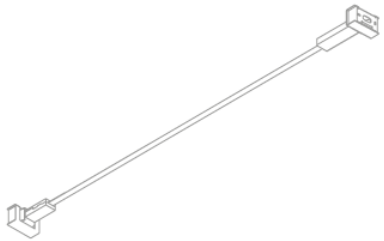

INFINITO 6 / INFINITO 12

COLIBRÌ

# MIRA ENDLESS

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

DOT P ENDLESS

MISS ENDLESS



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

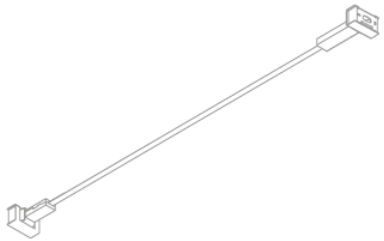

INFINITO 6 / INFINITO 12

COLIBRÌ

# DOT P ENDLESS

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

FLASH 6 / FLASH 12

DOT P ENDLESS

MISS ENDLESS

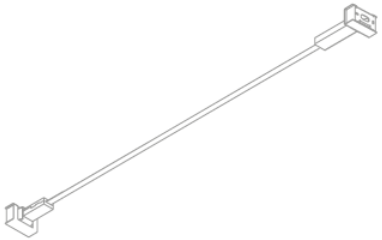

INFINITO 6 / INFINITO 12



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

COLIBRÌ

# SPOT ENDLESS

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

FLASH 6 / FLASH 12

DOT P ENDLESS

MISS ENDLESS

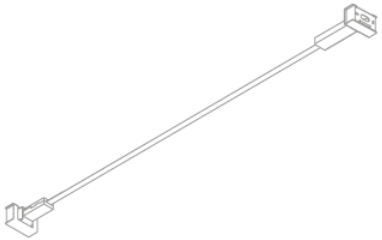

INFINITO 6 / INFINITO 12



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

COLIBRÌ

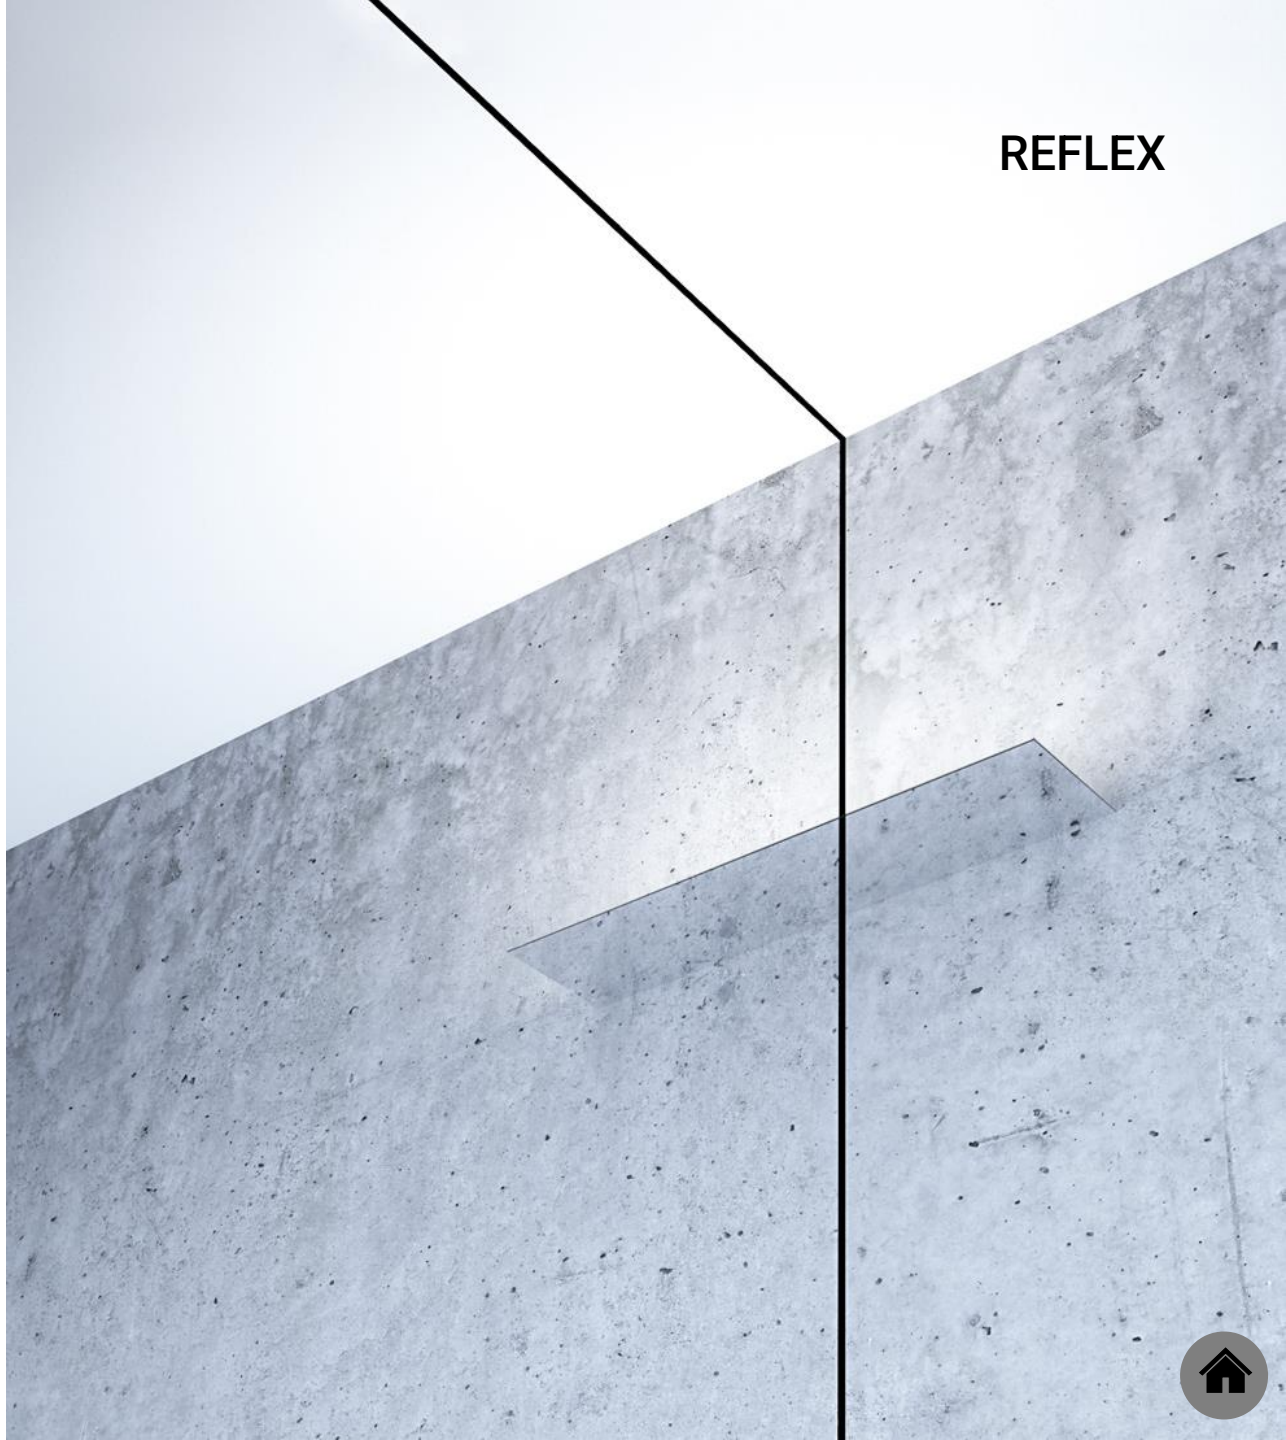

REFLEX

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS



DOT P ENDLESS

MISS ENDLESS



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

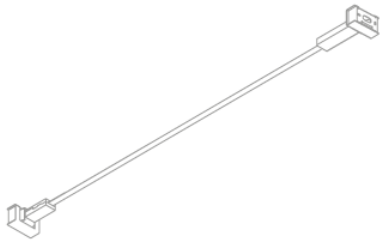

INFINITO 6 / INFINITO 12

COLIBRÌ

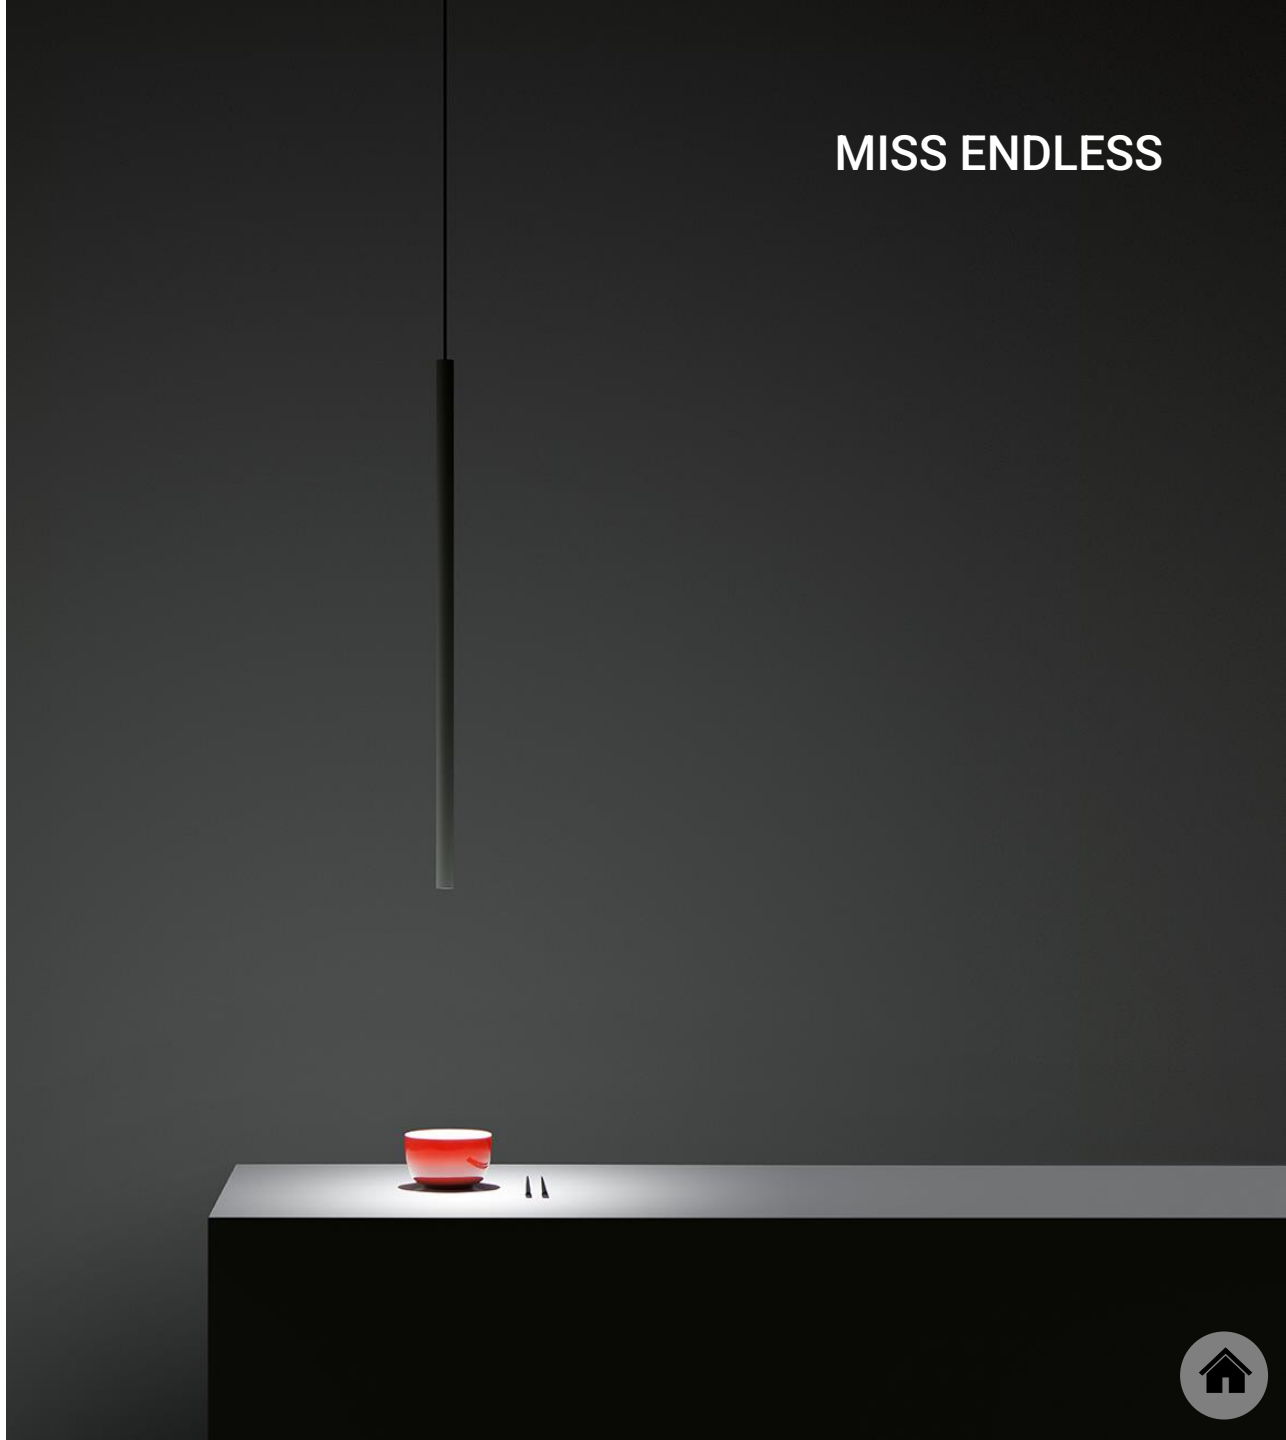

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

DOT P ENDLESS

MISS ENDLESS



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

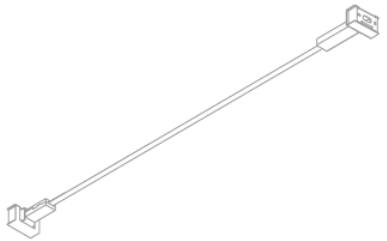

INFINITO 6 / INFINITO 12

COLIBRÌ

## CATHODE ENDLESS

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

DOT P ENDLESS

MISS ENDLESS



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

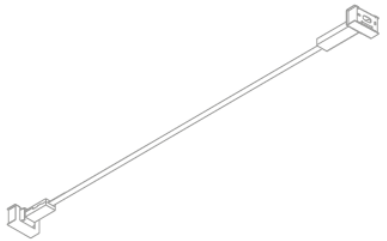

INFINITO 6 / INFINITO 12

COLIBRÌ

# INFINITO ENDLESS

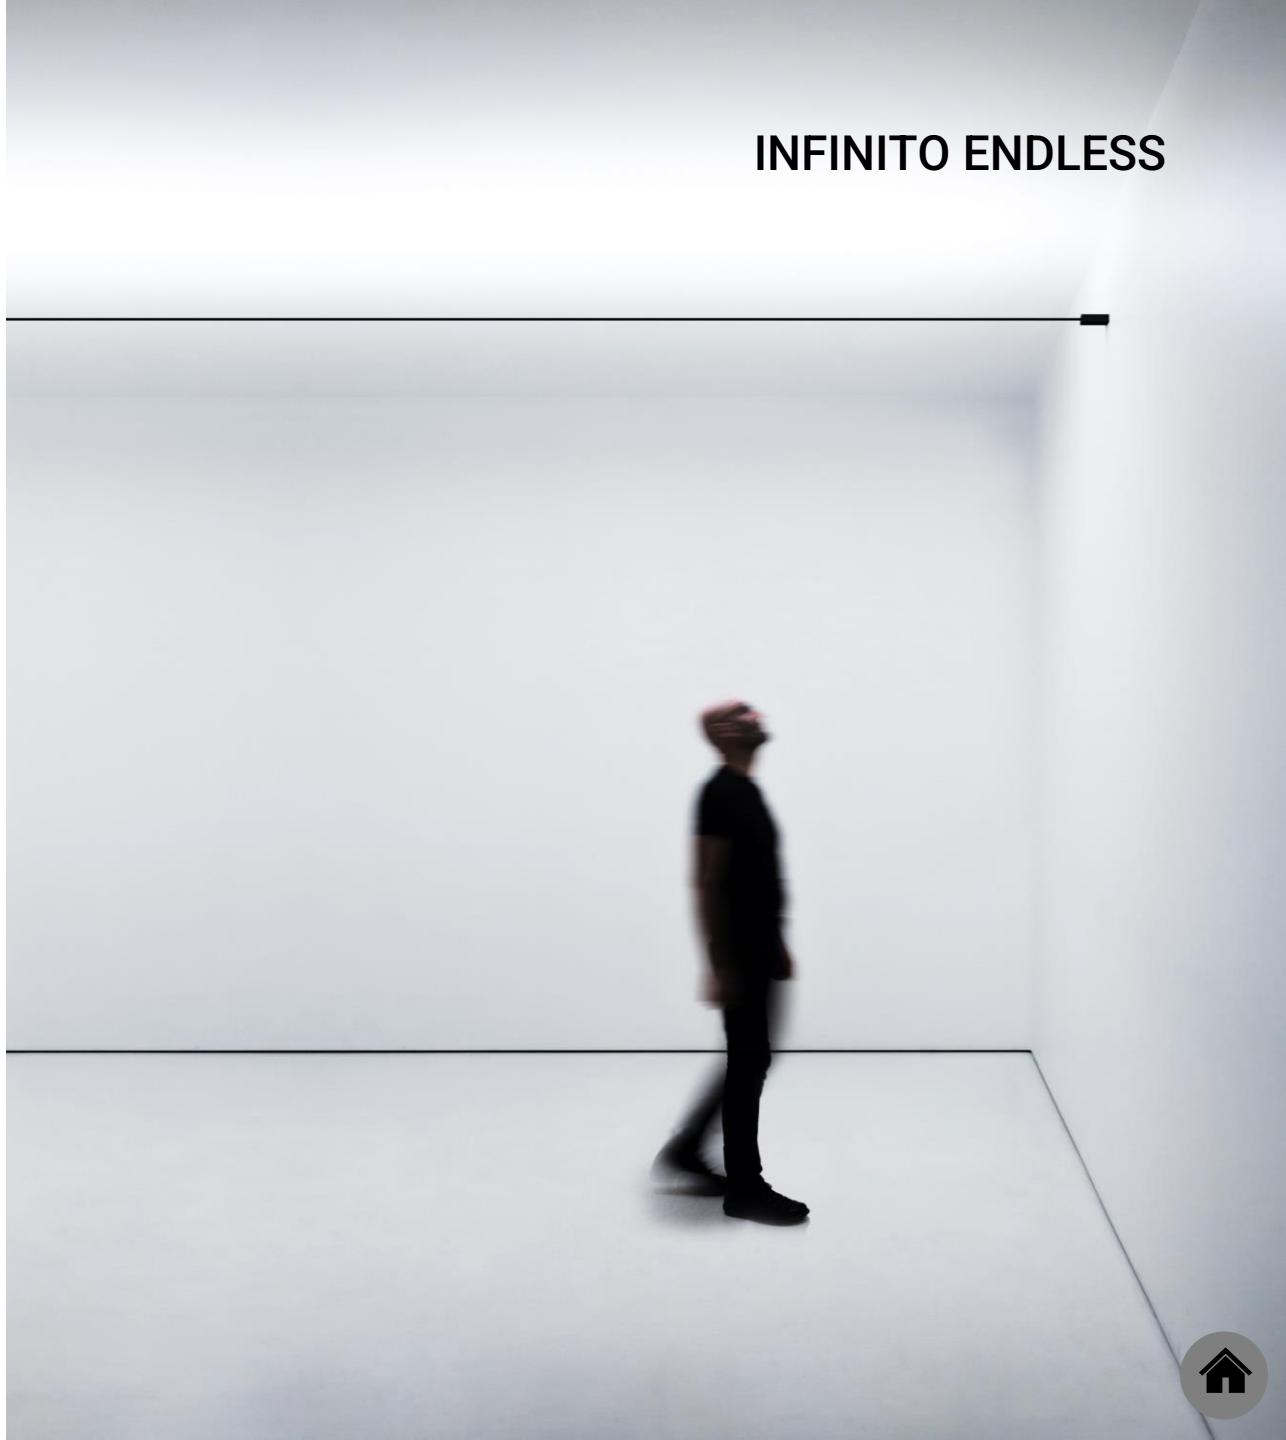

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

DOT P ENDLESS

MISS ENDLESS



SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

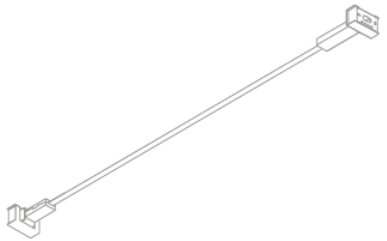

INFINITO 6 / INFINITO 12

COLIBRÌ

# FLASH ENDLESS

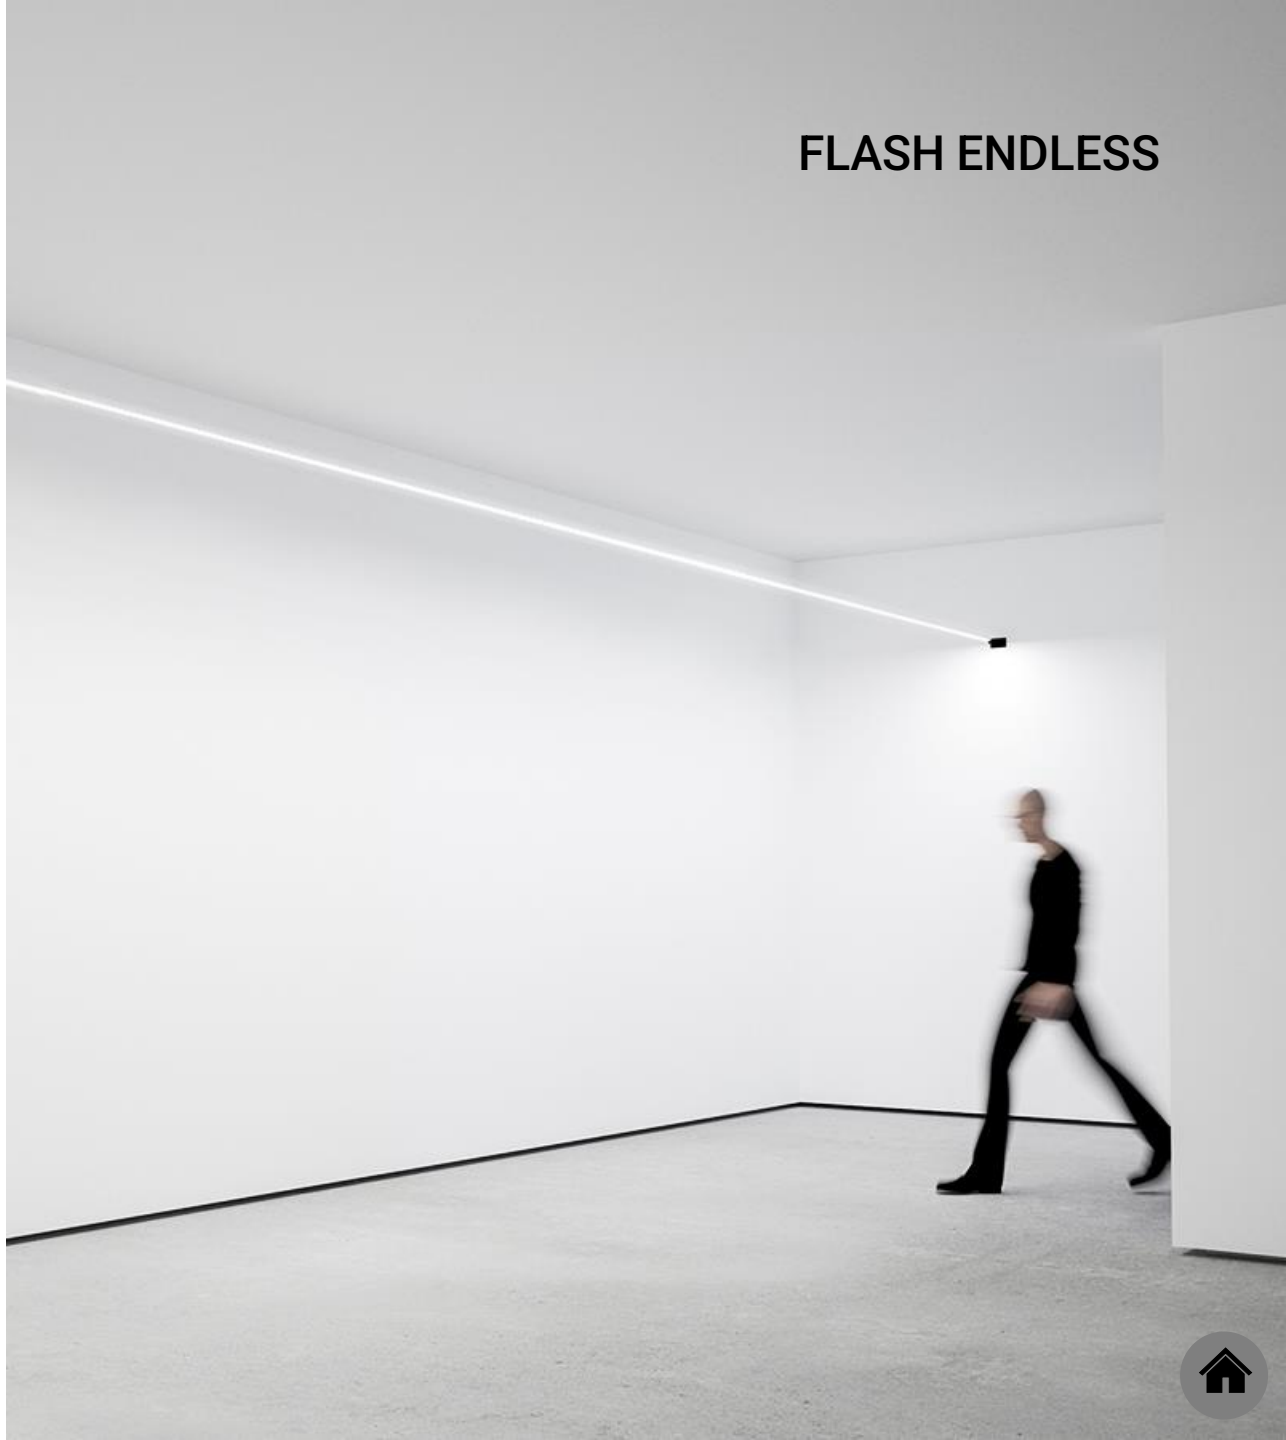

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS

DOT P ENDLESS



SPOT ENDLESS

REFLEX

MISS ENDLESS

CATHODE ENDLESS

FLASH 6 / FLASH 12

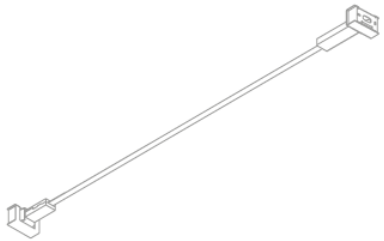

INFINITO 6 / INFINITO 12

COLIBRÌ

# COLIBRÌ ENDLESS

# ENDLESS – LIGHT SOLUTIONS



MIRA ENDLESS
CASAMBI

DOT P ENDLESS
CASAMBI



SPOT ENDLESS
CASAMBI

REFLEX

MISS ENDLESS

CATHODE ENDLESS

FLASH 6 / FLASH 12

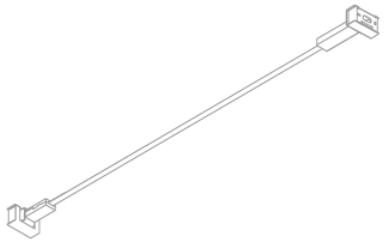

INFINITO 6 / INFINITO 12

COLIBRÌ

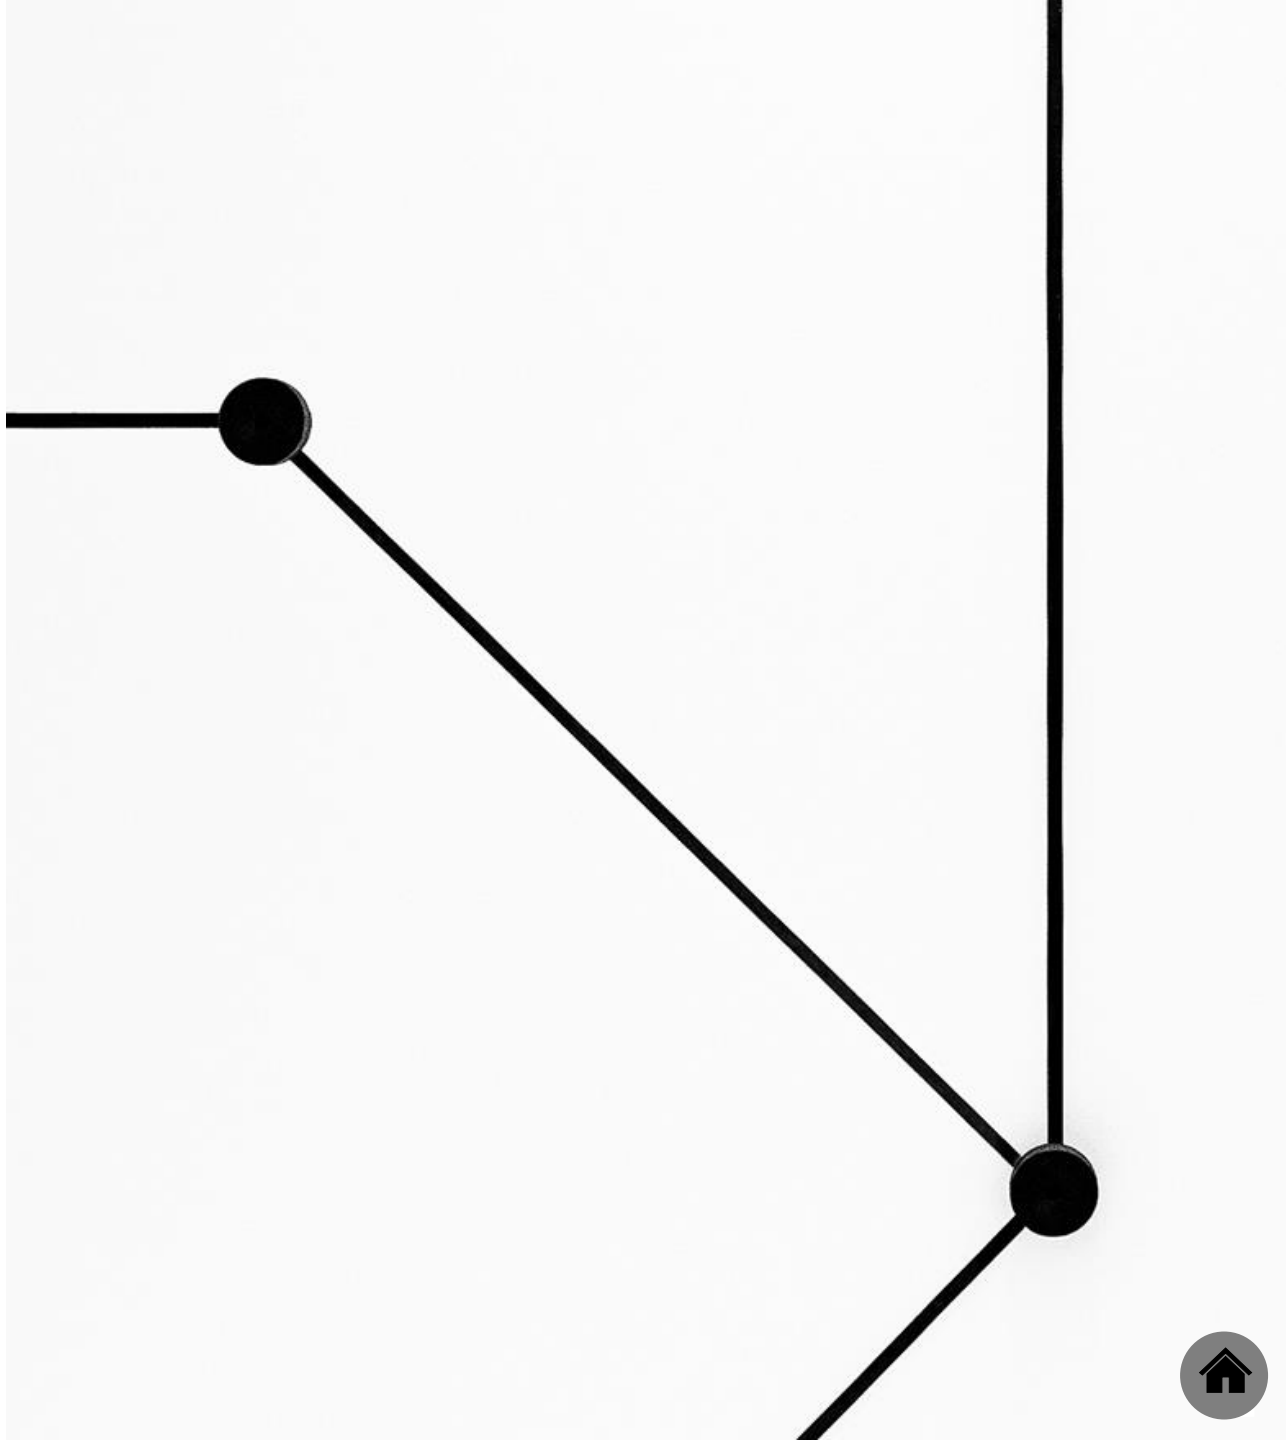

# ENDLESS COMPONENTS

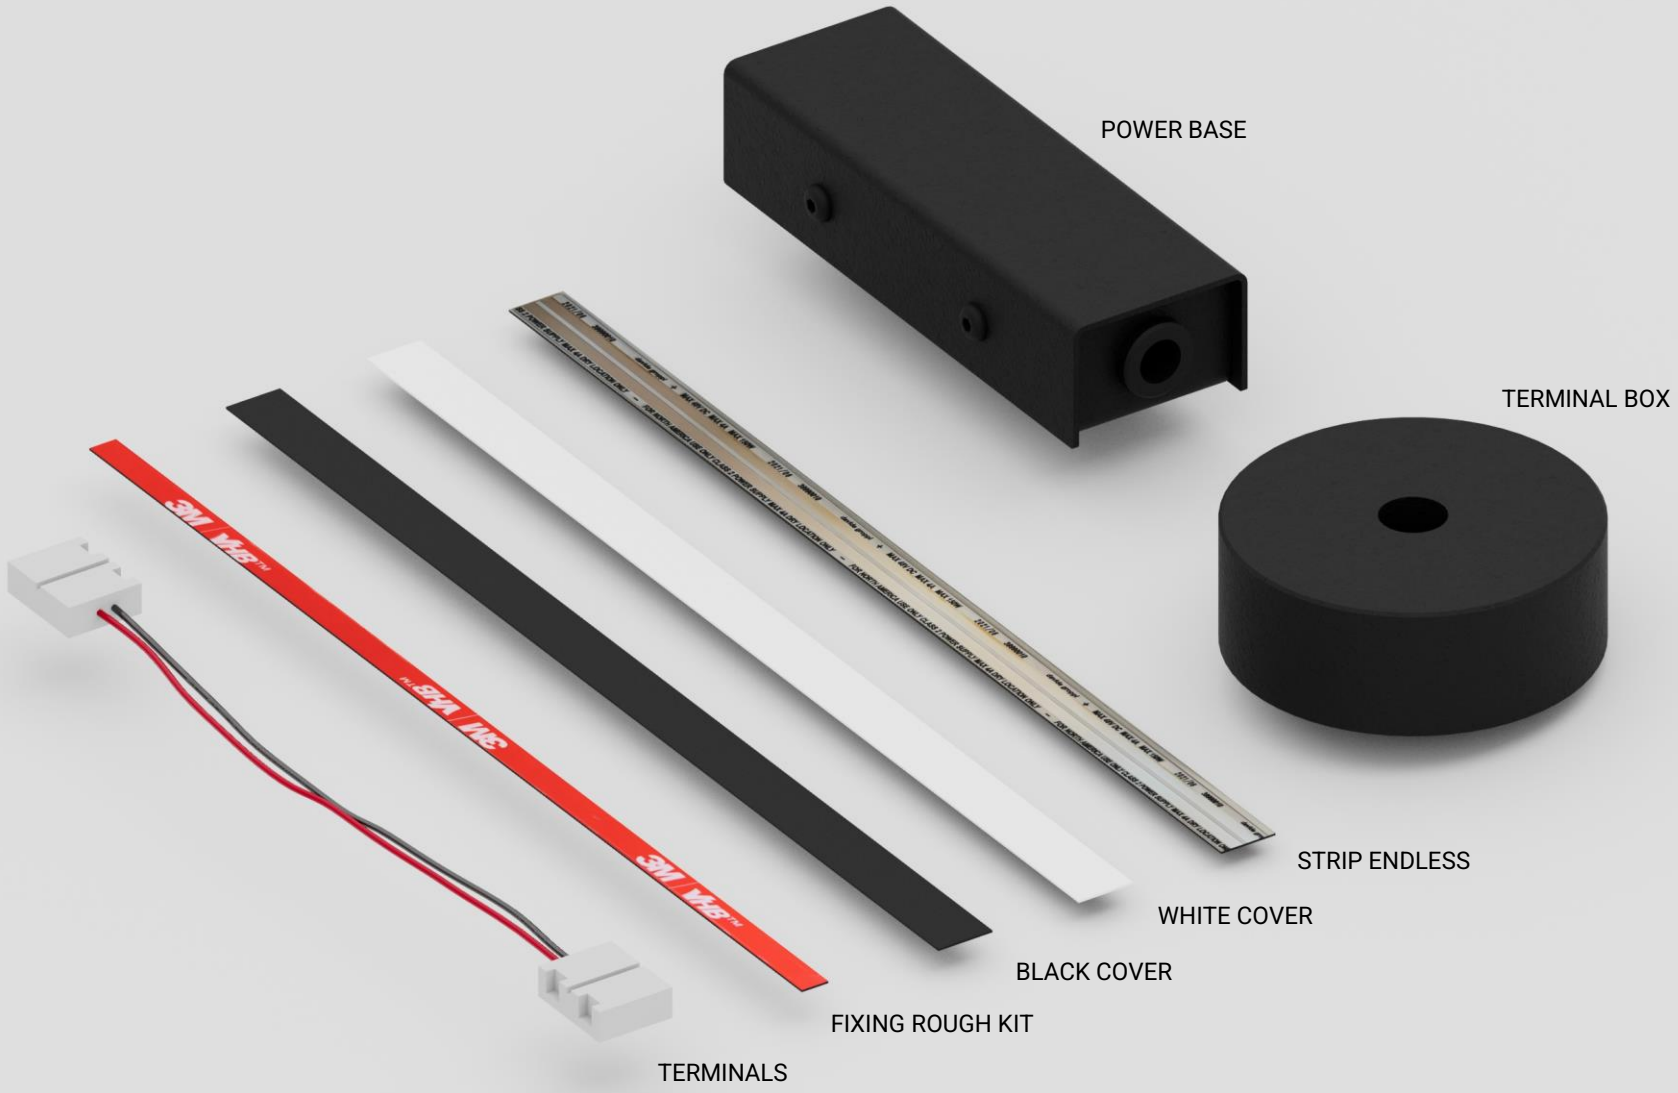

# REMOTE POWER SUPPLY KIT

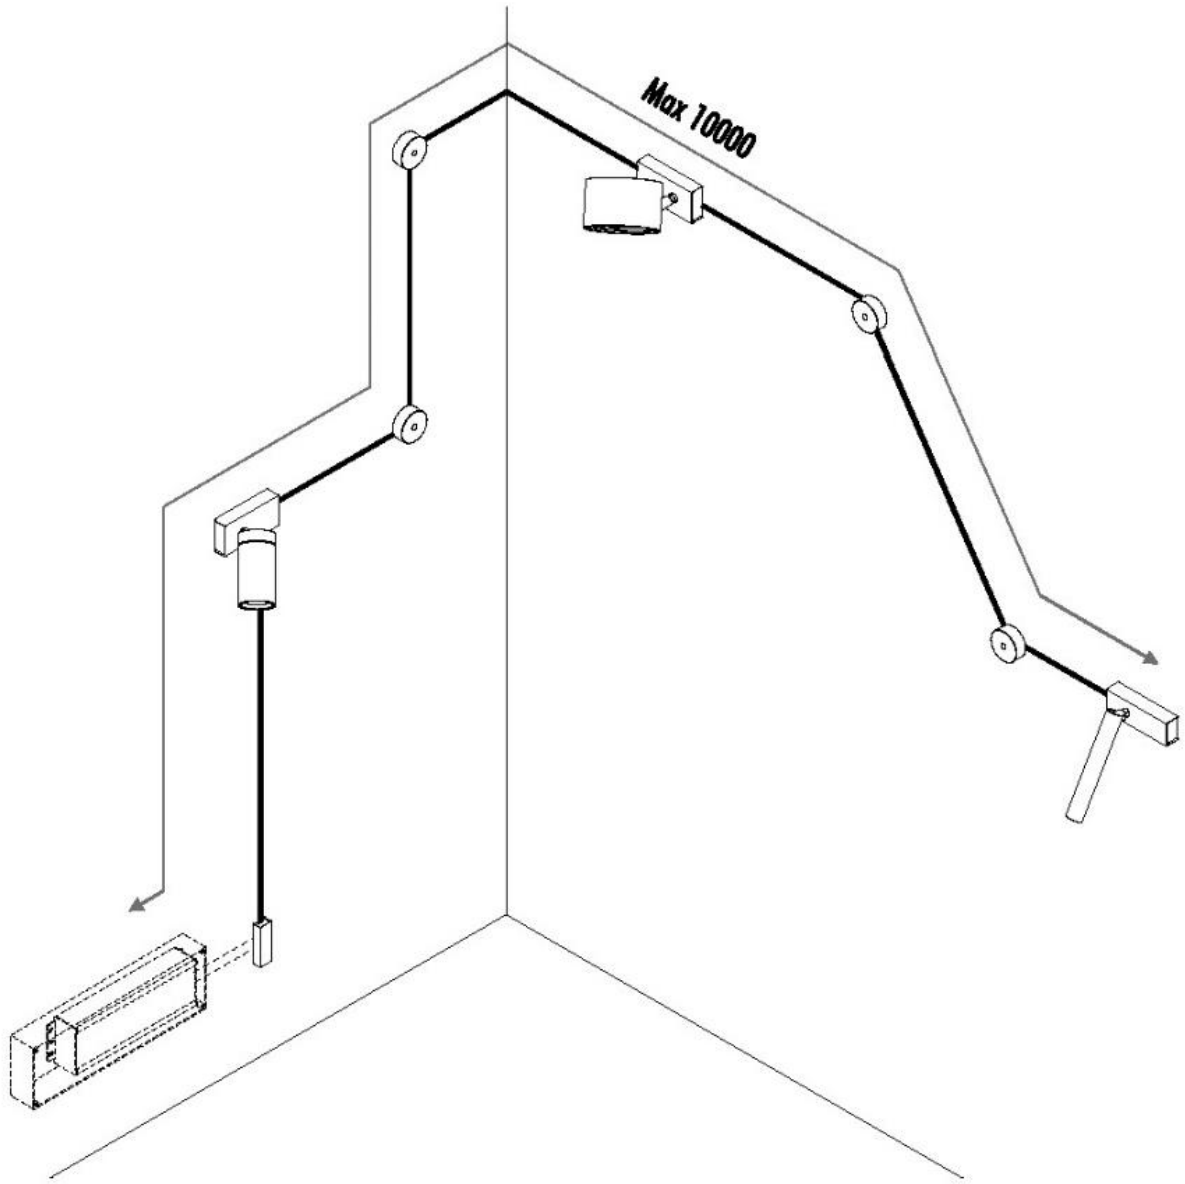

# REMOTE POWER SUPPLY KIT

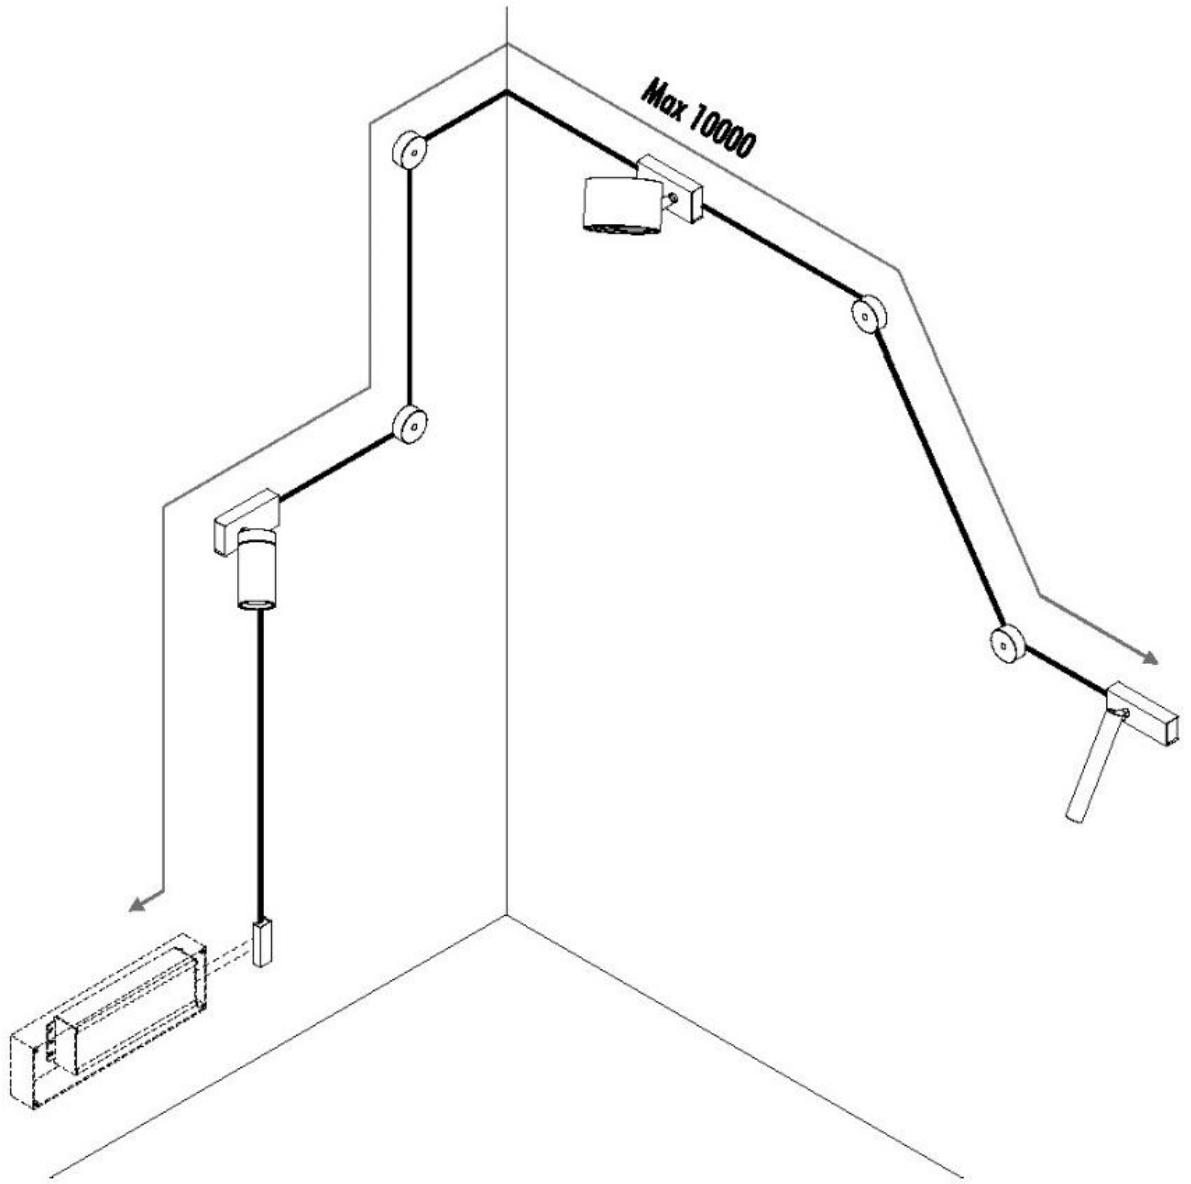

# WALL AND CEILING ROSE KIT

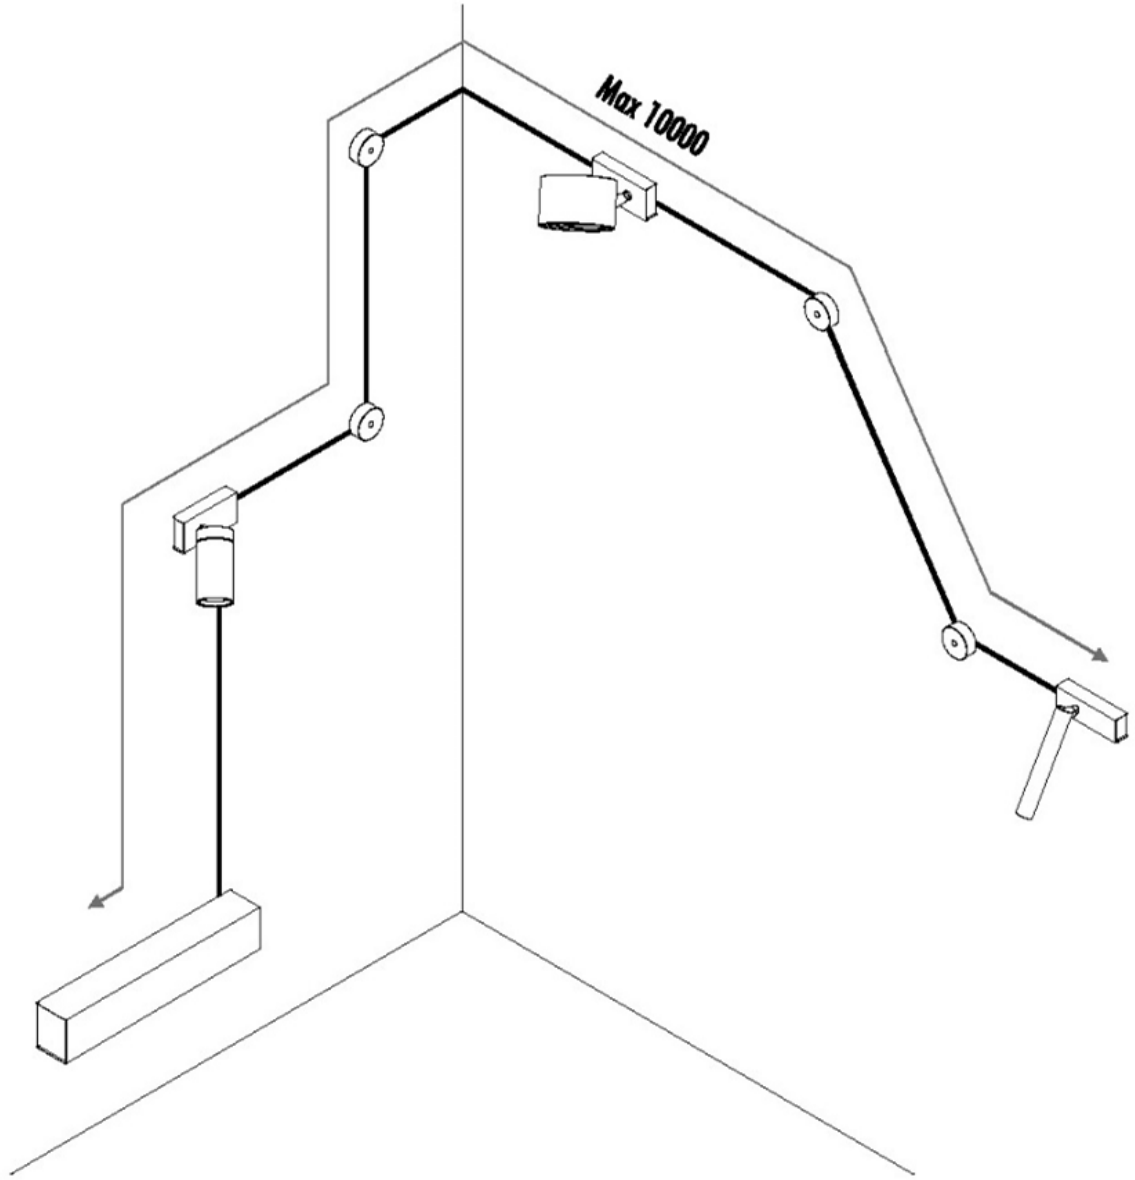

# POWER SUPPLY KIT WITH PLUG

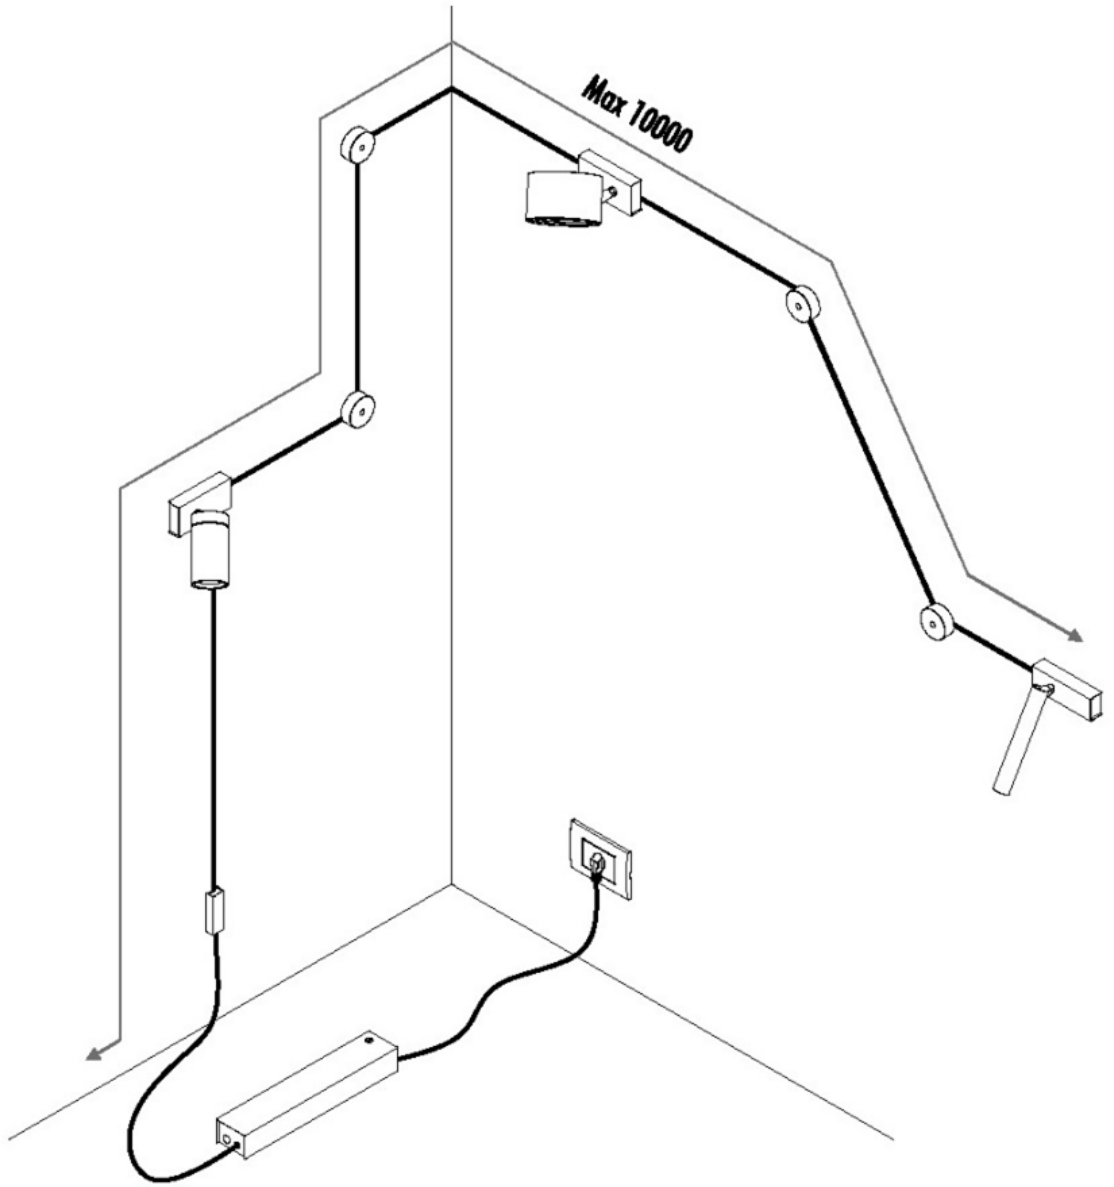

# POWER SUPPLY KIT

## ON/OFF

**ENDLESS ON/OFF**
**(Max 48V DC -**
**Max 150W - Max 4A)**



**REMOTE DRIVER**
1Z1120640

**OR**



**WALL / CEILING / REMOTE DRIVER**
1A2450300.00.00
1A2450400.00.00
1A1020300.00.00
1A1020400.00.00

**OR**



**DRIVER WITH PLUG**
1A1330300.00.00
1A1330400.00.00
1A0260300.00.00
1A0260400.00.00

\+

**POWER BASE**
1A0030300.00.00
1A0030400.00.00

\+



**ENDLESS**
1A3470300.00.00
1A3470400.00.00
1A0050300.00.00
1A0050400.00.00

\+

**TERMINAL BOX**
1A3480300.00.00
1A3480400.00.00

\+

**MIRA ENDLESS**

**DOT P ENDLESS**

**MISS ENDLESS**

**SPOT ENDLESS**

**REFLEX**

**CATHODE ENDLESS**

**FLASH 6 / FLASH 12**

**INFINITO 6 / INFINITO 12**

**COLIBRÌ**

# POWER SUPPLY KIT
## DIMMABLE

**ENDLESS dimmable (Max 48V DC - Max 150W - Max 4A)**

REMOTE DRIVER
1Z1120250

+



CONTROLLER
1Z2170010

OR

WALL / CEILING DRIVER
1A4090300.00.07
1A4090400.00.07
1A1810300.00.07
1A1810400.00.07

OR

DRIVER WITH PLUG
1A1340300.00.06
1A1340400.00.06
1A1800300.00.06
1A1800400.00.06

+

POWER BASE
1A0030300.00.00
1A0030400.00.00

+



ENDLESS
1A3470300.00.00
1A3470400.00.00
1A0050300.00.00
1A0050400.00.00

+

TERMINAL BOX
1A3480300.00.00
1A3480400.00.00

+

MIRA ENDLESS

DOT P ENDLESS



MISS ENDLESS

SPOT ENDLESS

REFLEX

CATHODE ENDLESS

FLASH 6 / FLASH 12

INFINITO 6 / INFINITO 12

COLIBRÌ

# POWER SUPPLY KIT

## CASAMBI DIMMABLE CONTROL

**ENDLESS CASAMBI**
**(Max 48V DC -**
**Max 150W - Max 4A)**

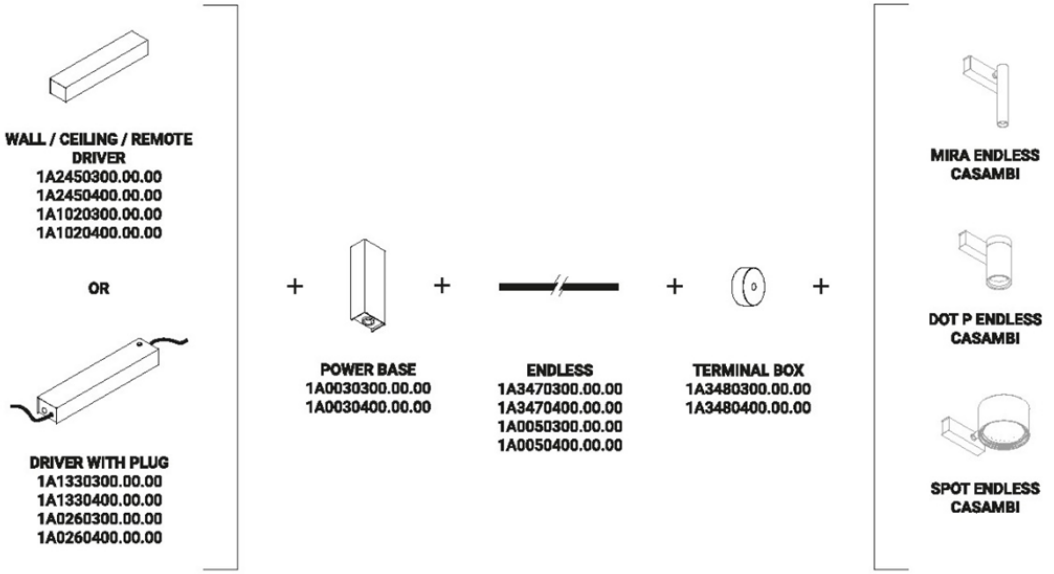

ENDLESS Layout

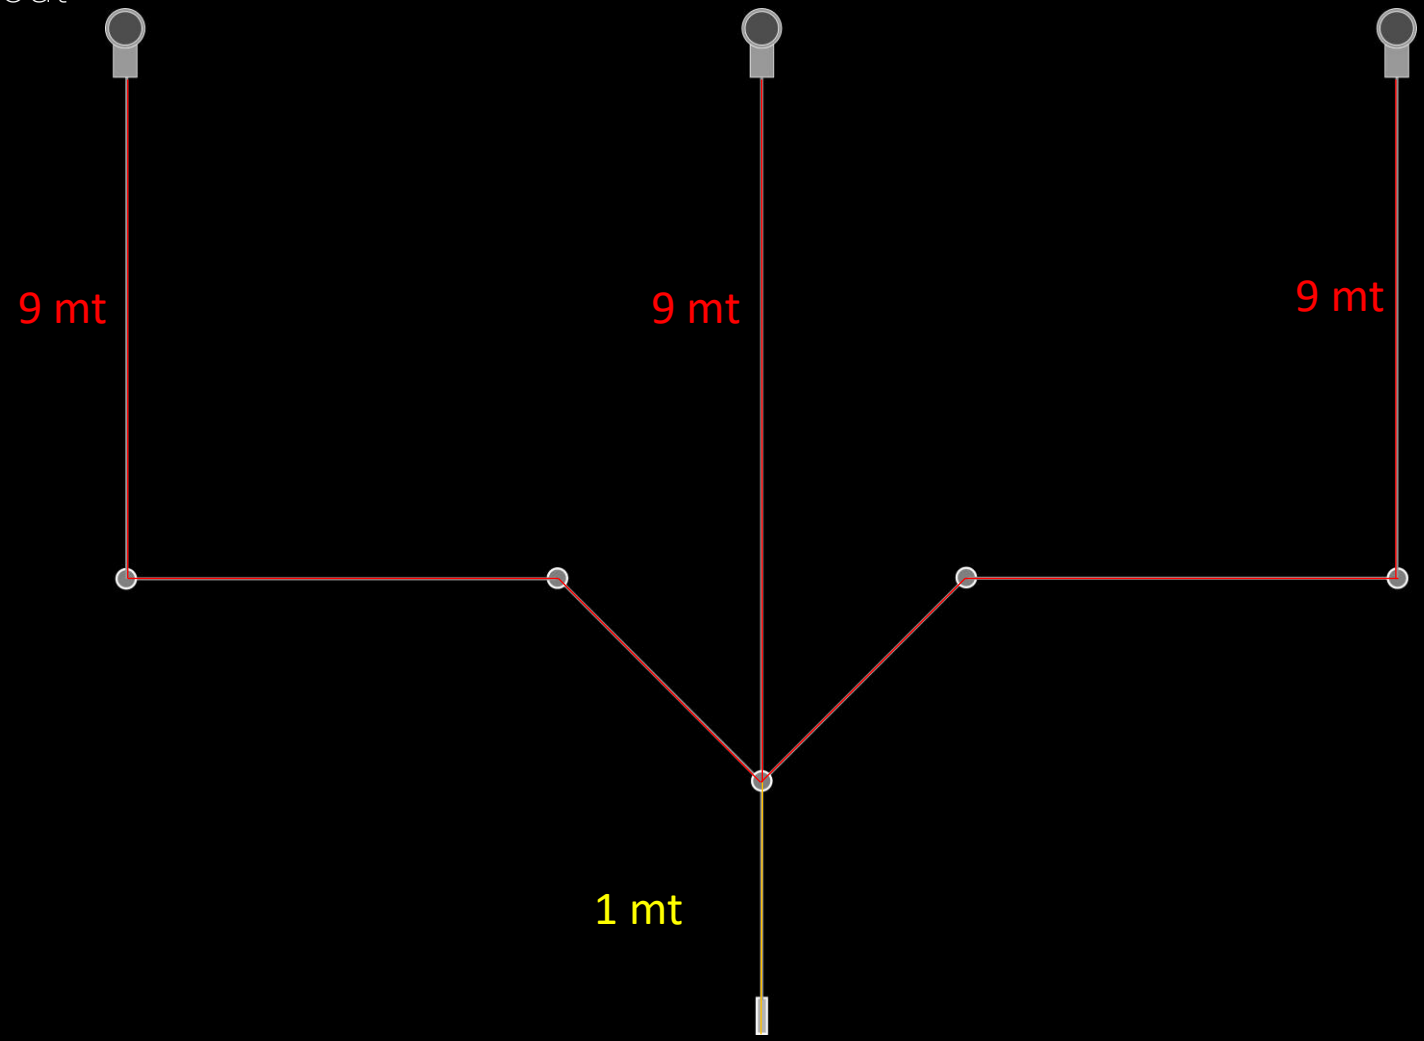


MAX 10 MT

| Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125 A | | Wattage | Ampere (A) |
|---|---|---|---|
| **Power Kit:** | | | |
| 1A133XX00.00.00 | Power supply kit with plug - 48V - Not dimmable | 60 | Max 1,25 |
| 1A245XX00.00.00 | Wall ceiling rose kit - Remote - 48V - Not dimmable | 60 | Max 1,25 |
| 1A134XX00.00.06 | Power supply kit with plug - 48v - Dimmable | 60 | Max 1,25 |
| 1A409XX00.00.07 | Wall ceiling rose kit - 48V - DALI - PUSH - 1-10 V Dimmable | 60 | Max 1,25 |
| 1Z1120640 | Remote driver - 48V - Not dimmable | 60 | Max 1,25 |
| 1A026XX00.00.00 | Power supply kit with plug - 48V - Not dimmable | 150 | Max 3,125 |
| 1A102XX00.00.00 | Wall ceiling rose kit - Remote - 48V - Not dimmable | 150 | Max 3,125 |
| 1A180XX00.00.06 | Power supply kit with plug - 48V - Dimmable | 150 | Max 3,125 |
| 1A181XX00.00.07 | Wall ceiling rose kit - 48V - DALI - PUSH - 1-10 V Dimmable | 150 | Max 3,125 |
| 1Z1120250 | Remote driver - 48V - 1-10 V Dimmable | 150 | Max 3,125 |
| **Elements:** | | | |
| 1A2980300.27.40 | CATHODE - Matt White - 2700K - ENDLESS | 5,5 | 0,14 |
| 1A2980300.30.40 | CATHODE - Matt White - 3000K - ENDLESS | 5,5 | 0,14 |
| 1A2980800.27.40 | CATHODE - Brushed Brass - 2700K - ENDLESS | 5,5 | 0,14 |
| 1A2980800.30.40 | CATHODE - Brushed Brass - 3000K - ENDLESS | 5,5 | 0,14 |
| 1A2340300.27.40 | DOT P - Matt White - 2700K - ENDLESS | 13 | 0,34 |
| 1A2340300.30.40 | DOT P - Matt White - 3000K - ENDLESS | 13 | 0,34 |
| 1A2340400.27.40 | DOT P - Matt Black - 2700K - ENDLESS | 13 | 0,34 |
| 1A2340400.30.40 | DOT P - Matt Black - 3000K - ENDLESS | 13 | 0,34 |
| 1A2340300.27.41 | DOT P - Matt White - 2700K - ENDLESS - CASAMBI | 15,5 | 0,4 |
| 1A2340300.30.41 | DOT P - Matt White - 3000K - ENDLESS - CASAMBI | 15,5 | 0,4 |
| 1A2340400.27.41 | DOT P - Matt Black - 2700K - ENDLESS - CASAMBI | 15,5 | 0,4 |
| 1A2340400.30.41 | DOT P - Matt Black - 3000K - ENDLESS - CASAMBI | 15,5 | 0,4 |
| 1A2280300.27.40 | MIRA - Matt White - 2700K - ENDLESS | 6 | 0,16 |
| 1A2280300.30.40 | MIRA - Matt White - 3000K - ENDLESS | 6 | 0,16 |
| 1A2280400.27.40 | MIRA - Matt Black - 2700K - ENDLESS | 6 | 0,16 |
| 1A2280400.30.40 | MIRA - Matt Black - 3000K - ENDLESS | 6 | 0,16 |
| 1A2280300.27.41 | MIRA - Matt White - 2700K - ENDLESS - CASAMBI | 8,5 | 0,22 |
| 1A2280300.30.41 | MIRA - Matt White - 3000K - ENDLESS - CASAMBI | 8,5 | 0,22 |
| 1A2280400.27.41 | MIRA - Matt Black - 2700K - ENDLESS - CASAMBI | 8,5 | 0,22 |
| 1A2280400.30.41 | MIRA - Matt Black - 3000K - ENDLESS - CASAMBI | 8,5 | 0,22 |
| 1A2960300.27.40 | MISS - Matt White - 2700K - ENDLESS | 5,5 | 0,14 |
| 1A2960300.30.40 | MISS - Matt White - 3000K - ENDLESS | 5,5 | 0,14 |
| 1A2960400.27.40 | MISS - Matt Black - 2700K - ENDLESS | 5,5 | 0,14 |
| 1A2960400.30.40 | MISS - Matt Black - 3000K - ENDLESS | 5,5 | 0,14 |
| 1A2960800.27.40 | MISS - Brushed Brass - 2700K - ENDLESS | 5,5 | 0,14 |
| 1A2960800.30.40 | MISS - Brushed Brass - 3000K - ENDLESS | 5,5 | 0,14 |
| 1A2962600.27.40 | MISS - Matt Total Black - 2700K - ENDLESS | 5,5 | 0,14 |
| 1A2962600.30.40 | MISS - Matt Total Black - 3000K - ENDLESS | 5,5 | 0,14 |





| Integrated products with ENDLESS system / Prodotti compatibili con il sistema ENDLESS - Absorption Max 3,125 A | | Wattage | Ampere (A) |
|---|---|---|---|
| **Elements:** | | | |
| 1A0850400.27.20 | REFLEX - Matt Black - 2700K - ENDLESS | 23 | 0,57 |
| 1A0850400.30.20 | REFLEX - Matt Black - 3000K - ENDLESS | 23 | 0,57 |
| 1A1080300.00.40 | SPOT - Matt White - ENDLESS | 13 | 0,34 |
| 1A1080400.00.40 | SPOT - Matt Black - ENDLESS | 13 | 0,34 |
| 1A1080300.00.41 | SPOT - Matt White - ENDLESS - CASAMBI | 15,5 | 0,4 |
| 1A1080400.00.41 | SPOT - Matt Black - ENDLESS - CASAMBI | 15,5 | 0,4 |

**MAX**
**3,125 OR 1,25 AMPERE**

# ENDLESS TAPE
## MULTI - PURPOSE

**ENDLESS conductive tape used with voltage/current other than 48V DC**

RISPECTIVE DRIVER OF THE PRODUCT YOU CHOOSE

+

**POWER BASE**
1A0030300.00.00
1A0030400.00.00

+



**ENDLESS**
1A3470300.00.00
1A3470400.00.00
1A0050300.00.00
1A0050400.00.00

+

**TERMINAL BOX**
1A3480300.00.00
1A3480400.00.00

+



**OHM**

**UTOPIA 6 / UTOPIA 12**

**MAGIA**

+

**CEILING SUSPENSION KIT**
1X0010300.02.00
1X0010400.02.00



**REFLEX 2 S**

+

**CEILING SUSPENSION KIT**
1X0010300.04.00
1X0010400.04.00



**SHANGHAI 2**

+

**CEILING SUSPENSION KIT**
1X0010300.01.00
1X0010400.01.00

**SOTTILE 2 / SOTTILE 2 DE**

+

**CEILING SUSPENSION KIT**
1X0010300.01.00
1X0010400.01.00

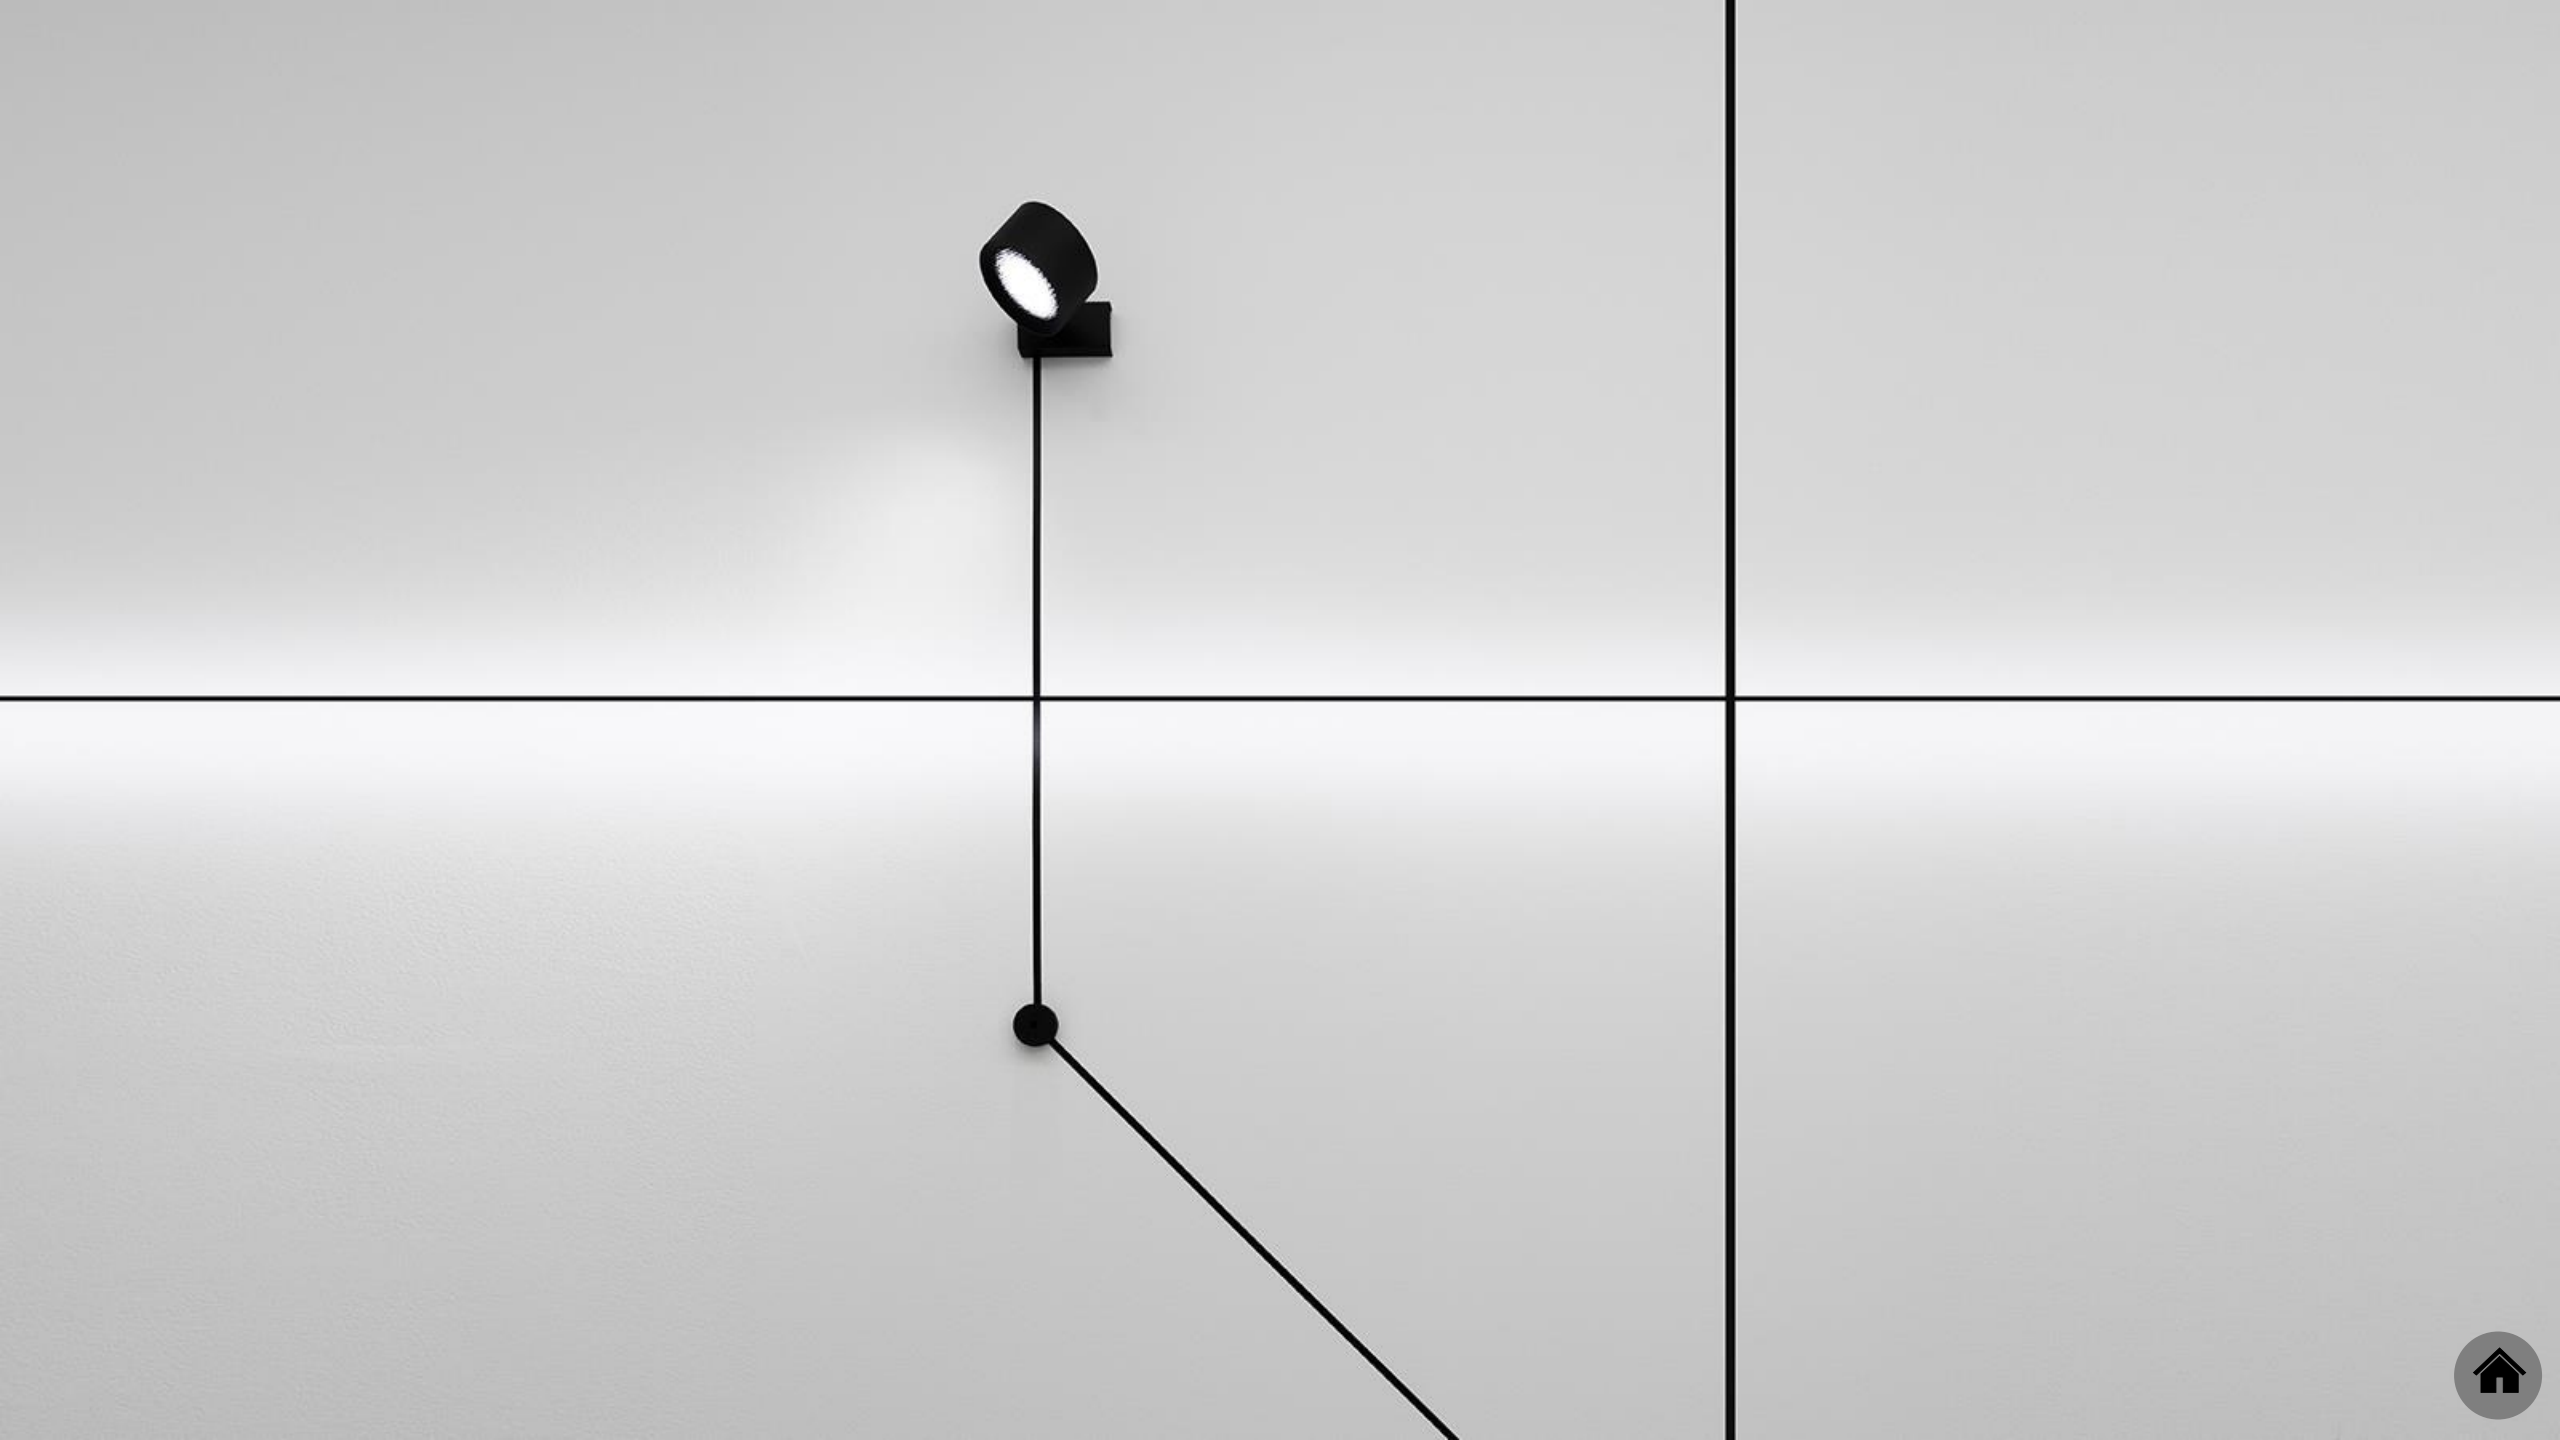

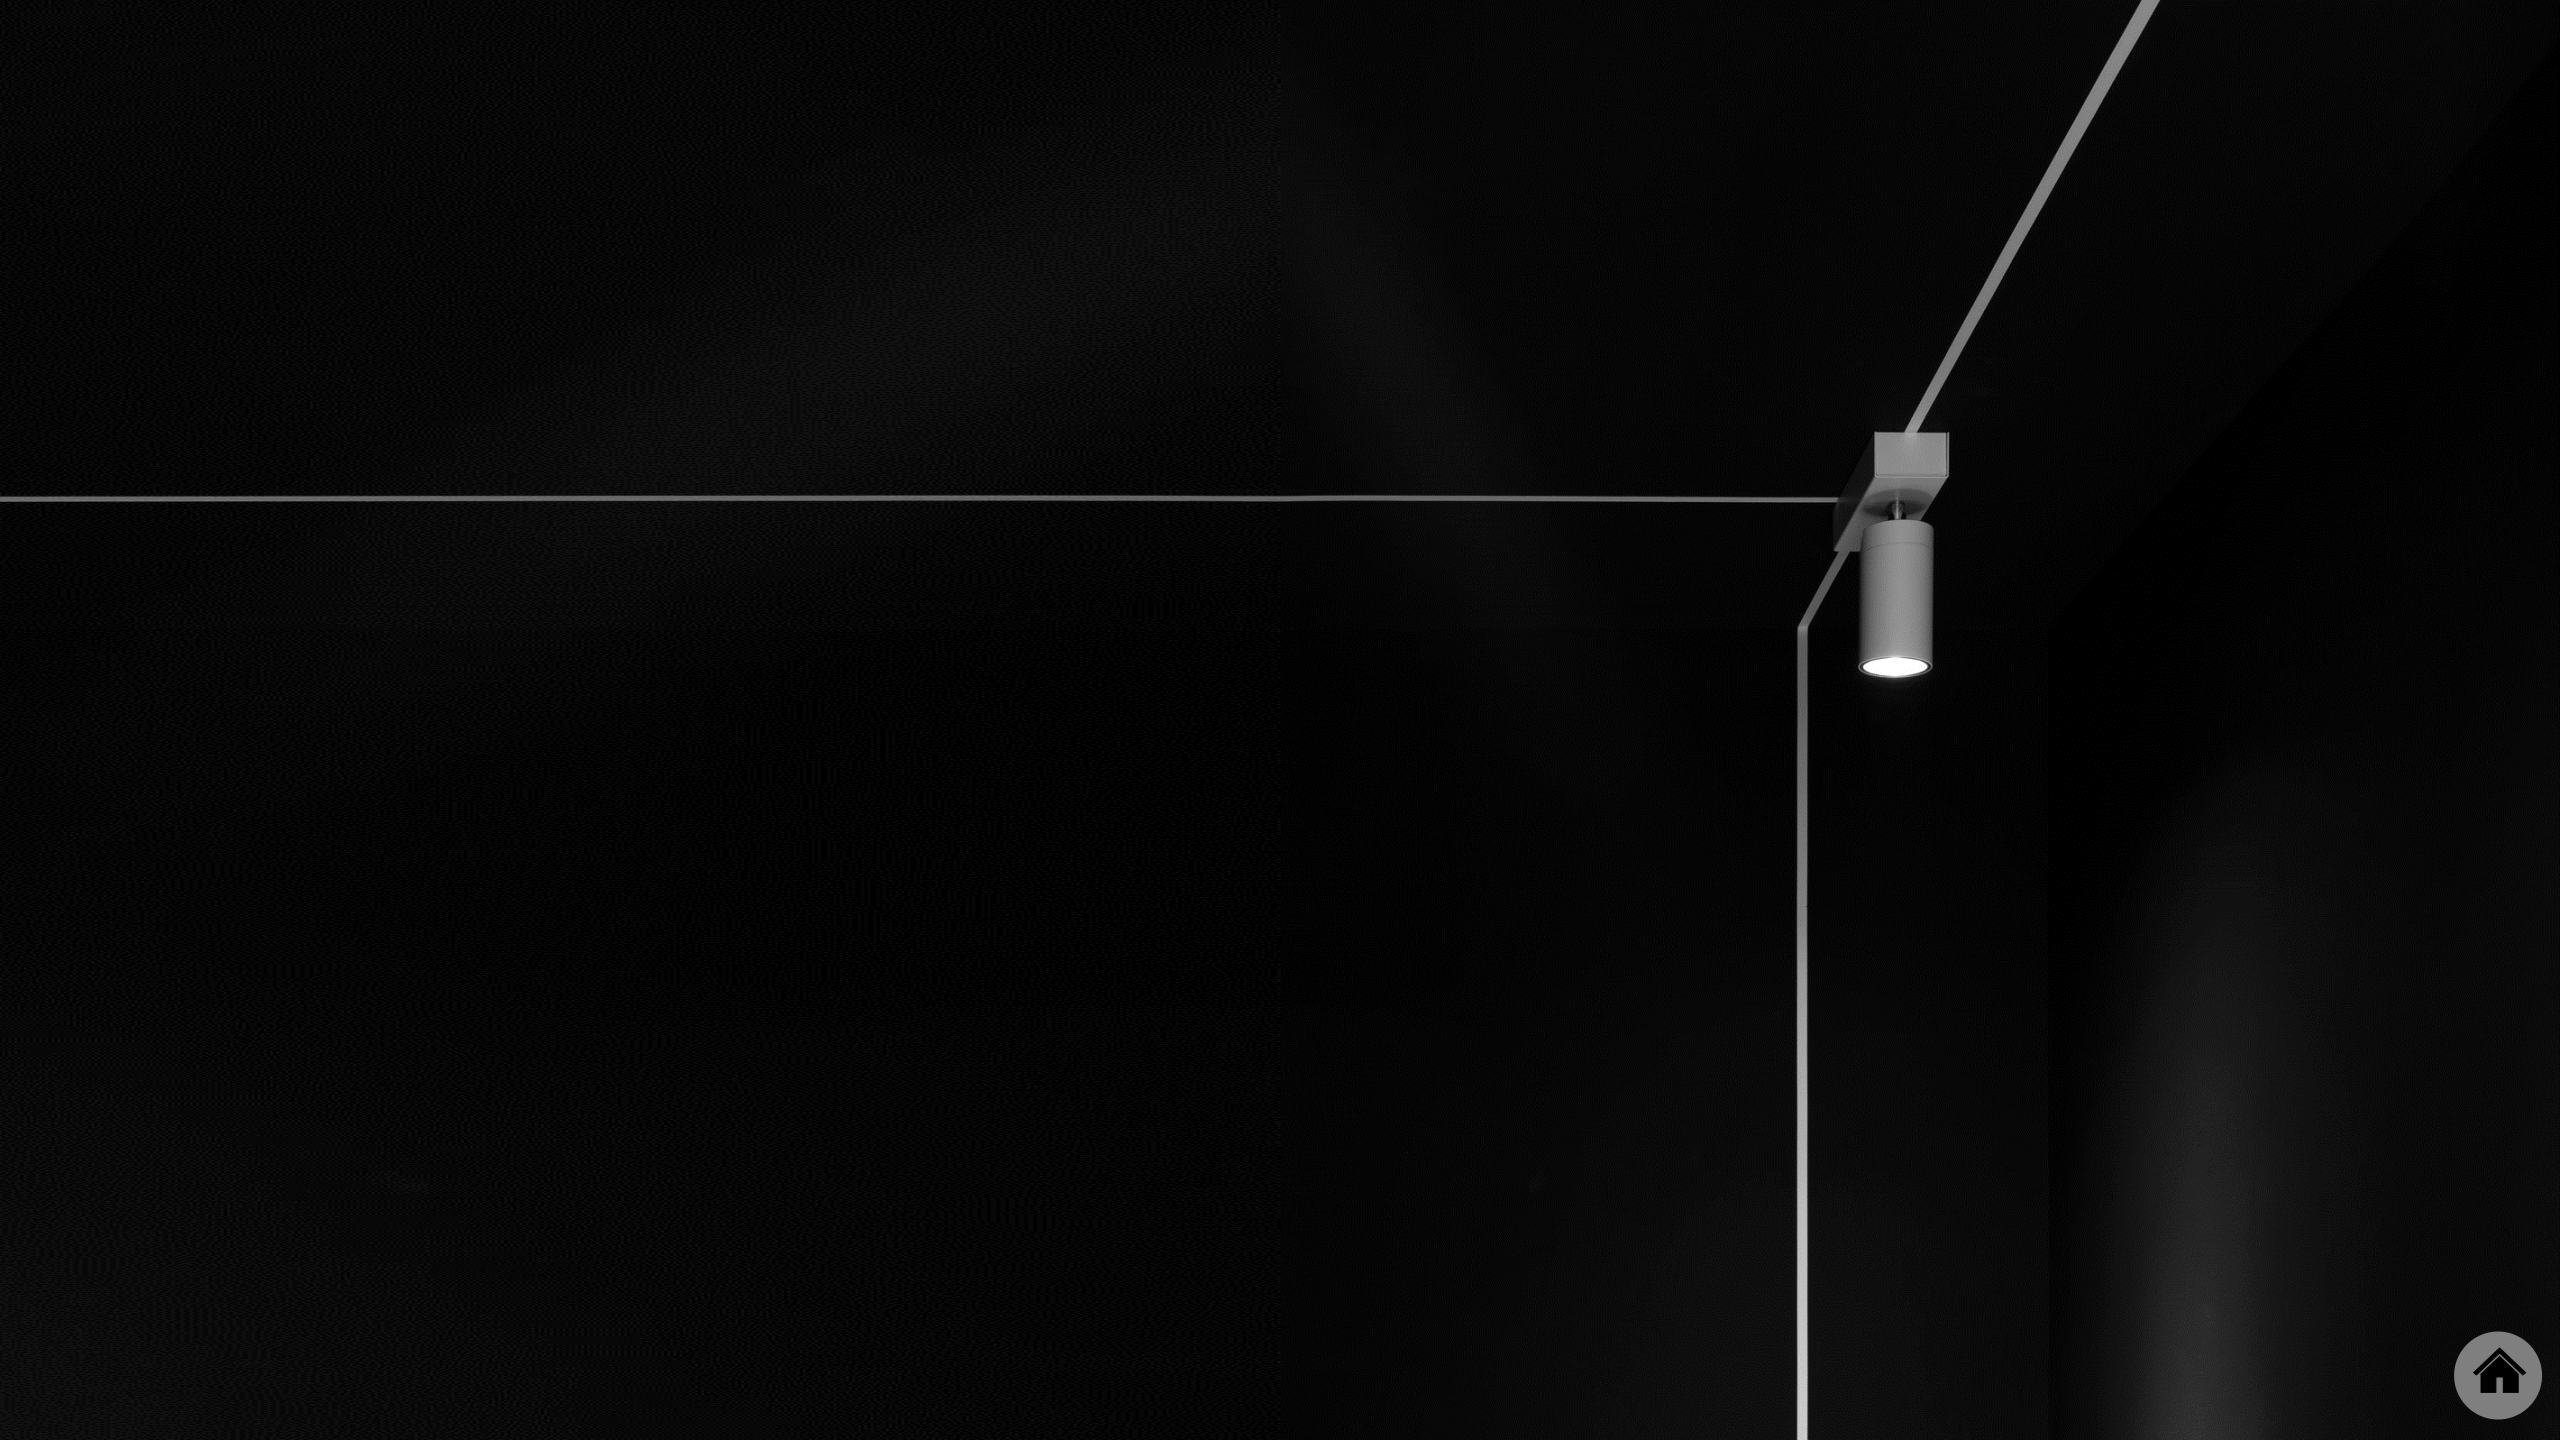

PLAY

# INFINITO / FLASH

Design Davide Groppi – 2016/2017

A spatial concept, it is continuous light.
An ultra-thin strip of special stainless steel “cuts” the space to produce indirect or diffuse light.
Infinito and Flash can be adapted to various situations, stretched from wall to wall or ceiling to floor  up to 36 metres in length (standard versions at 6 / 12 / 18 metres in length).
Infinito and Flash break down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light.
This project pays homage to the art of Lucio Fontana and his spatial concepts. The graphic force of this system is surprising. It can be integrated into space, but at the same time it becomes part of that space. Essence and absence.
Luminaires designed also to be powered by ENDLESS system.

# INFINITO

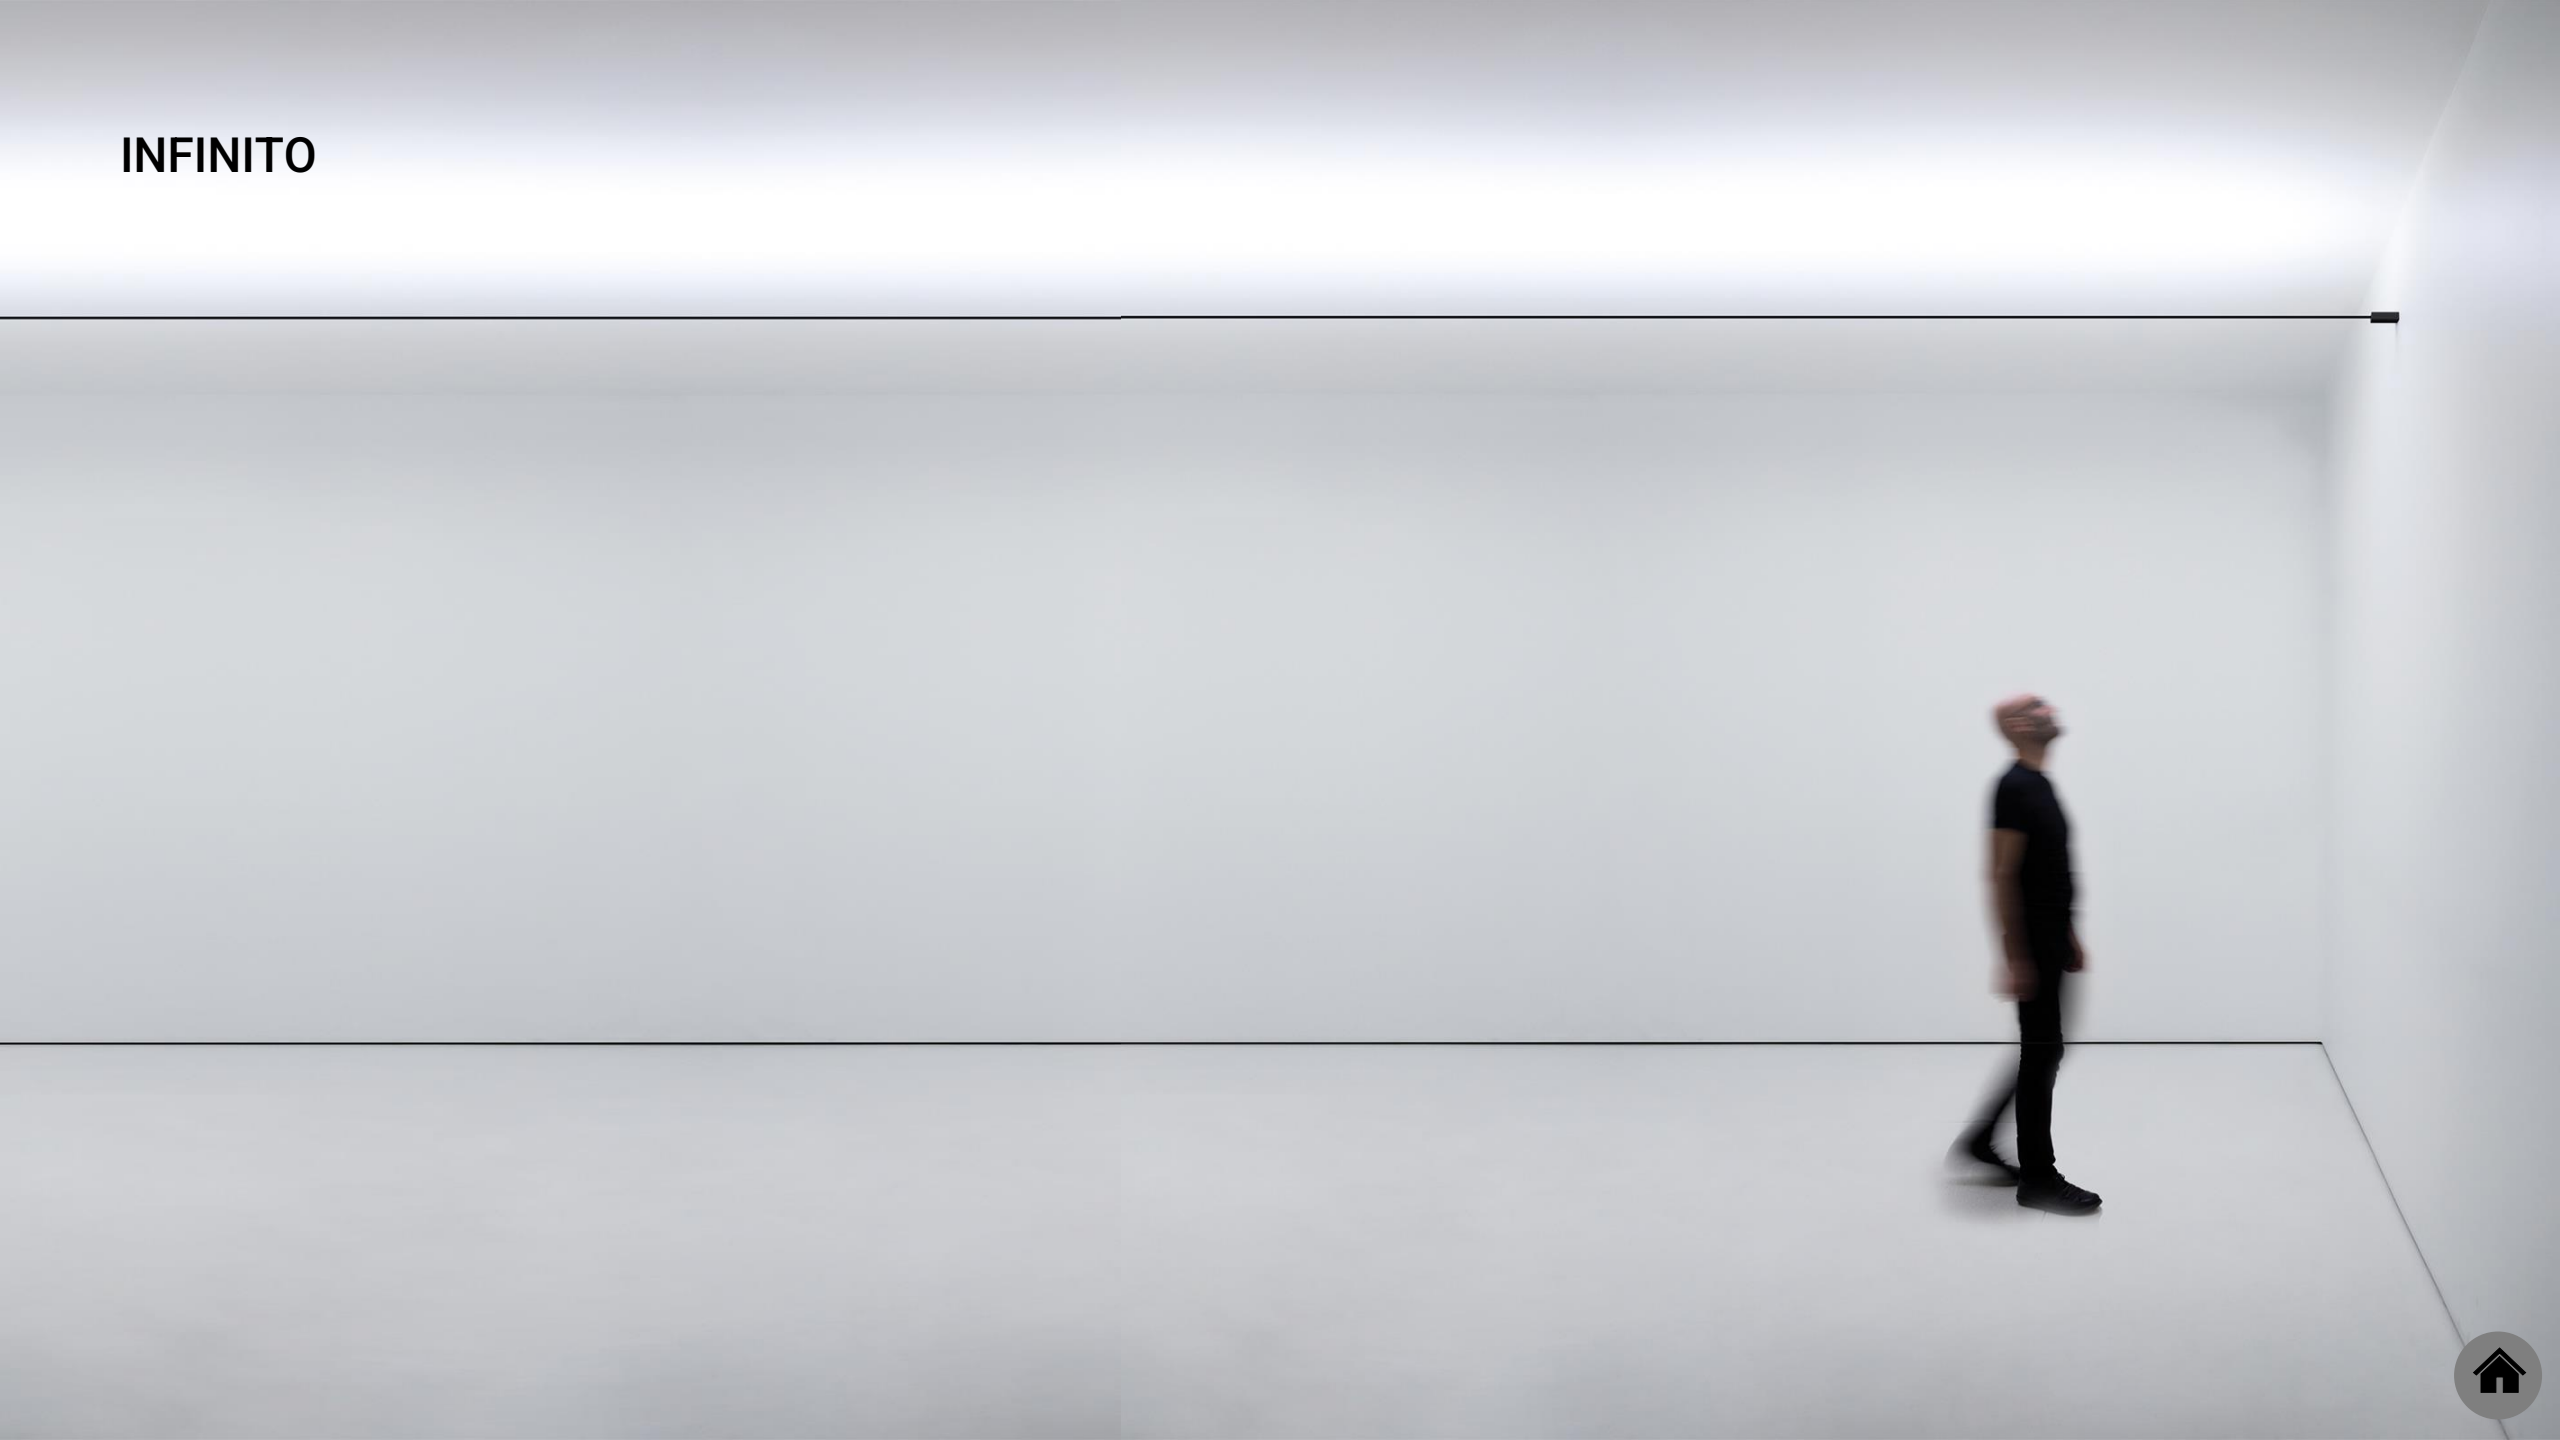

# FLASH

# INFINITO / FLASH

COMPONENTS

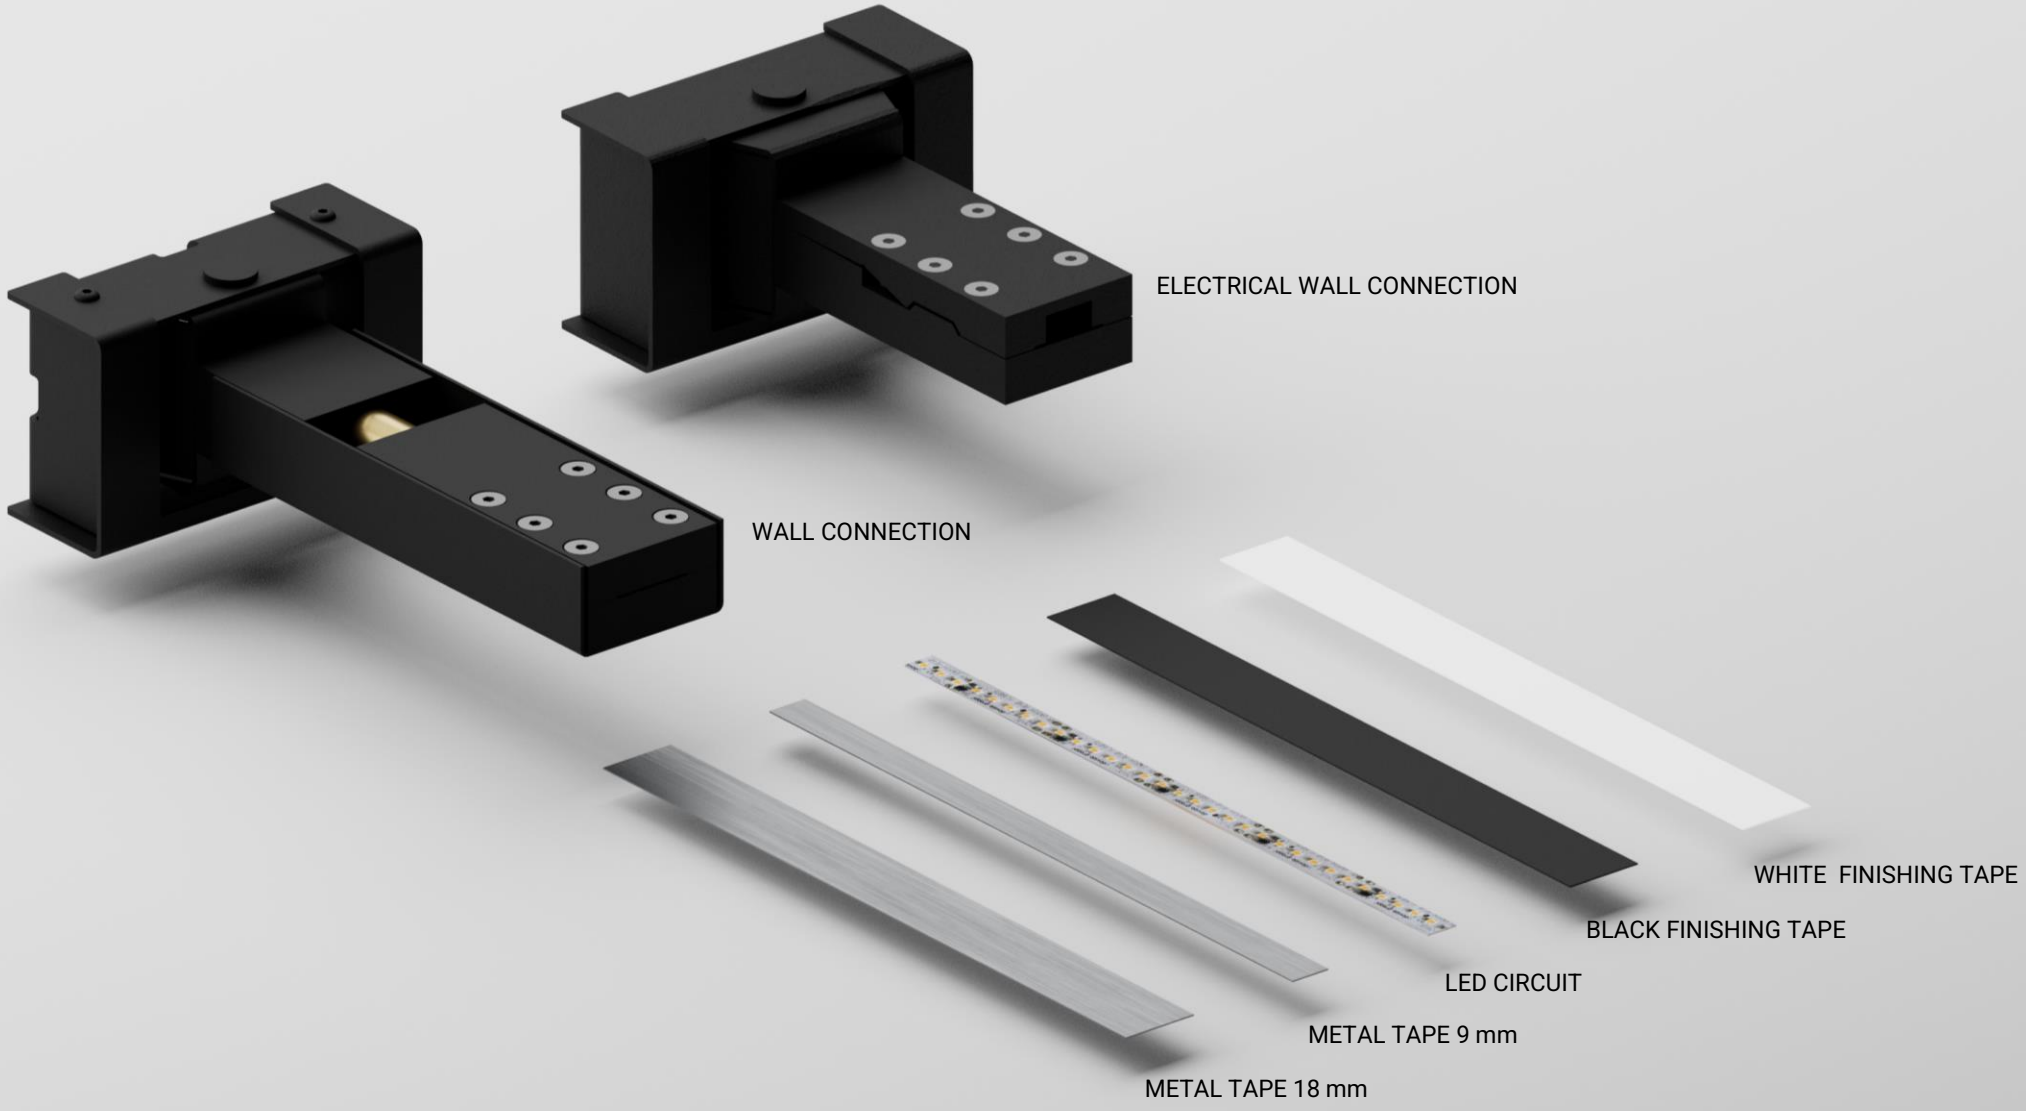

# INFINITO / FLASH

WALL CONNECTION

# INFINITO / FLASH

WALL CONNECTION

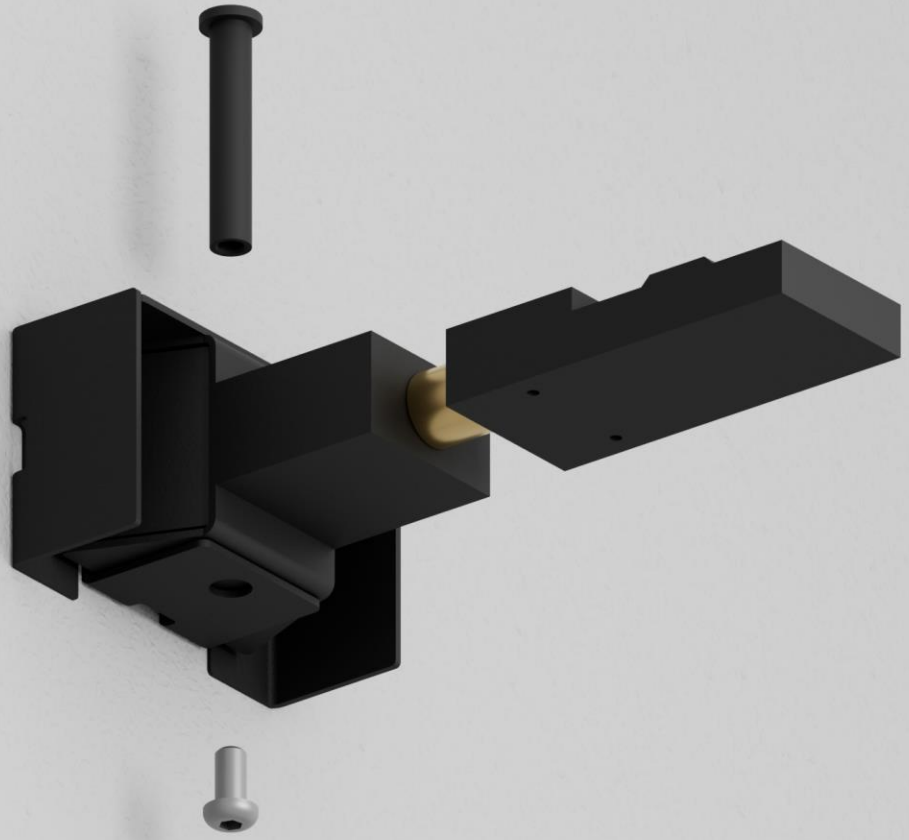

# INFINITO / FLASH

WALL CONNECTION

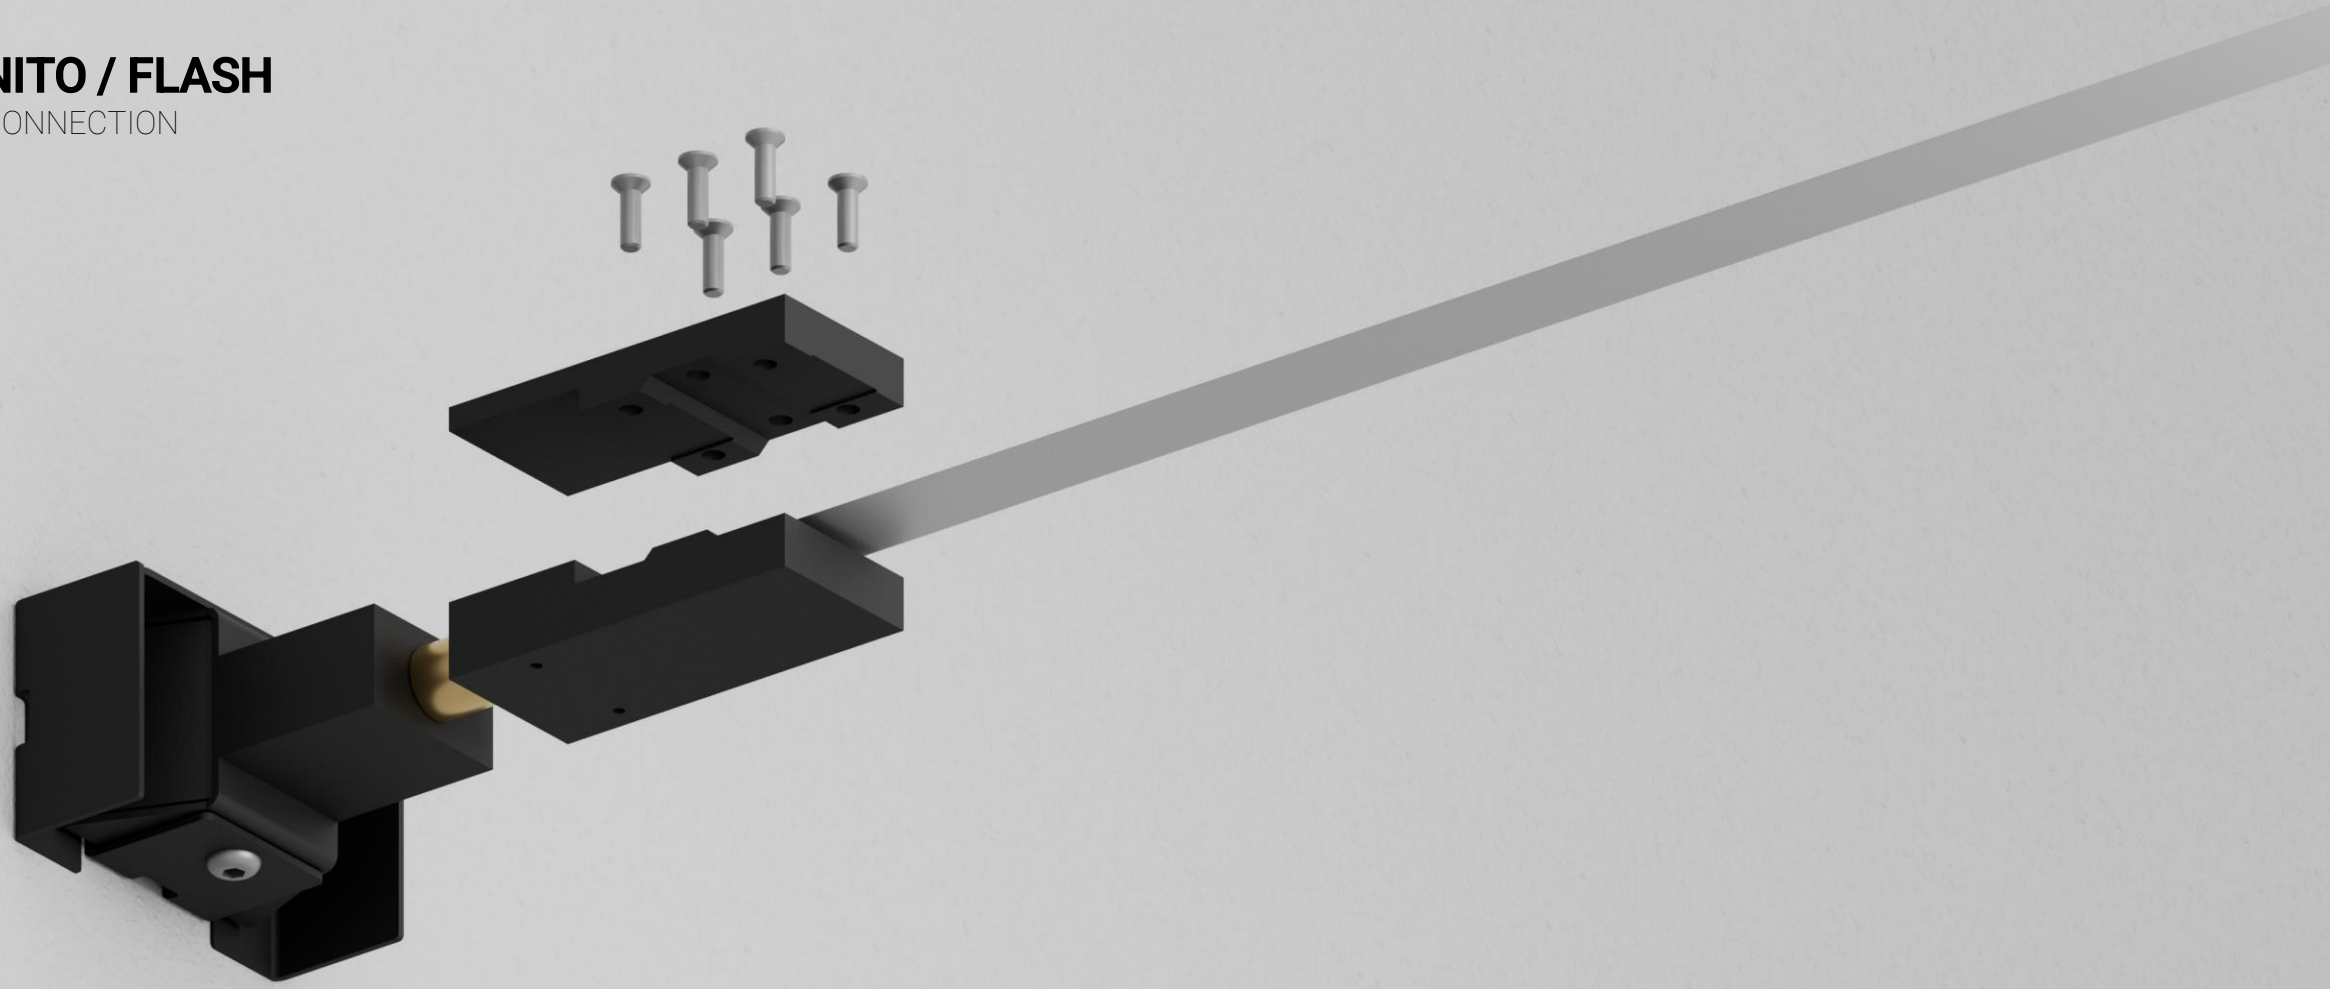

# INFINITO / FLASH

WALL CONNECTION

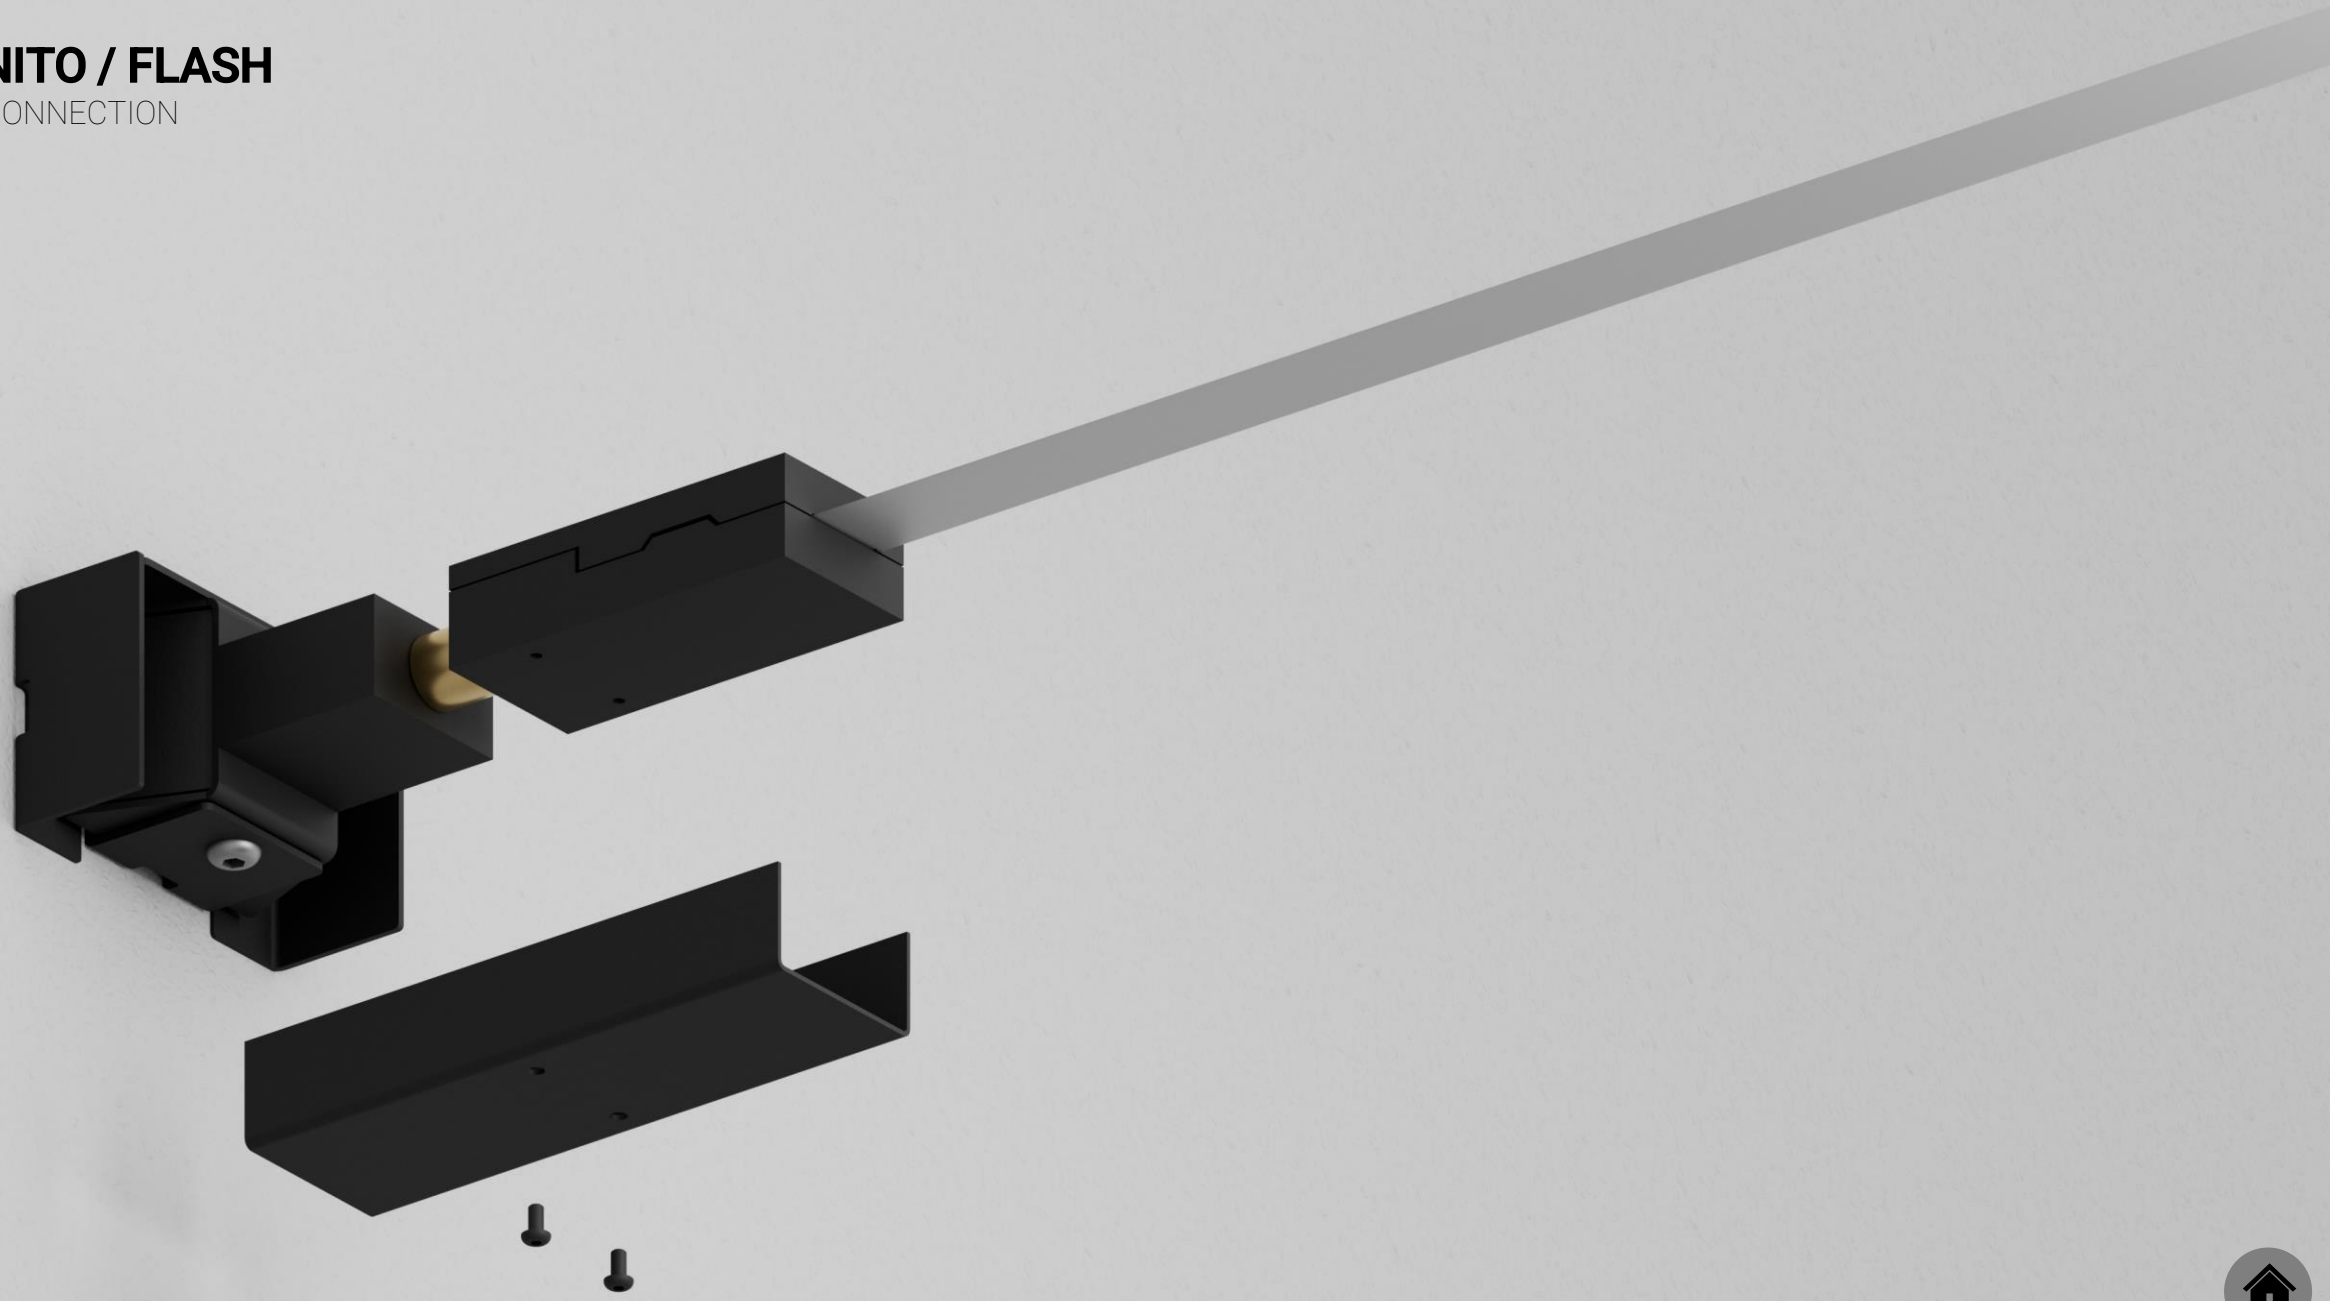

# INFINITO / FLASH

WALL CONNECTION

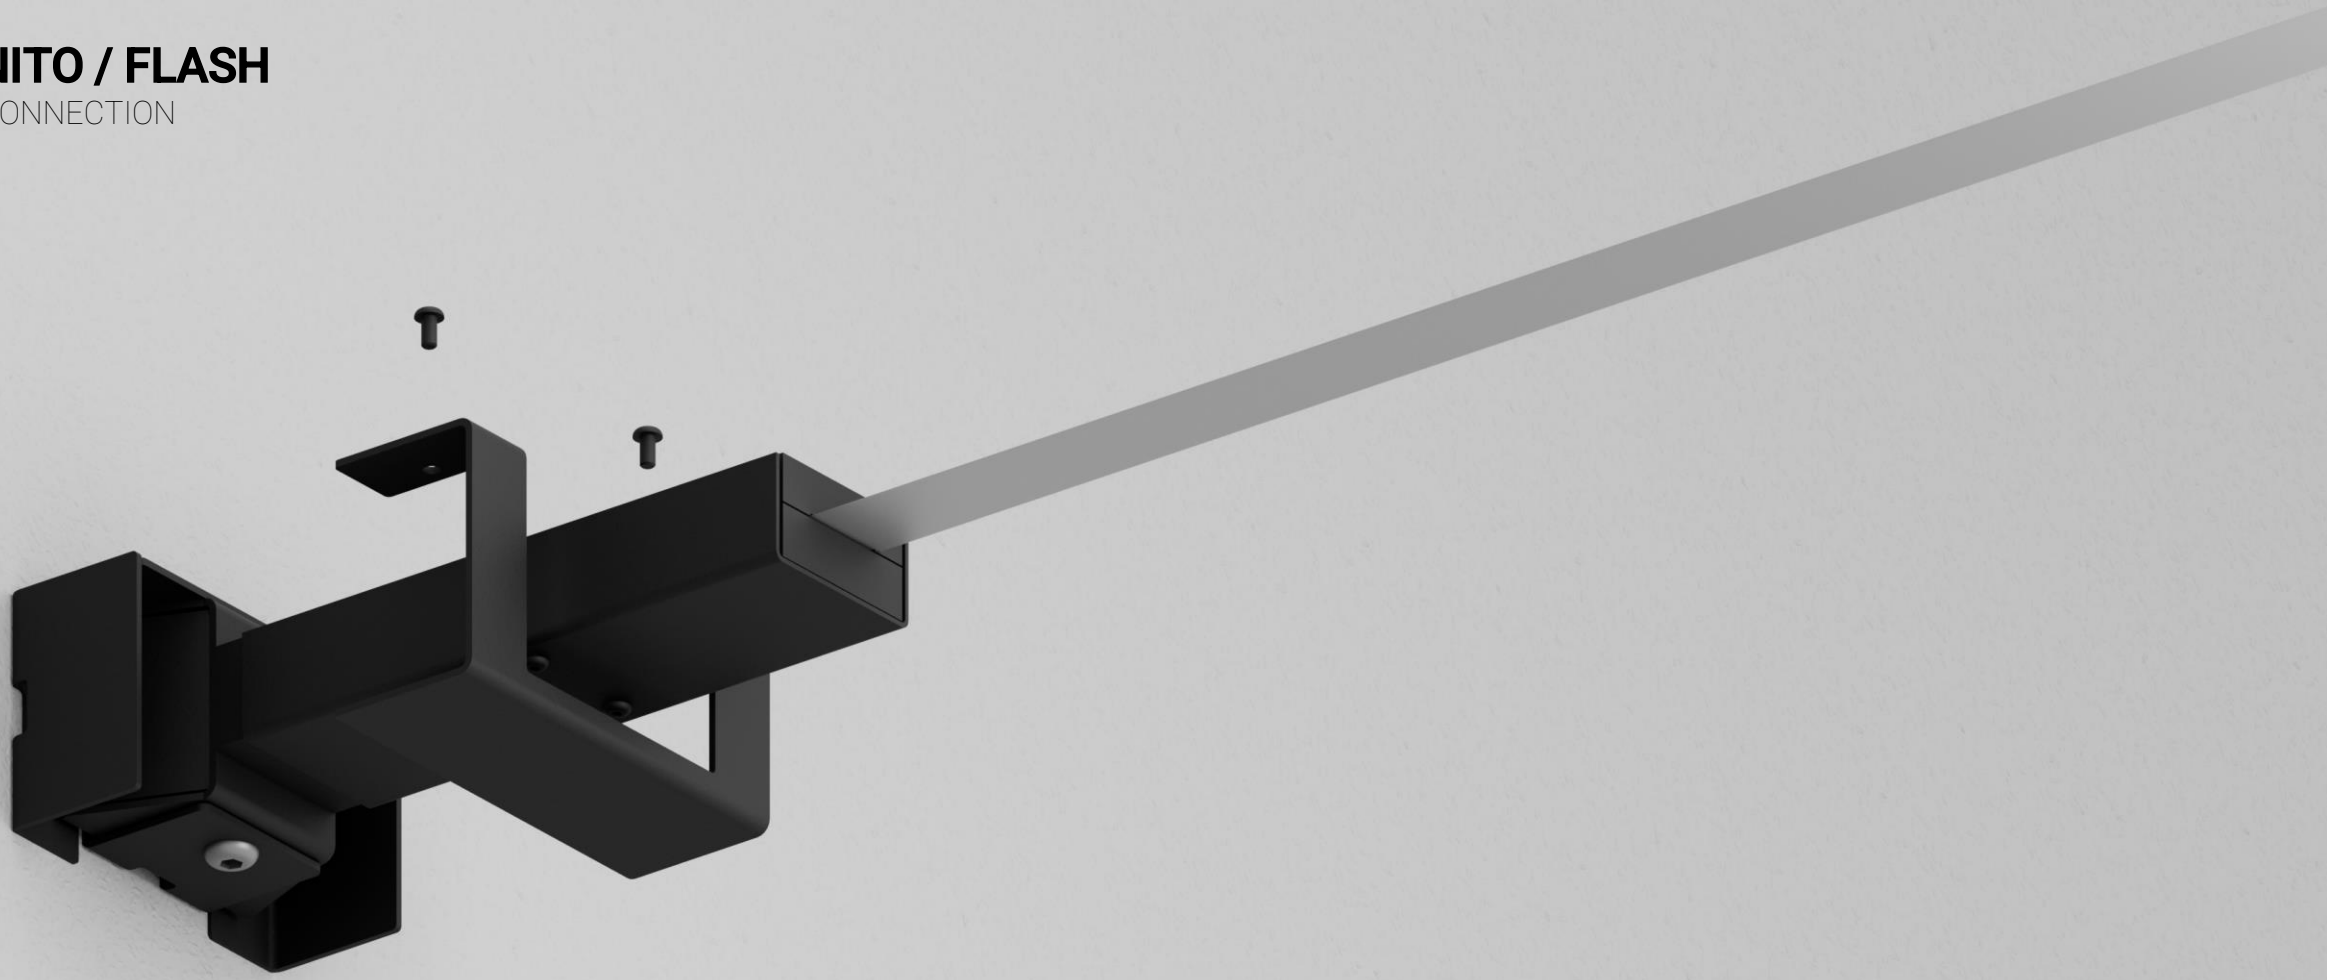

# INFINITO / FLASH

WALL CONNECTION

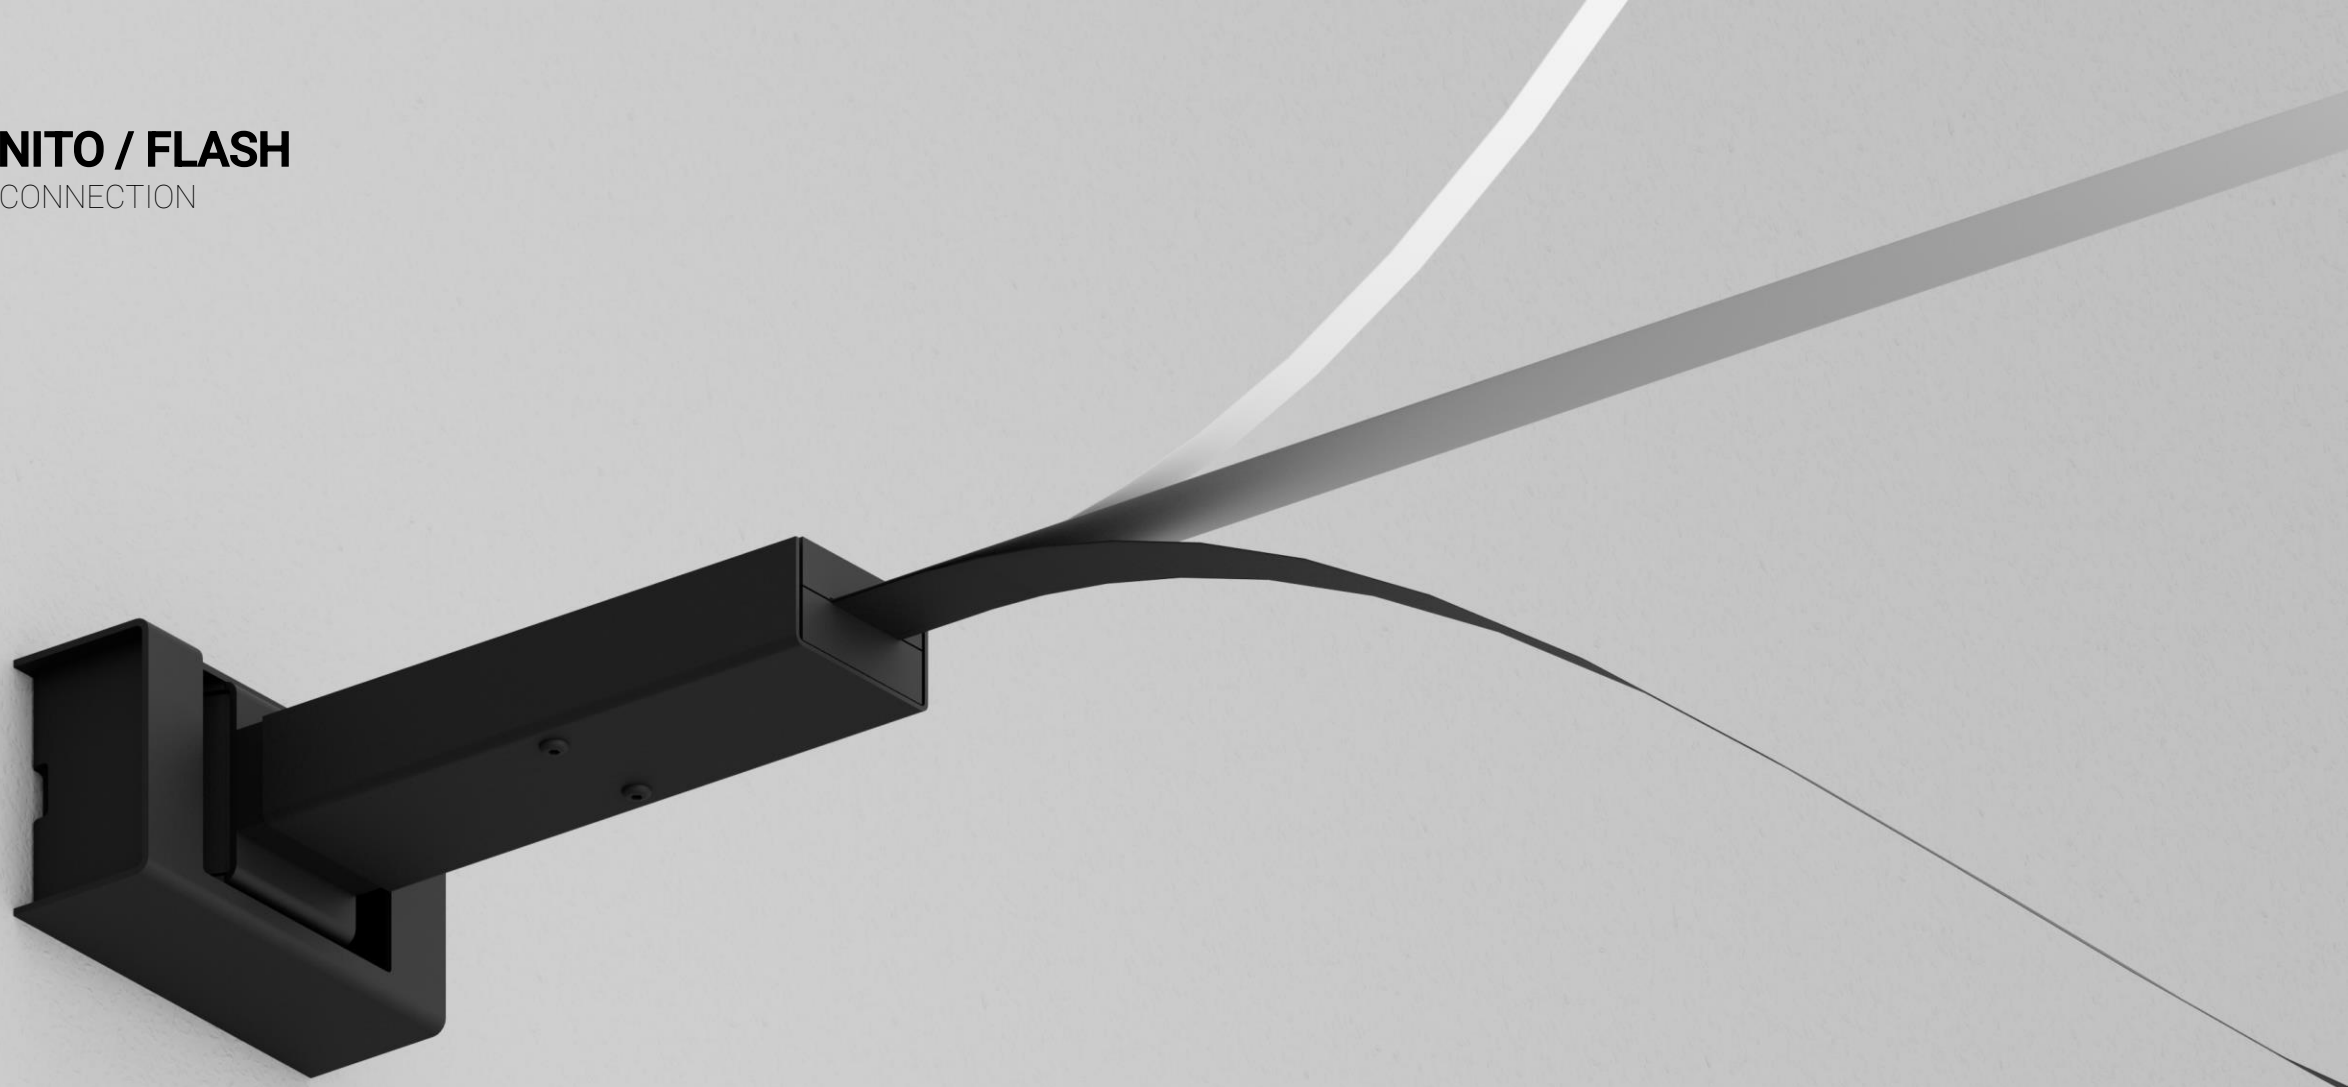

# INFINITO / FLASH

WALL CONNECTION

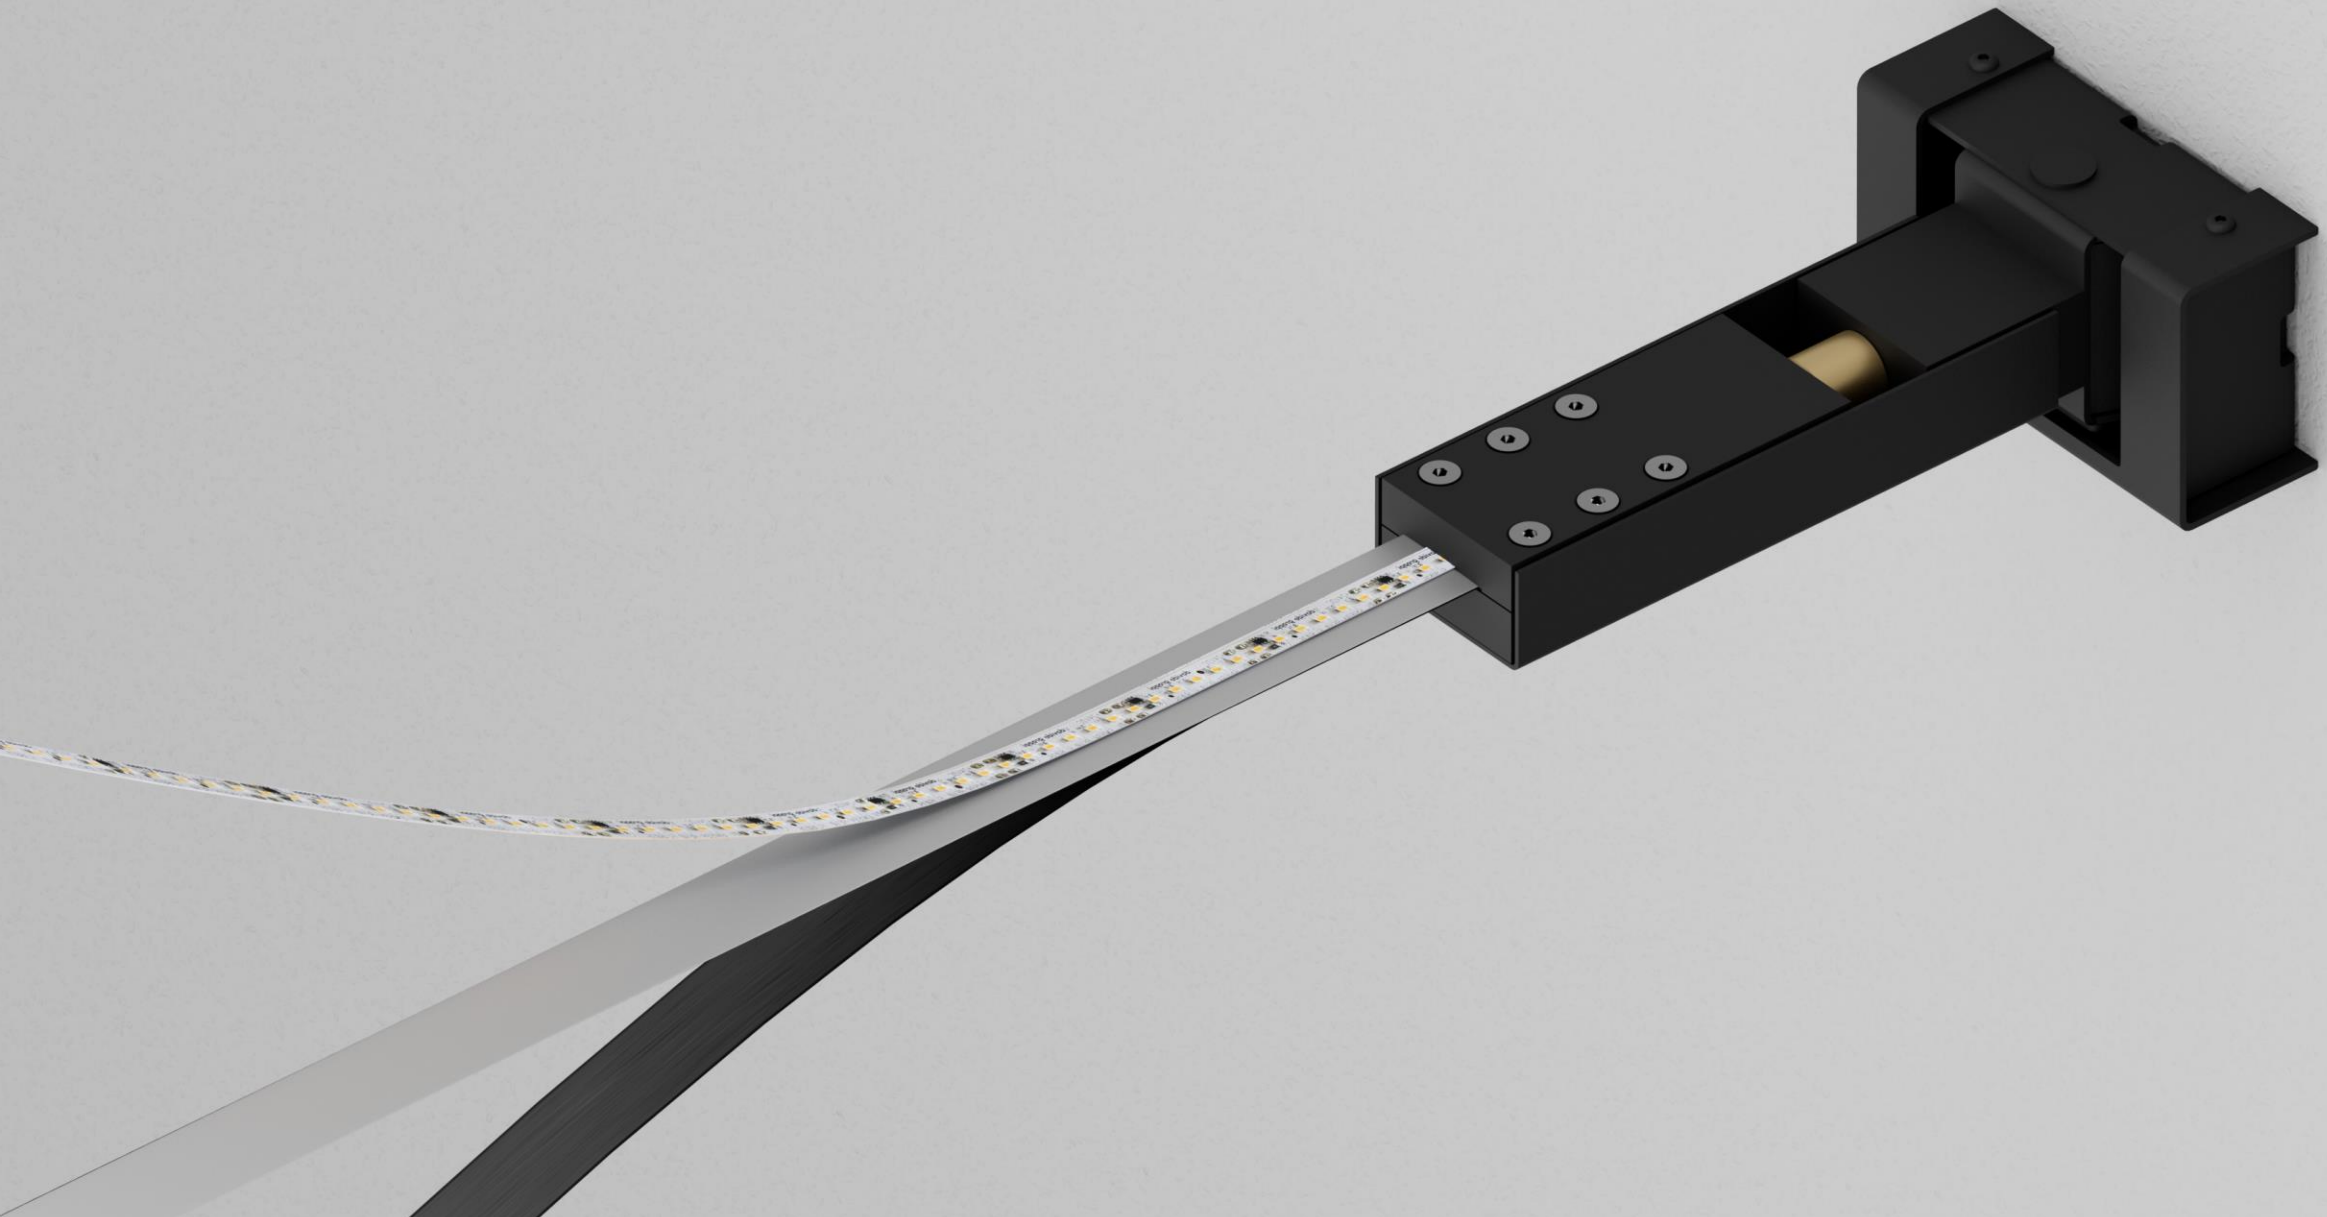

# INFINITO / FLASH

WALL CONNECTION

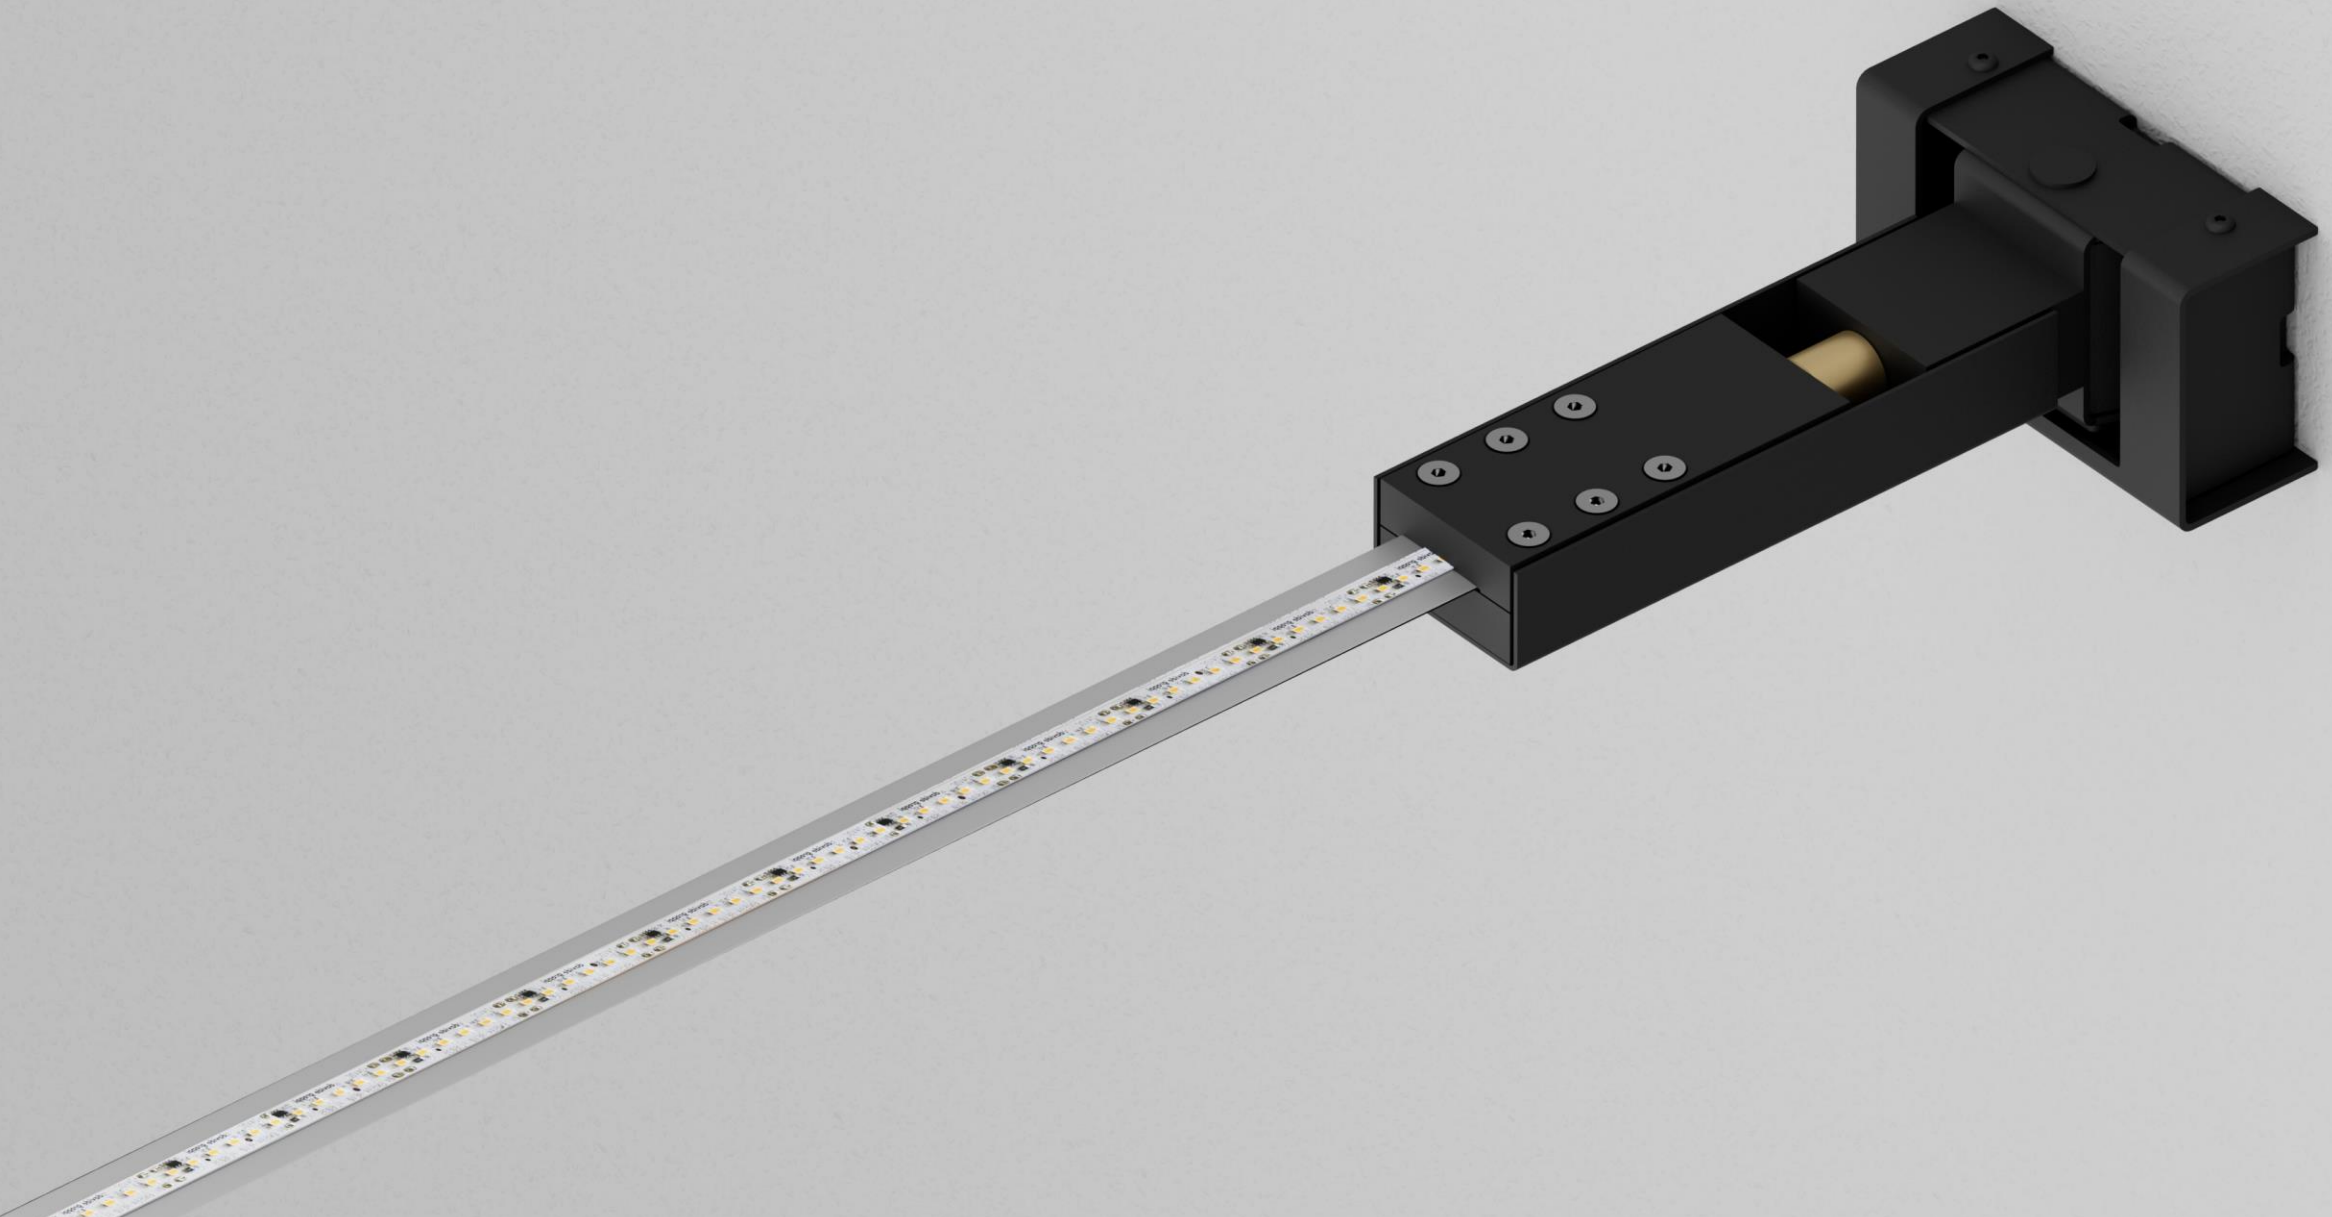

# INFINITO / FLASH

WALL CONNECTION

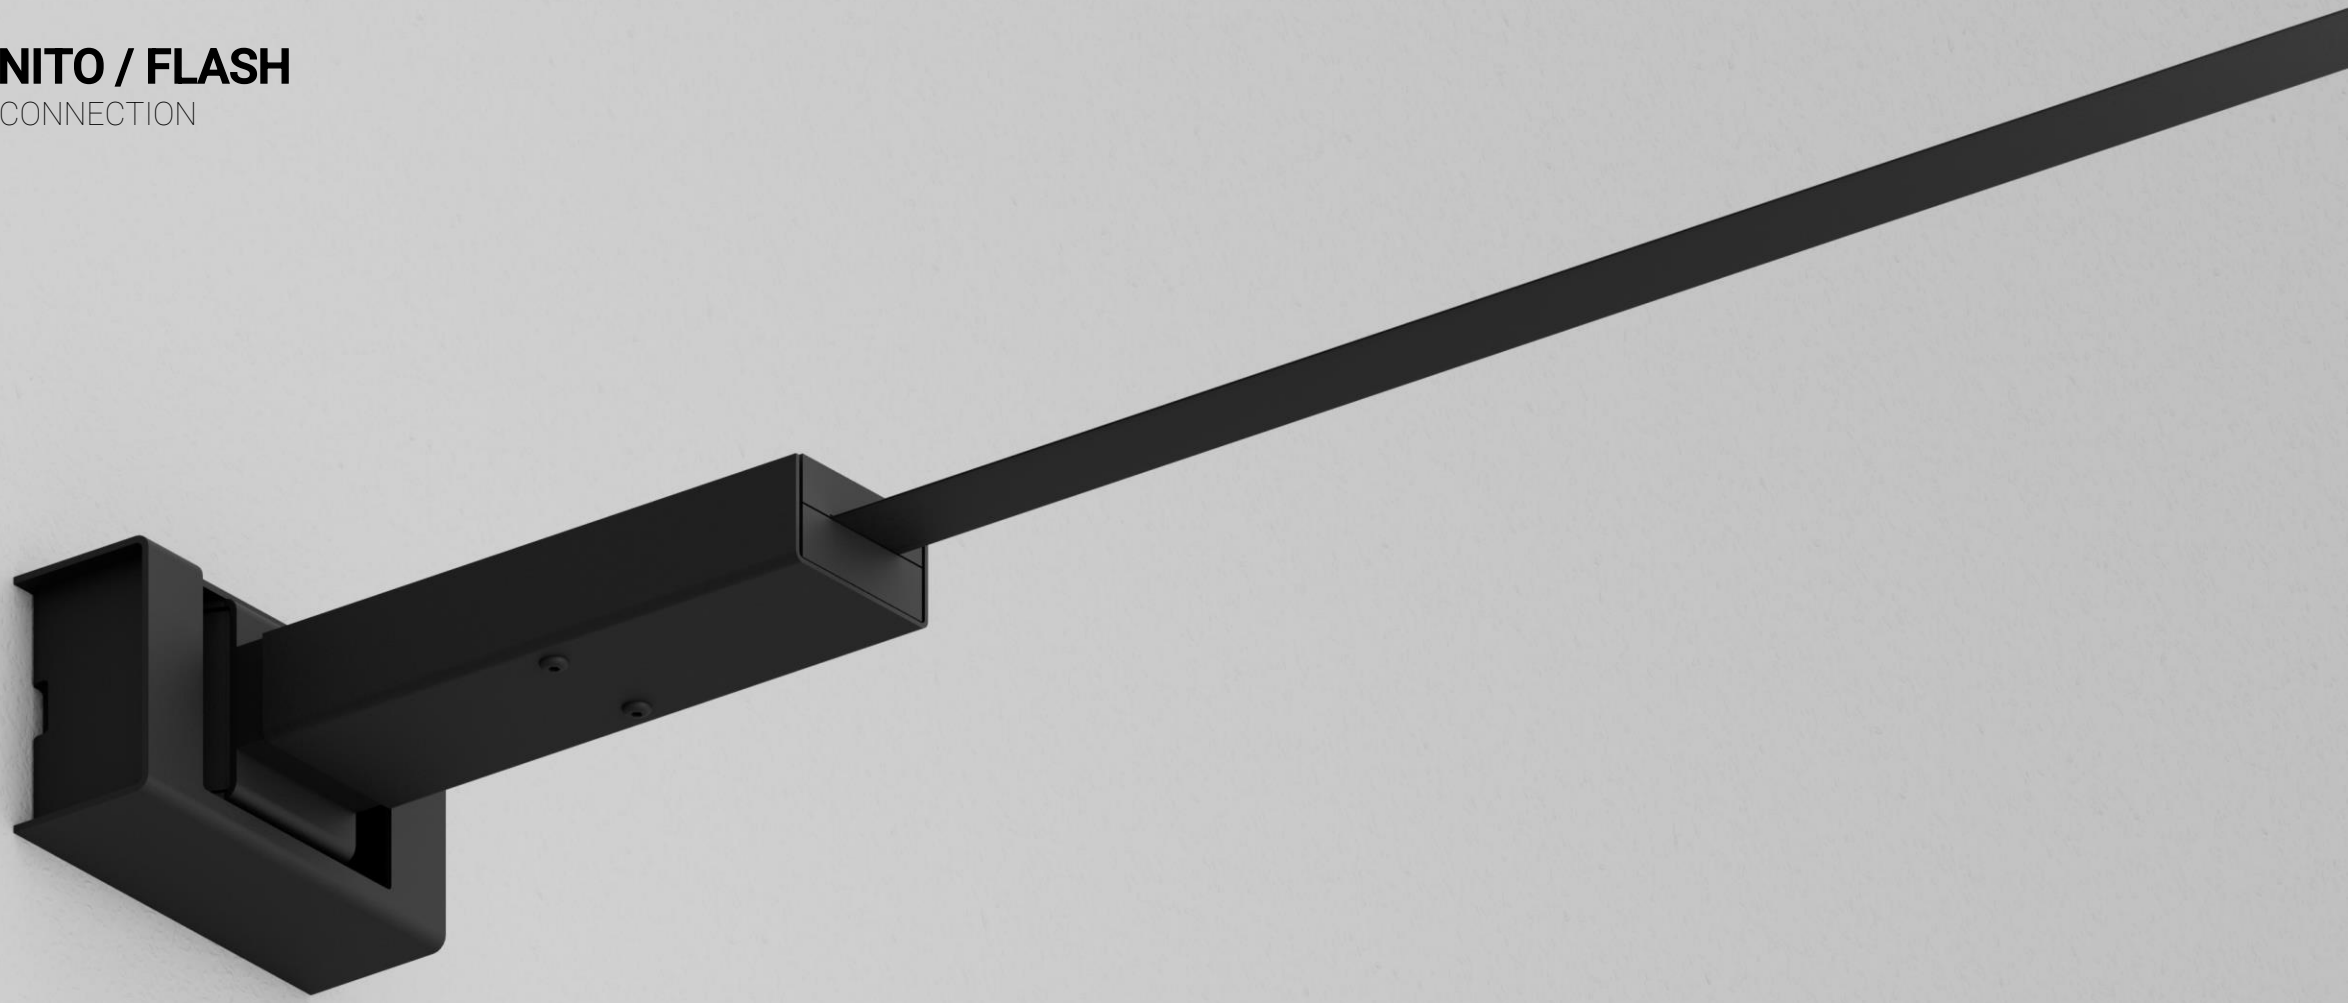

# INFINITO / FLASH

WALL CONNECTION

RIGHT TILT UP TO 30°

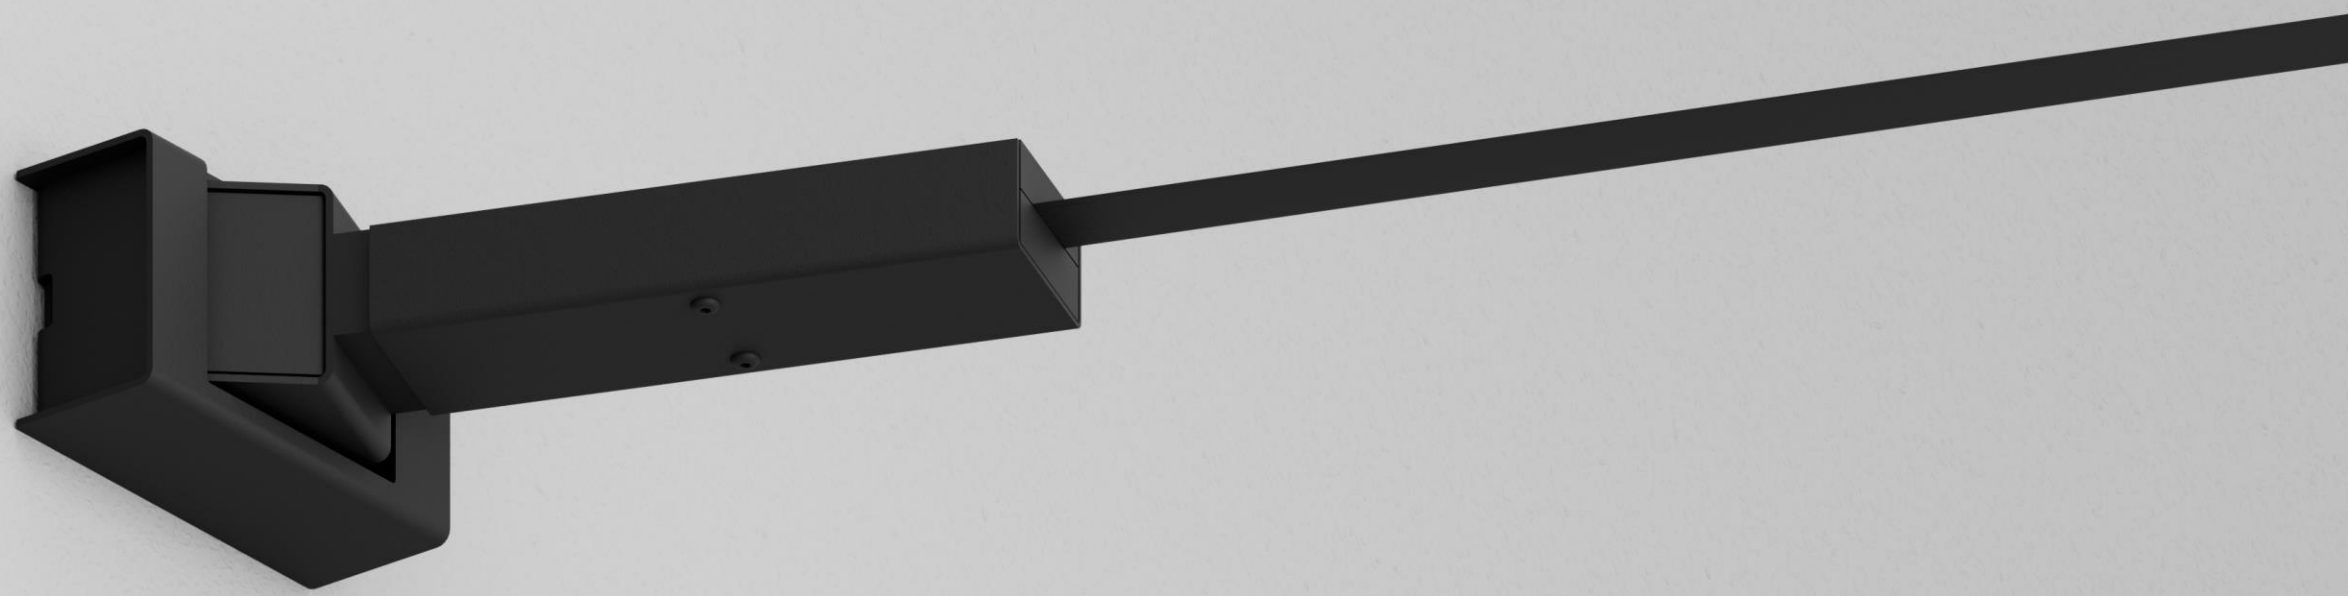

# INFINITO / FLASH

WALL CONNECTION

LEFT TILT UP TO 30°

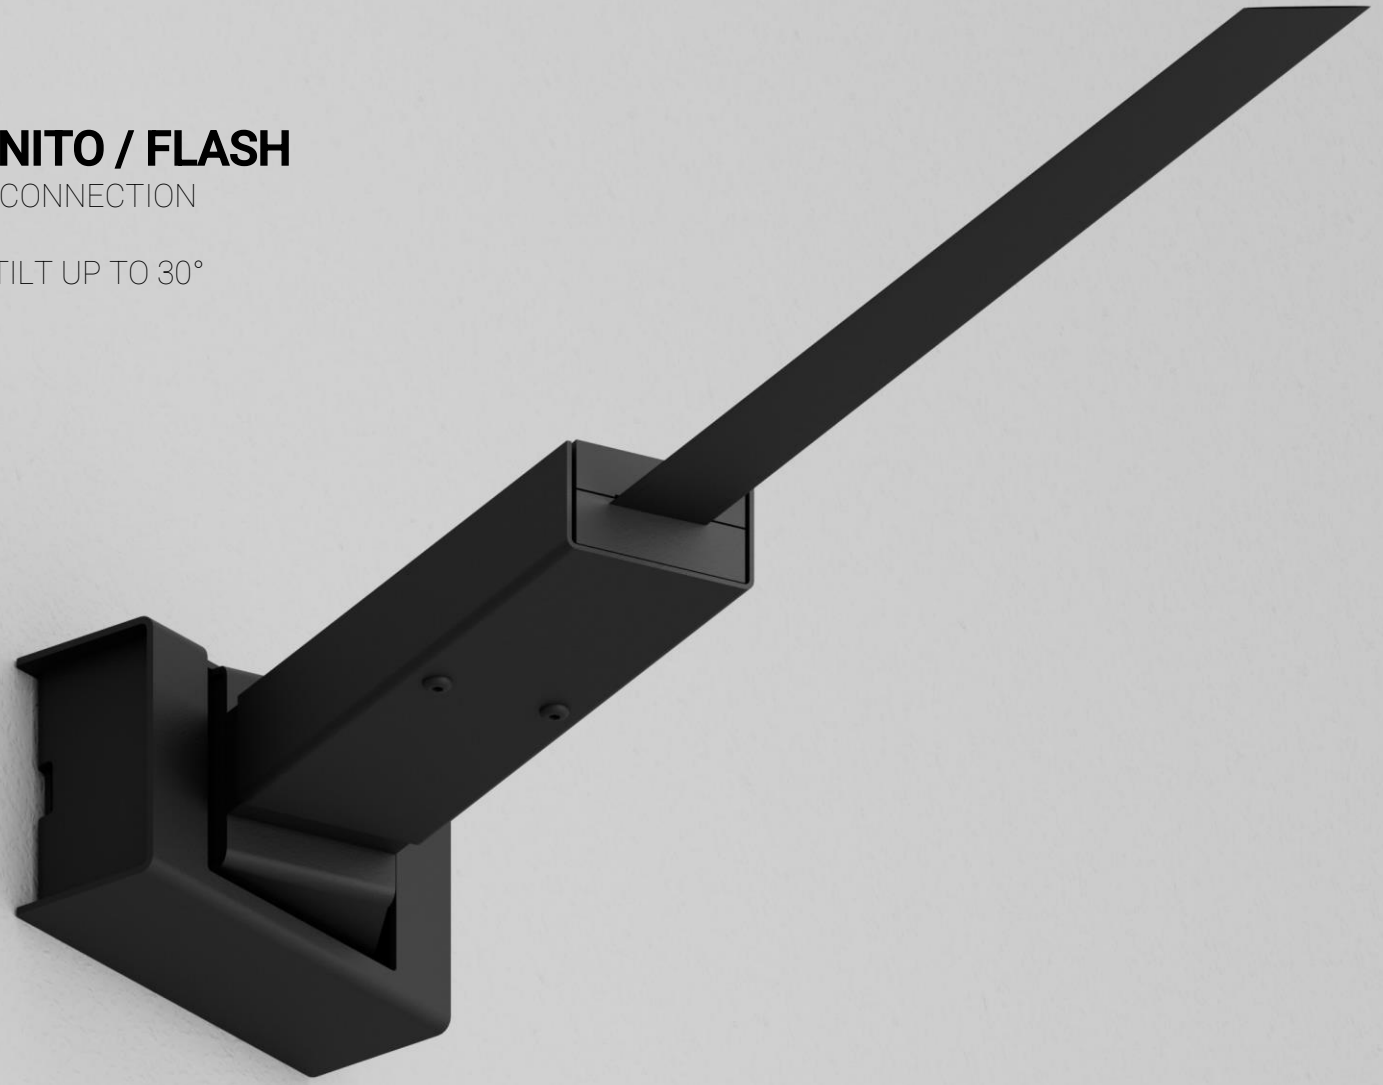

# INFINITO / FLASH

WALL CONNECTION

BLACK FINISHING

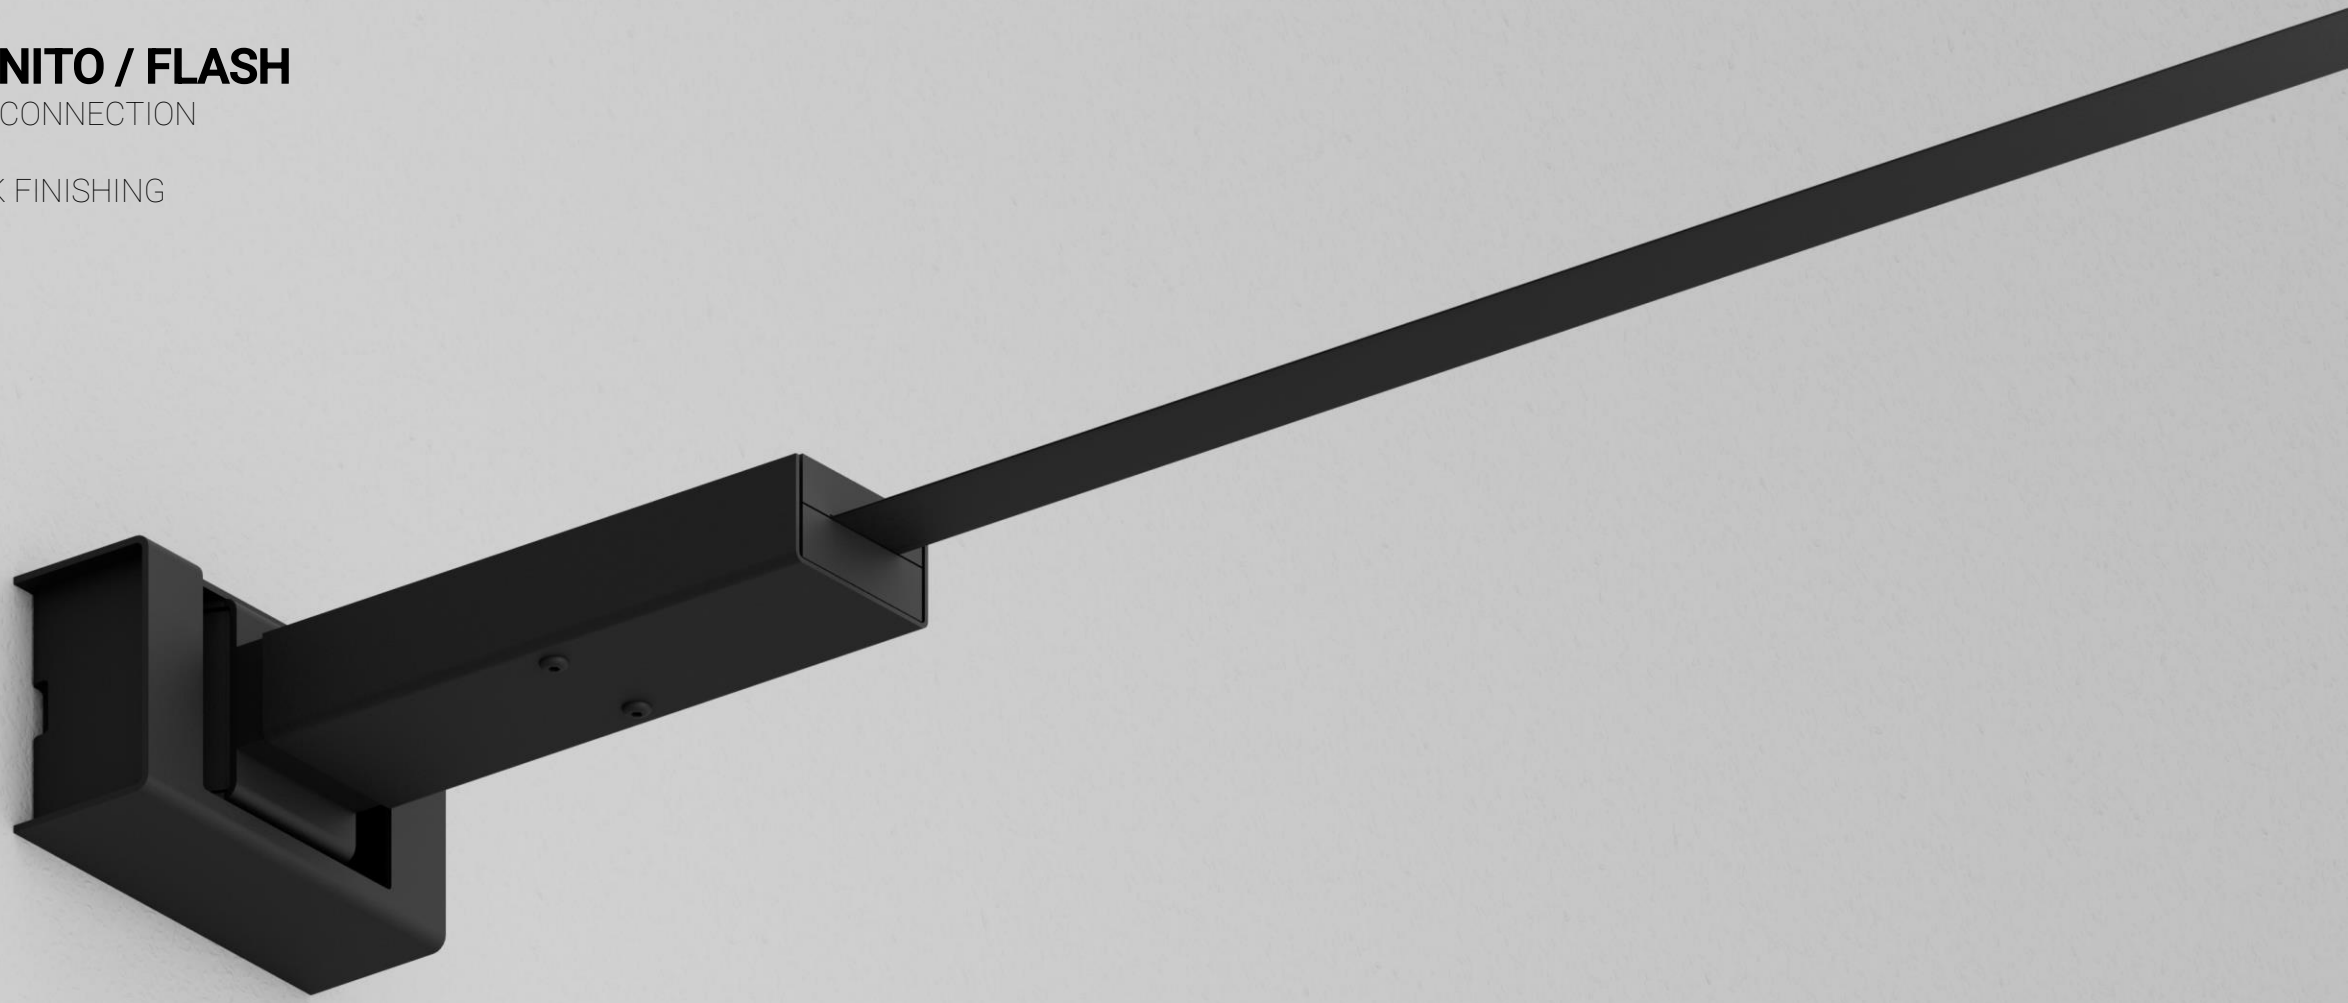

# INFINITO / FLASH

WALL CONNECTION

WHITE FINISHING

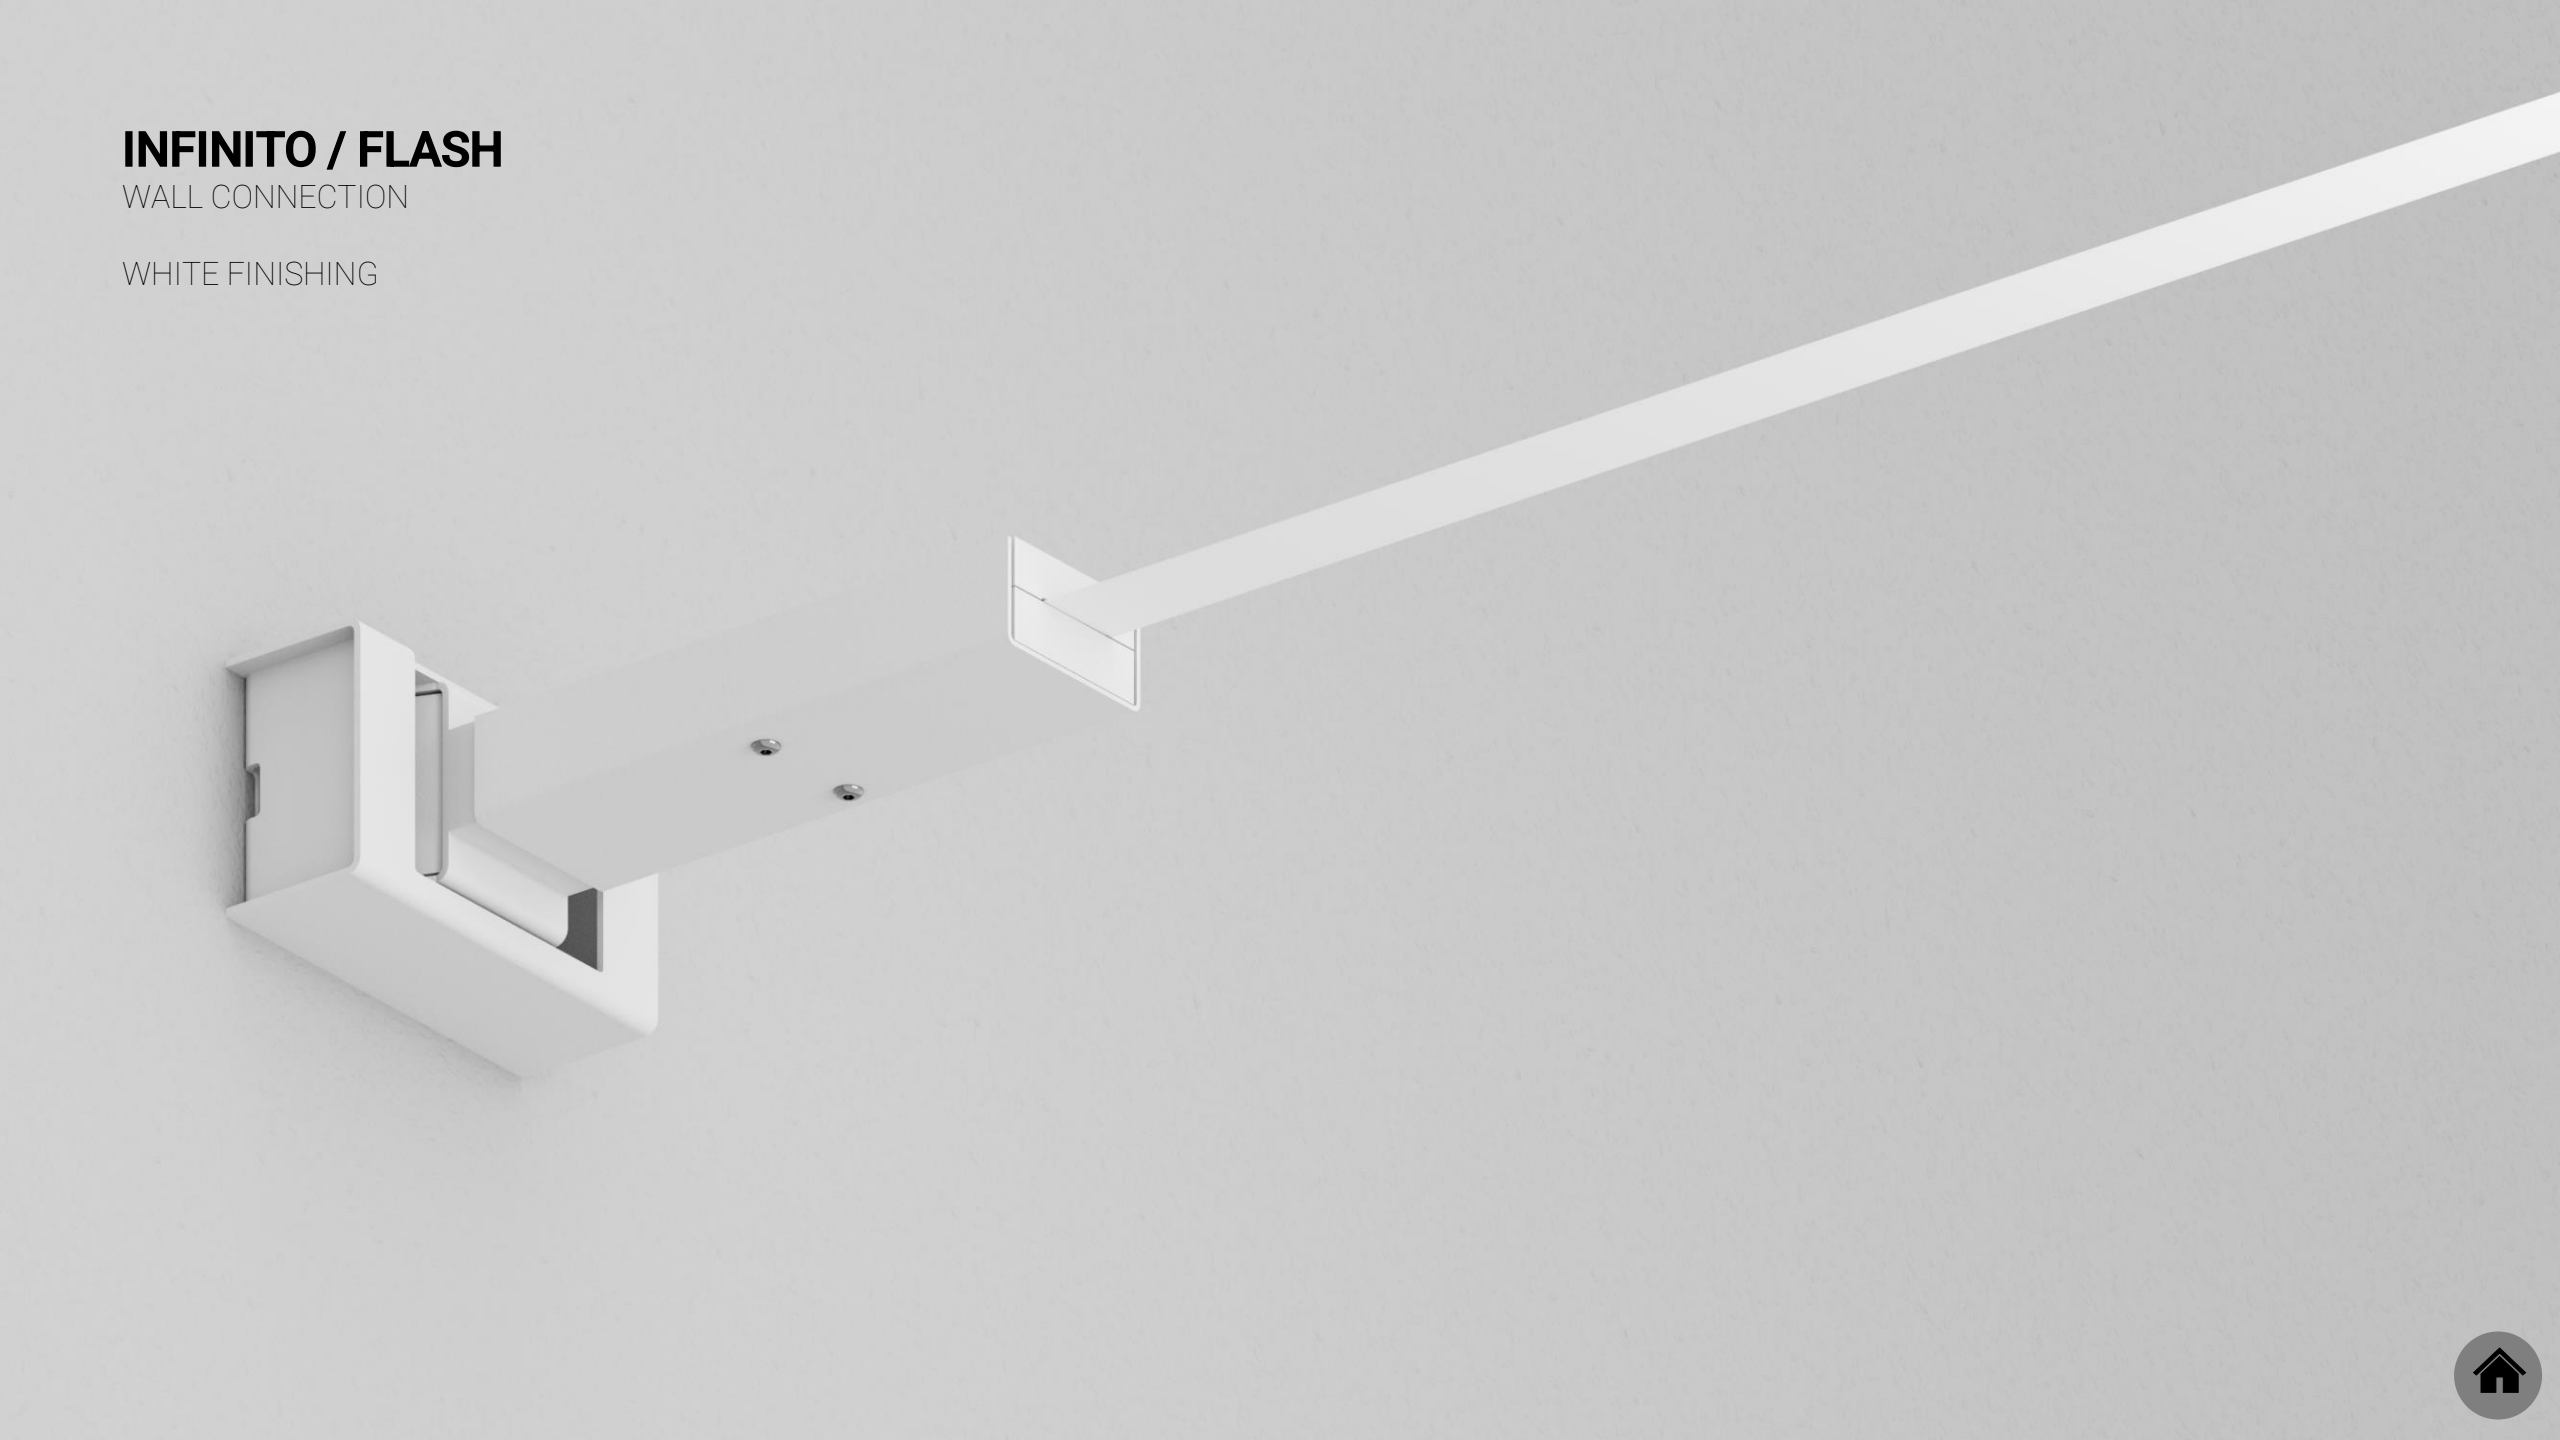

# INFINITO / FLASH

WALL CONNECTION

SPECIAL GOLD FINISHING

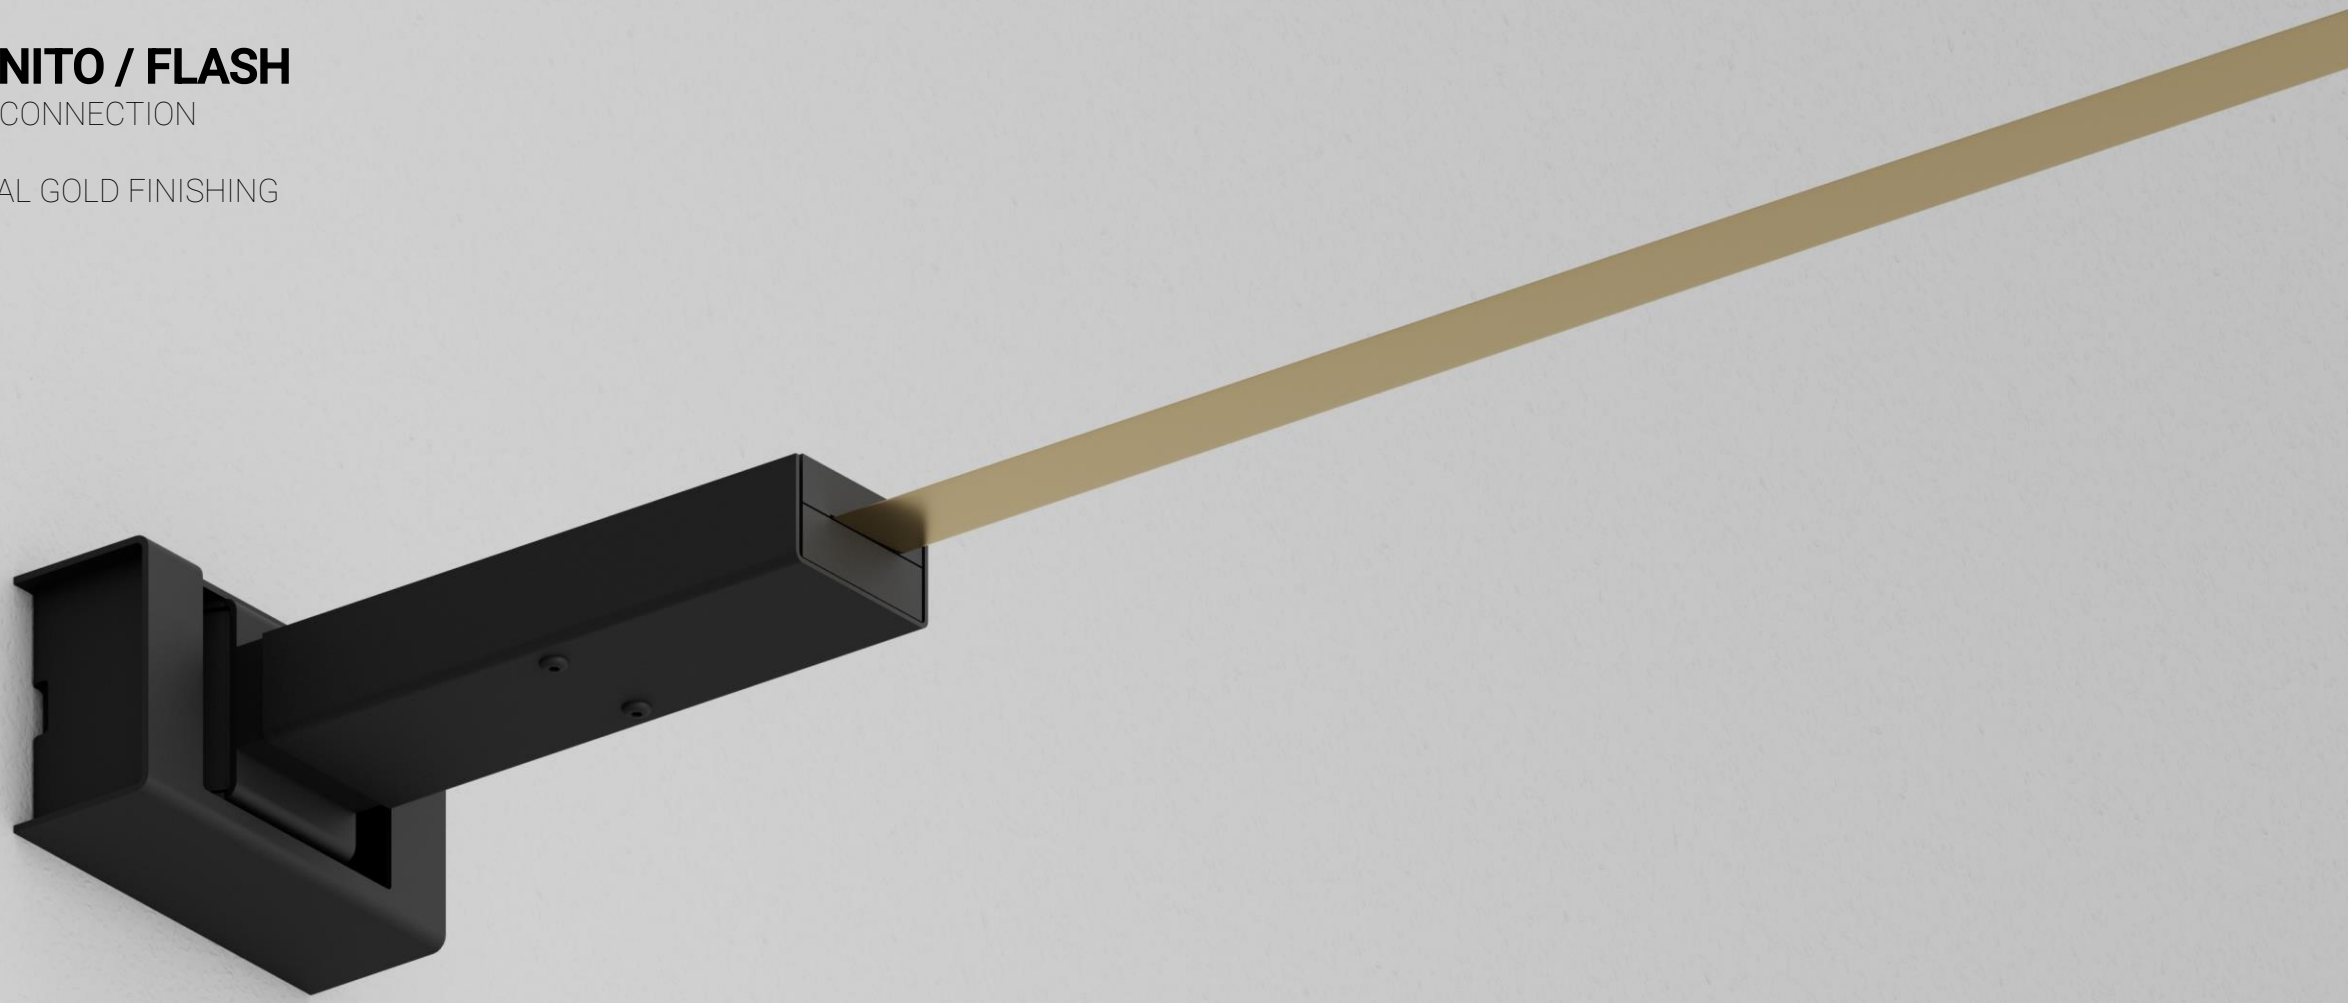

# INFINITO / FLASH

ACCESSORIES

CEILING INSTALLATION KIT

SWALLOW

SPACER

KIT WALL CONNECTION SLOPED 75° (RIGHT / LEFT)

KIT WALL CONNECTION VERTICAL SLOPED 45°

# INFINITO / FLASH

ACCESSORIES

CEILING INSTALLATION KIT

SWALLOW

SPACER

KIT WALL CONNECTION SLOPED 75° (RIGHT / LEFT)

KIT WALL CONNECTION VERTICAL SLOPED 45°

# INFINITO / FLASH

SPACER

# INFINITO / FLASH

SPACER

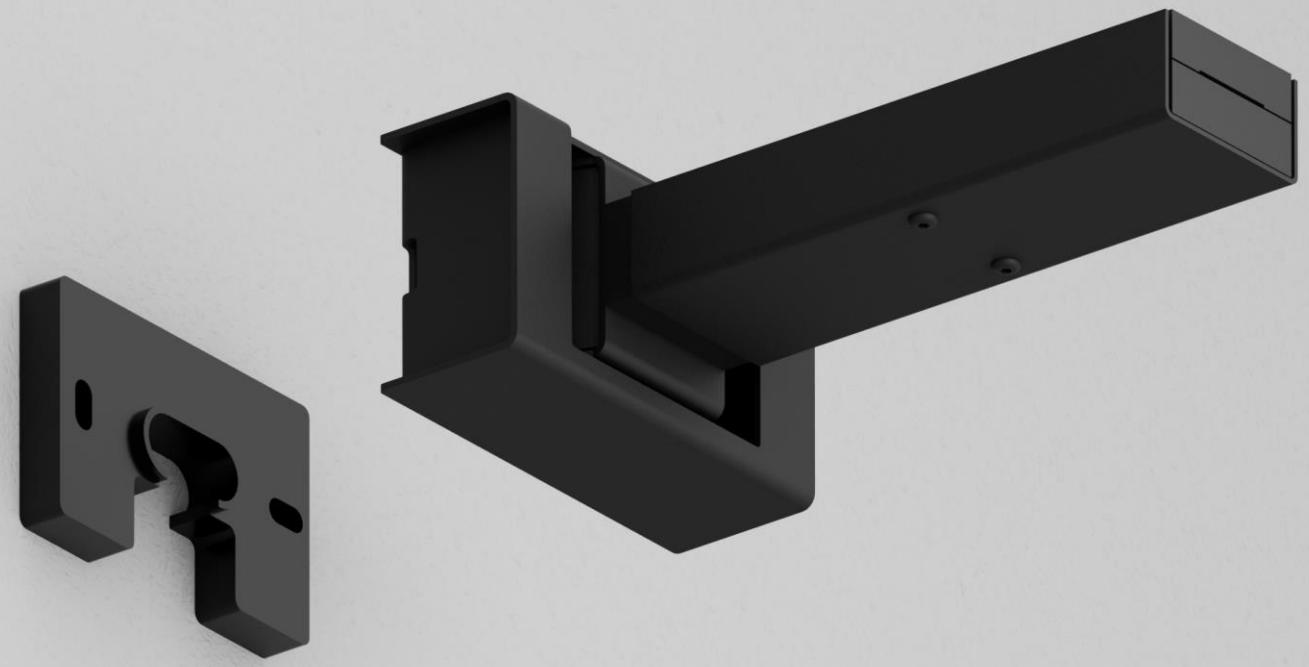

# INFINITO / FLASH

SPACER

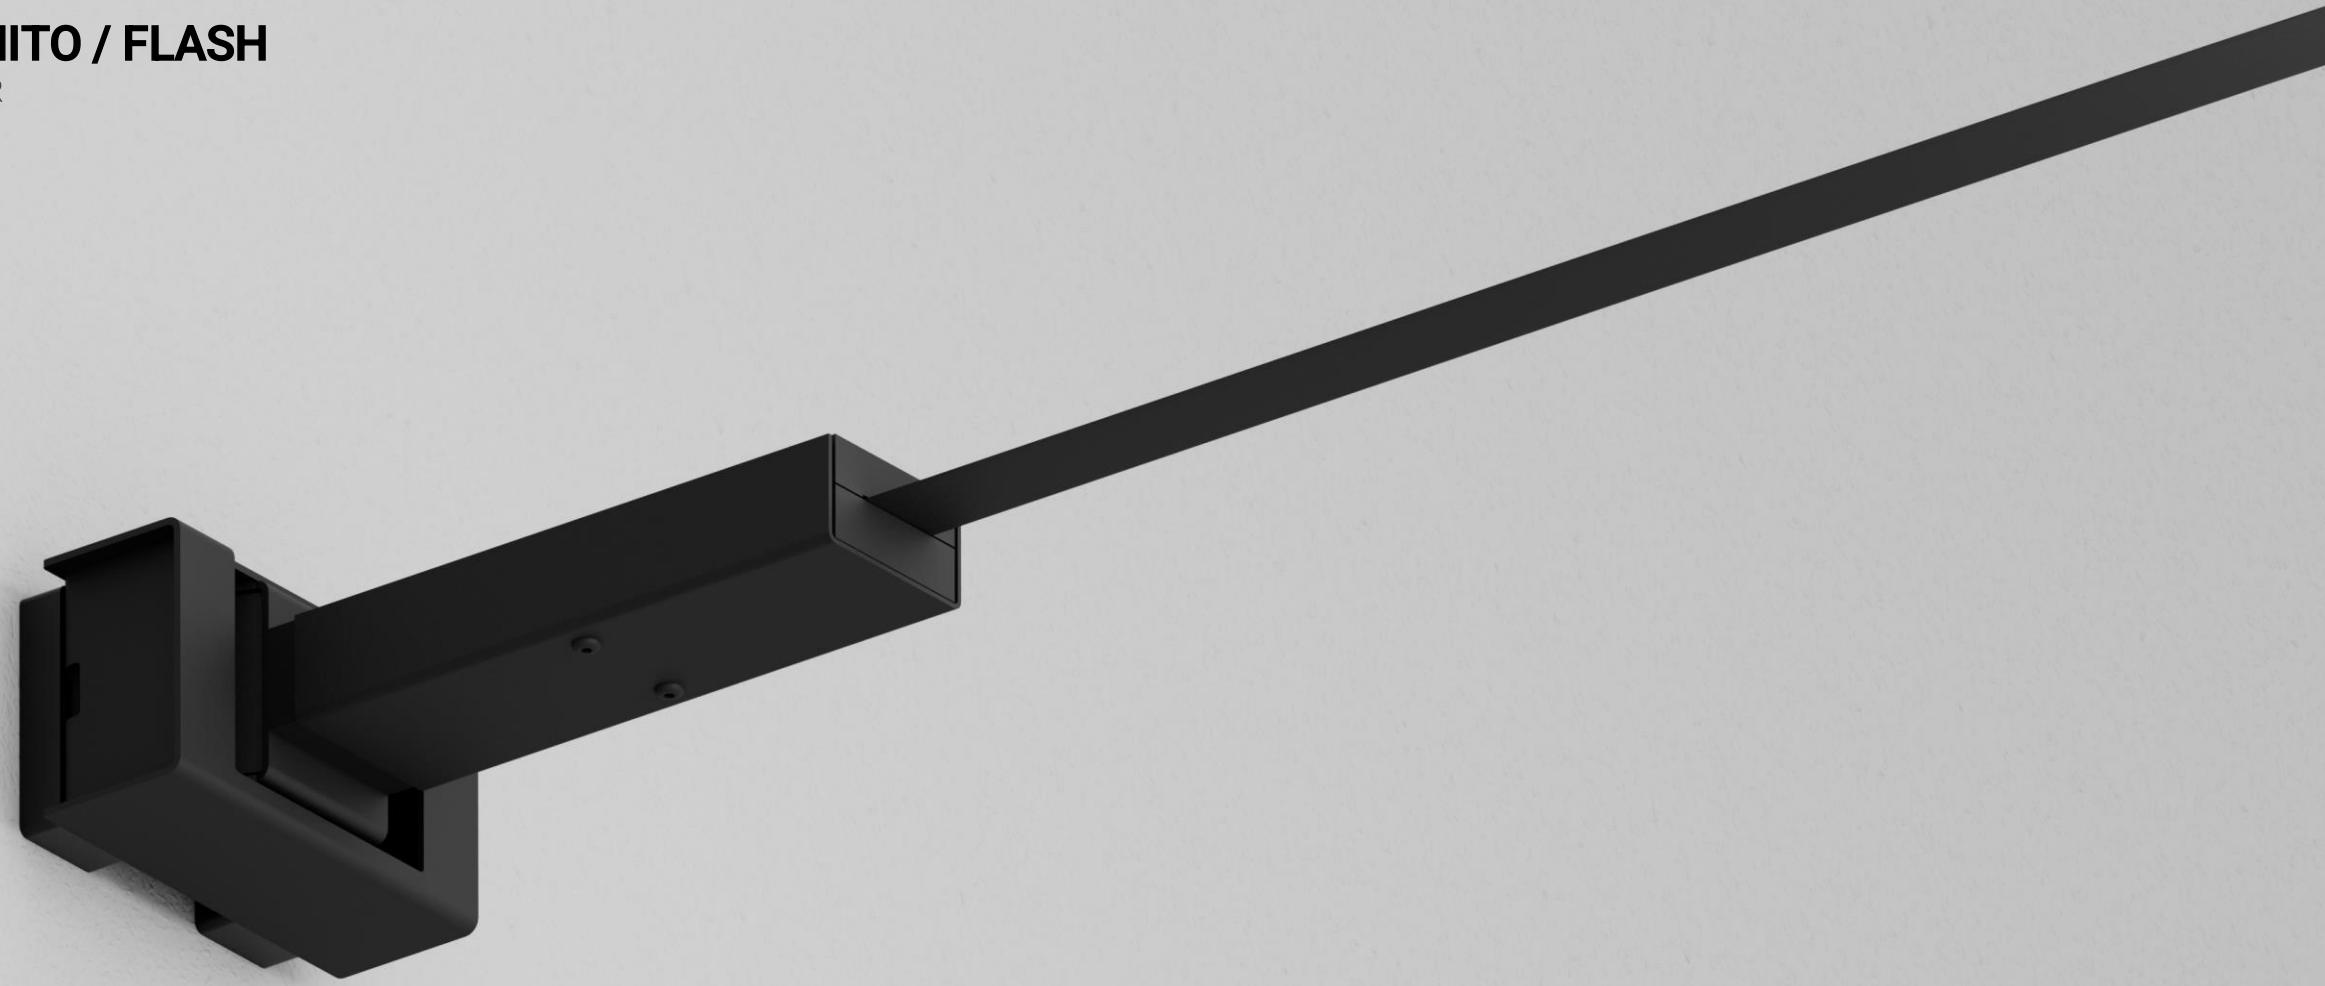

# INFINITO / FLASH

SPACER - WIRE FOR CONNECTION TO DRIVER WITH PLUG

# INFINITO / FLASH

ACCESSORIES

CEILING INSTALLATION KIT

SWALLOW

SPACER

KIT WALL CONNECTION SLOPED 75° (RIGHT / LEFT)

KIT WALL CONNECTION VERTICAL SLOPED 45°

# INFINITO / FLASH

KIT WALL CONNECTION VERTICAL SLOPED UP TO 45°

# INFINITO / FLASH

KIT WALL CONNECTION VERTICAL SLOPED UP TO 45°

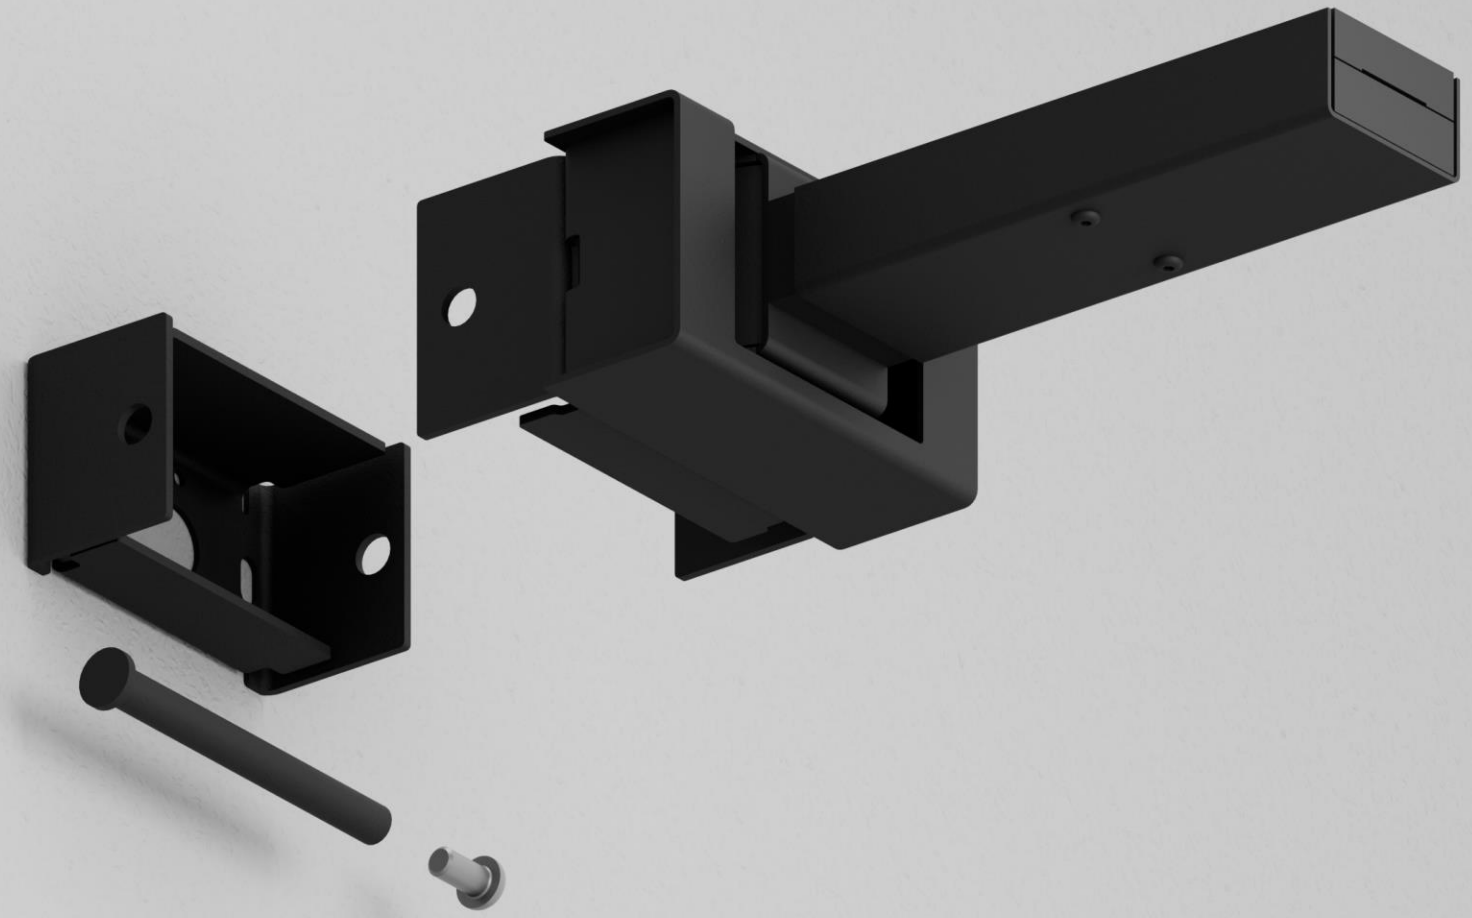

# INFINITO / FLASH

KIT WALL CONNECTION VERTICAL SLOPED UP TO 45°

# INFINITO / FLASH

KIT WALL CONNECTION VERTICAL SLOPED UP TO 45°

# INFINITO / FLASH

KIT WALL CONNECTION VERTICAL SLOPED UP TO 45°

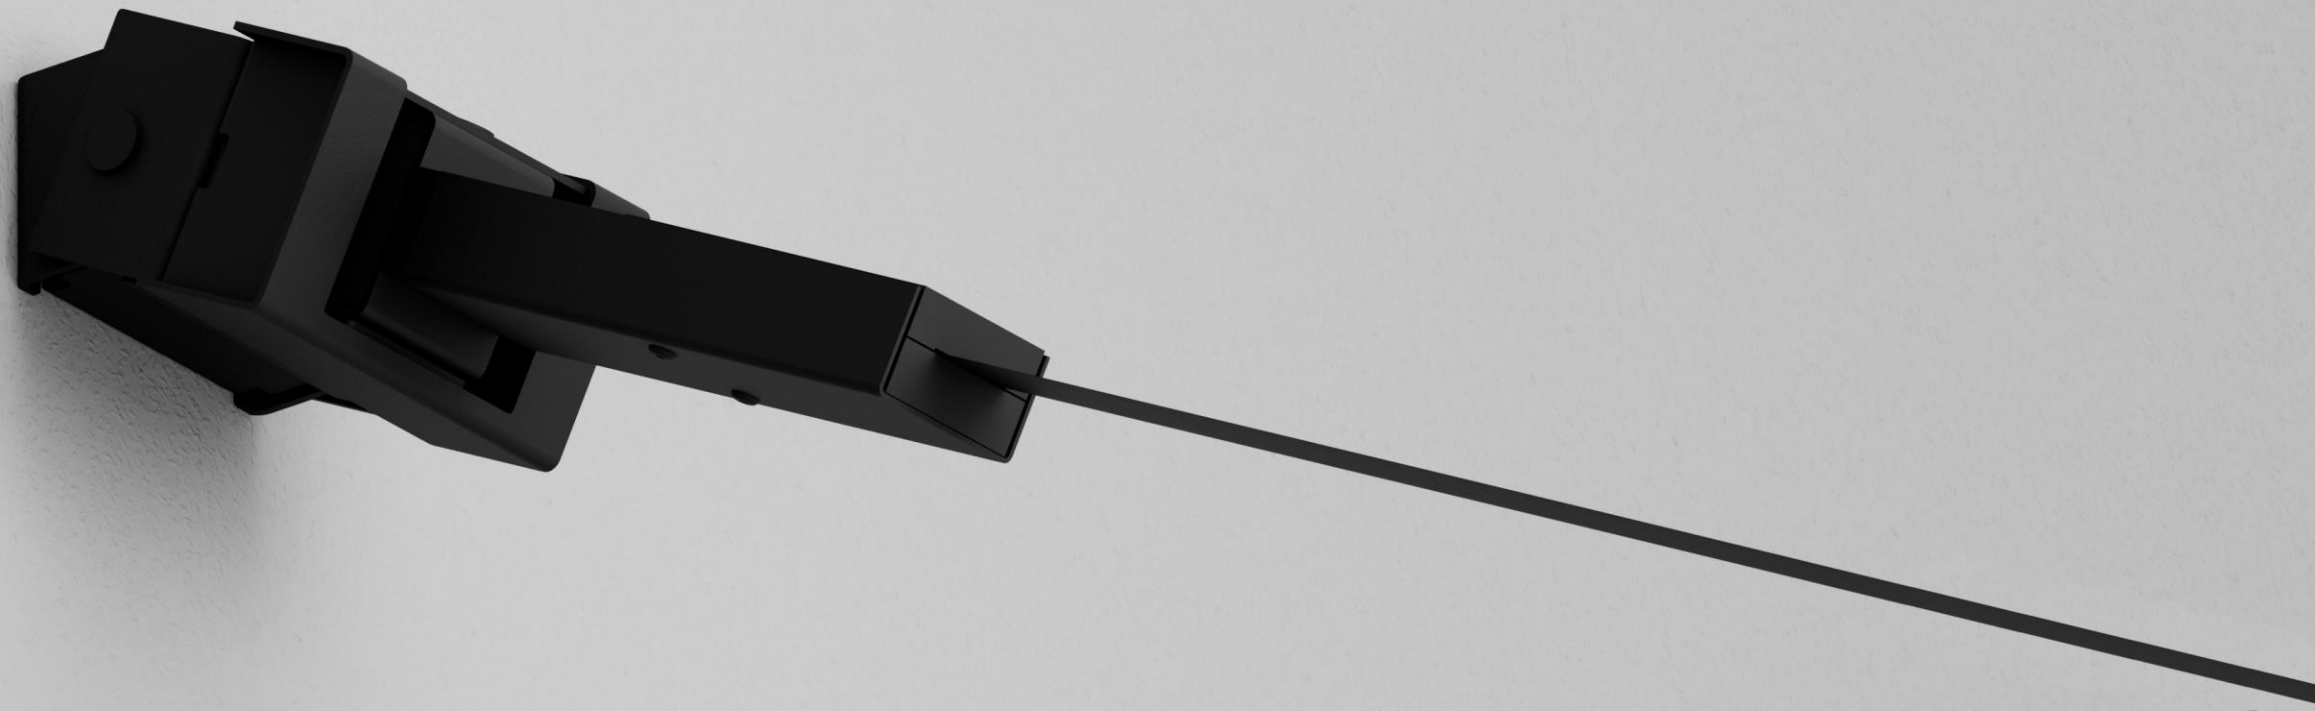

# INFINITO / FLASH

ACCESSORIES

CEILING INSTALLATION KIT

SWALLOW

SPACER

KIT WALL CONNECTION SLOPED 75° (RIGHT / LEFT)

KIT WALL CONNECTION VERTICAL SLOPED 45°

# INFINITO / FLASH

KIT WALL CONNECTION SLOPED UP TO 75° (RIGHT / LEFT)

# INFINITO / FLASH

KIT WALL CONNECTION SLOPED UP TO 75° (RIGHT / LEFT)

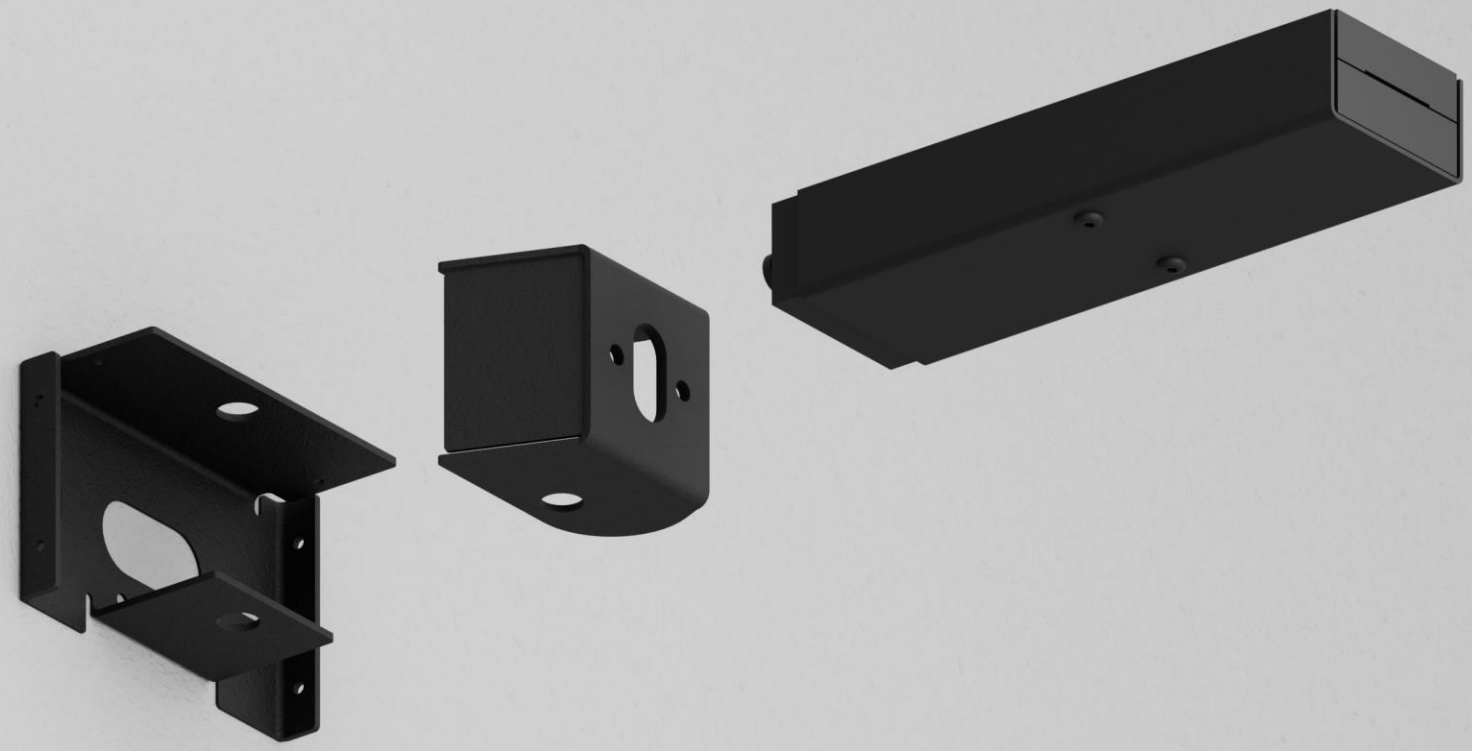

# INFINITO / FLASH

KIT WALL CONNECTION SLOPED UP TO 75° (RIGHT / LEFT)

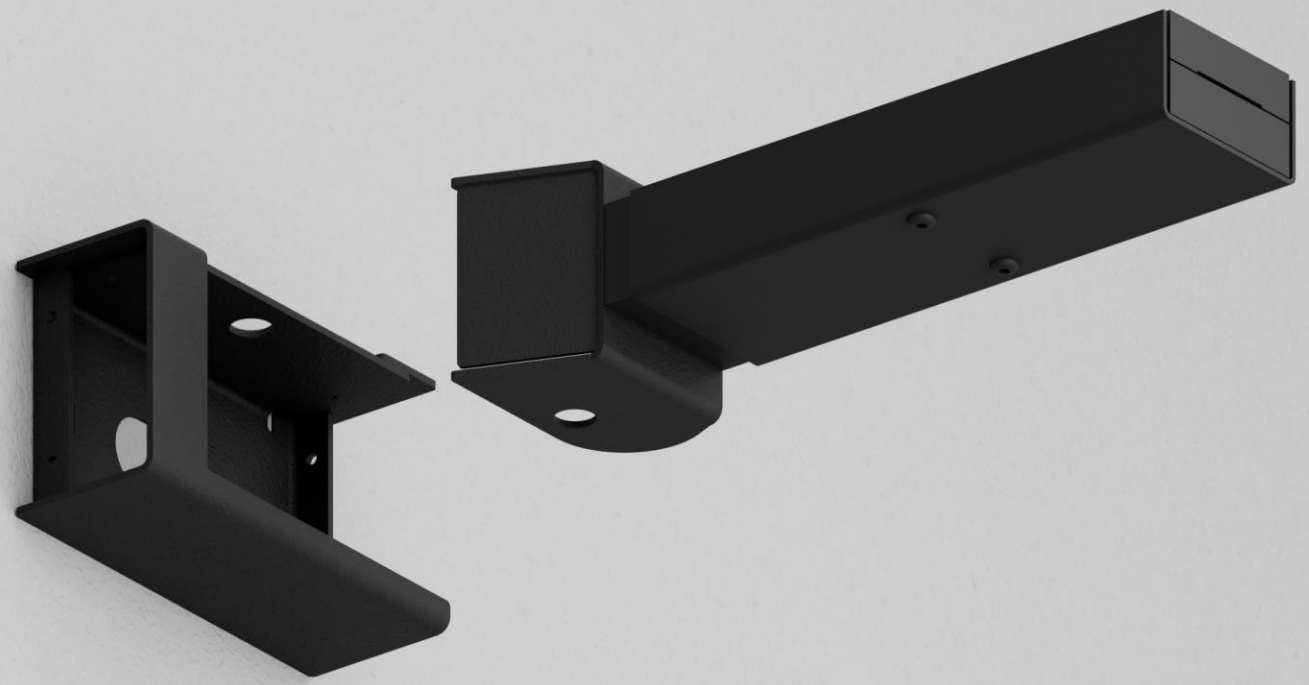

# INFINITO / FLASH

KIT WALL CONNECTION SLOPED UP TO 75° (RIGHT / LEFT)

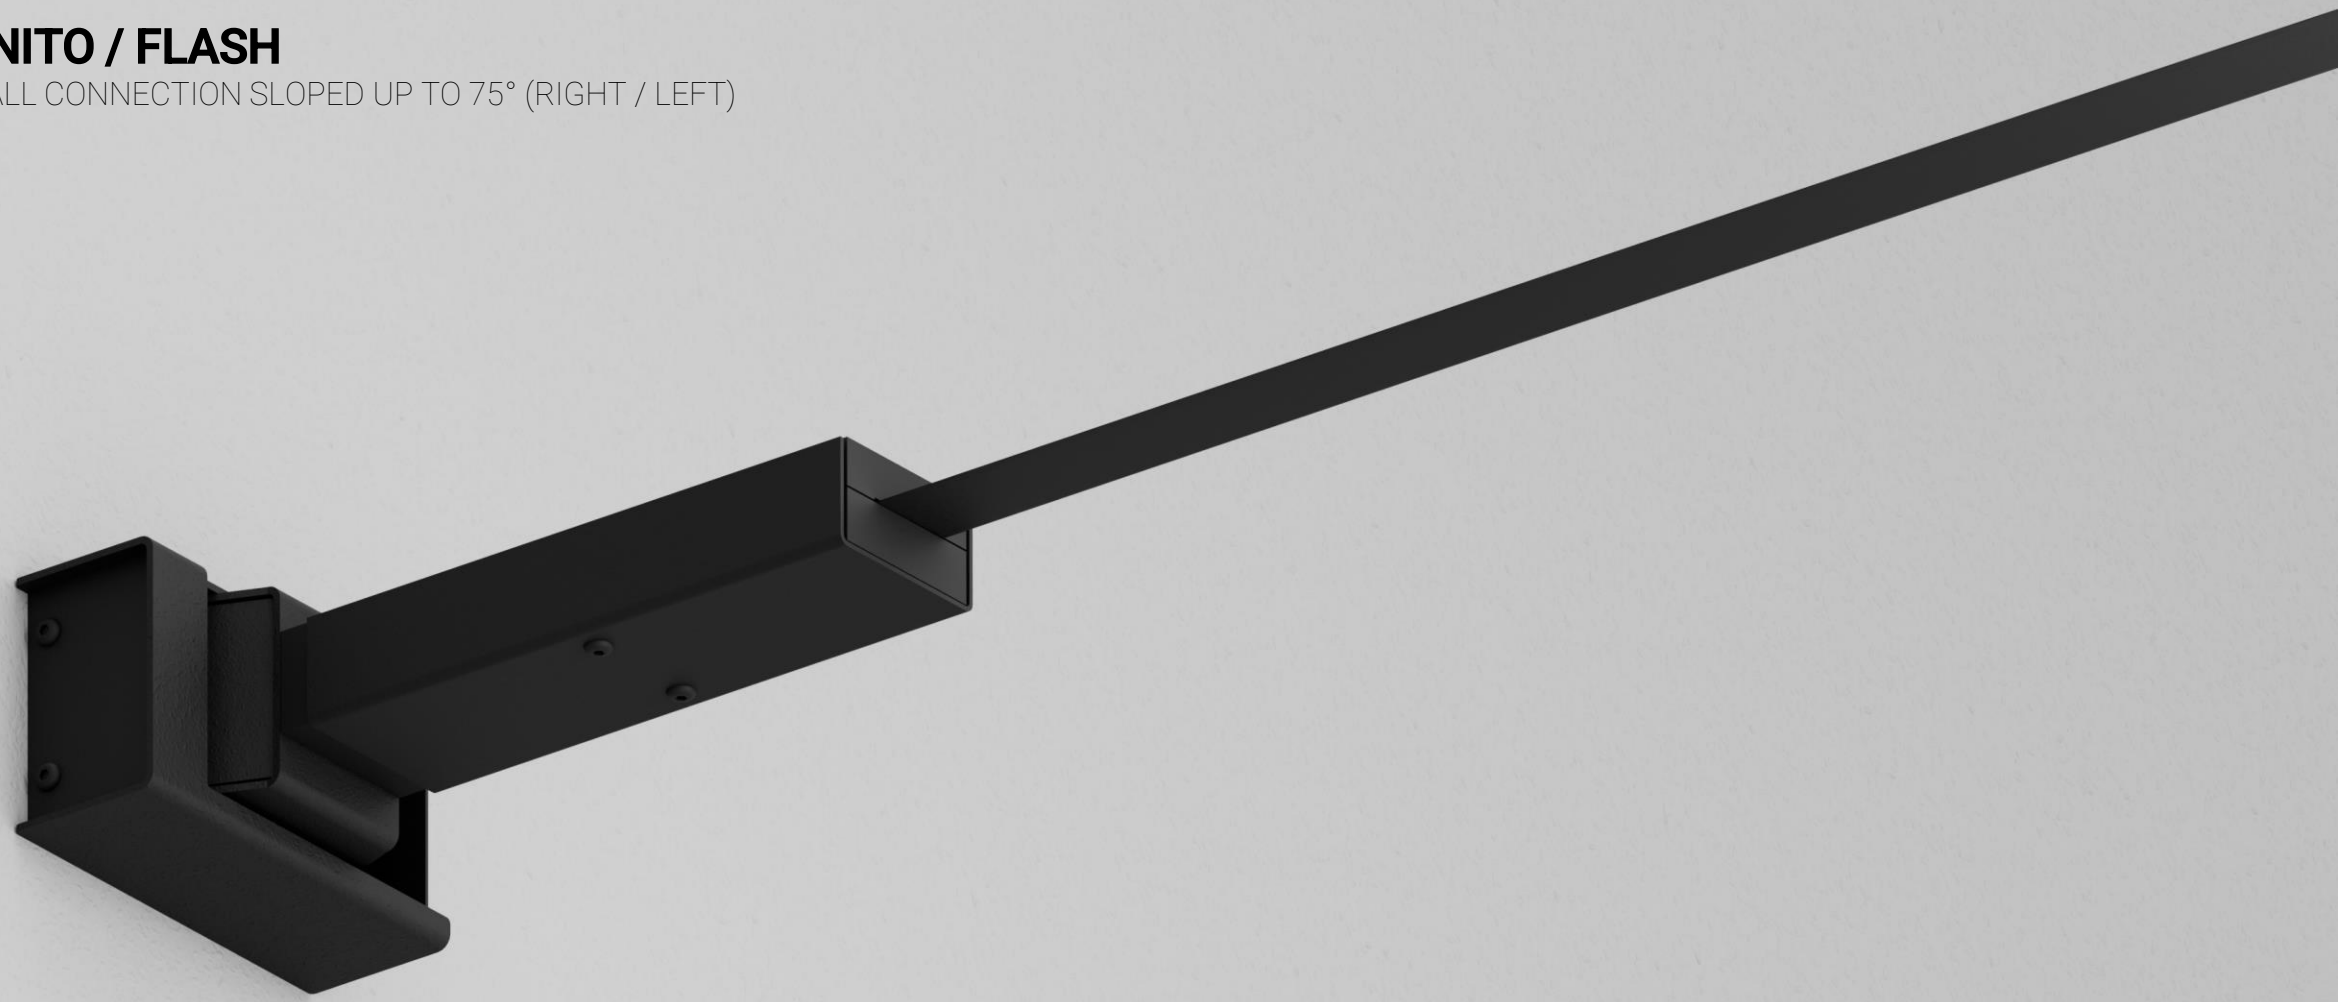

# INFINITO / FLASH

KIT WALL CONNECTION SLOPED UP TO 75° (RIGHT / LEFT)

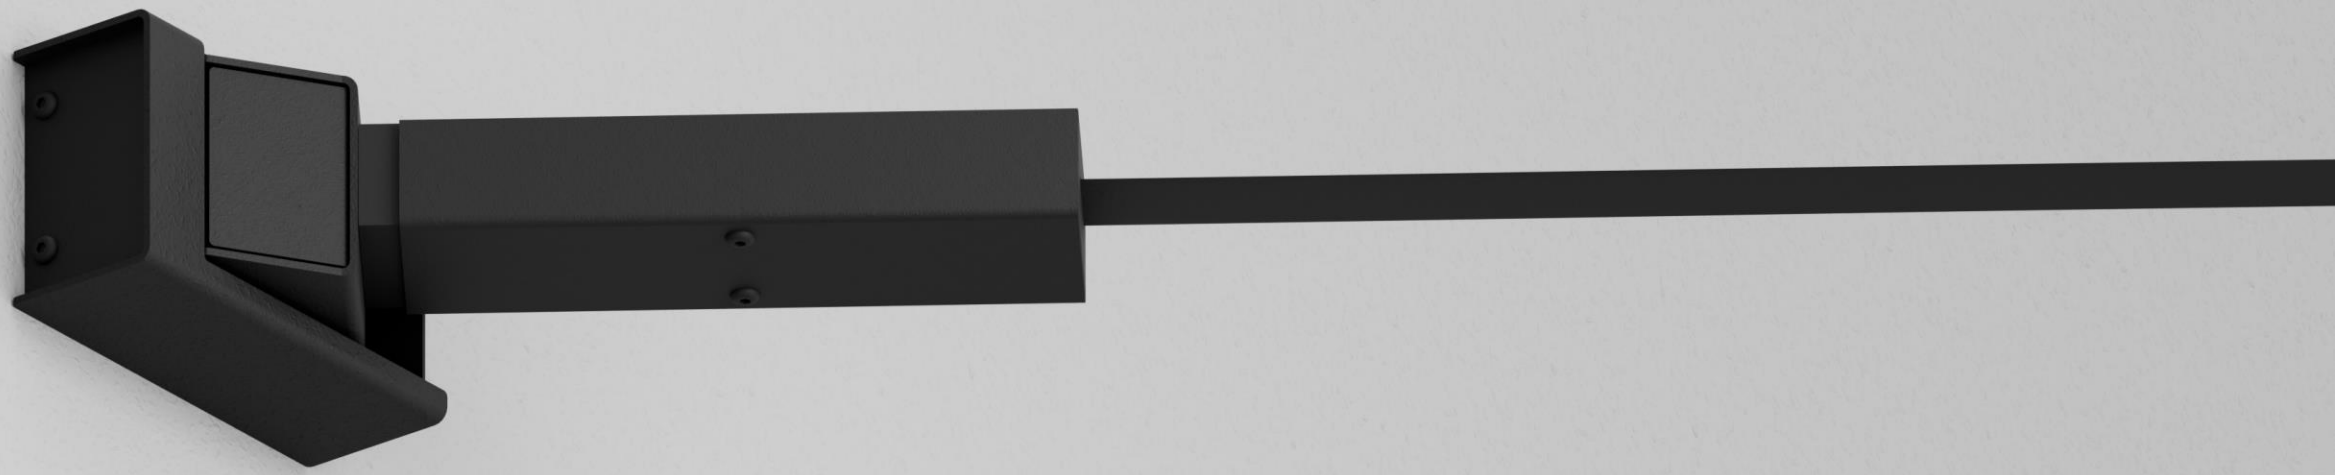

# INFINITO / FLASH

ACCESSORIES

CEILING INSTALLATION KIT

SWALLOW

SPACER

KIT WALL CONNECTION SLOPED 75° (RIGHT / LEFT)

KIT WALL CONNECTION VERTICAL SLOPED 45°

# INFINITO / FLASH

CEILING INSTALLATION KIT

# INFINITO / FLASH

CEILING INSTALLATION KIT

# INFINITO / FLASH

CEILING INSTALLATION KIT

# INFINITO / FLASH

CEILING INSTALLATION KIT

# INFINITO / FLASH

ACCESSORIES

CEILING INSTALLATION KIT

SWALLOW

SPACER

KIT WALL CONNECTION SLOPED 75° (RIGHT / LEFT)

KIT WALL CONNECTION VERTICAL SLOPED 45°

# INFINITO / FLASH

SWALLOW

# INFINITO / FLASH

3000K – 2700K – TUNABLE WHITE

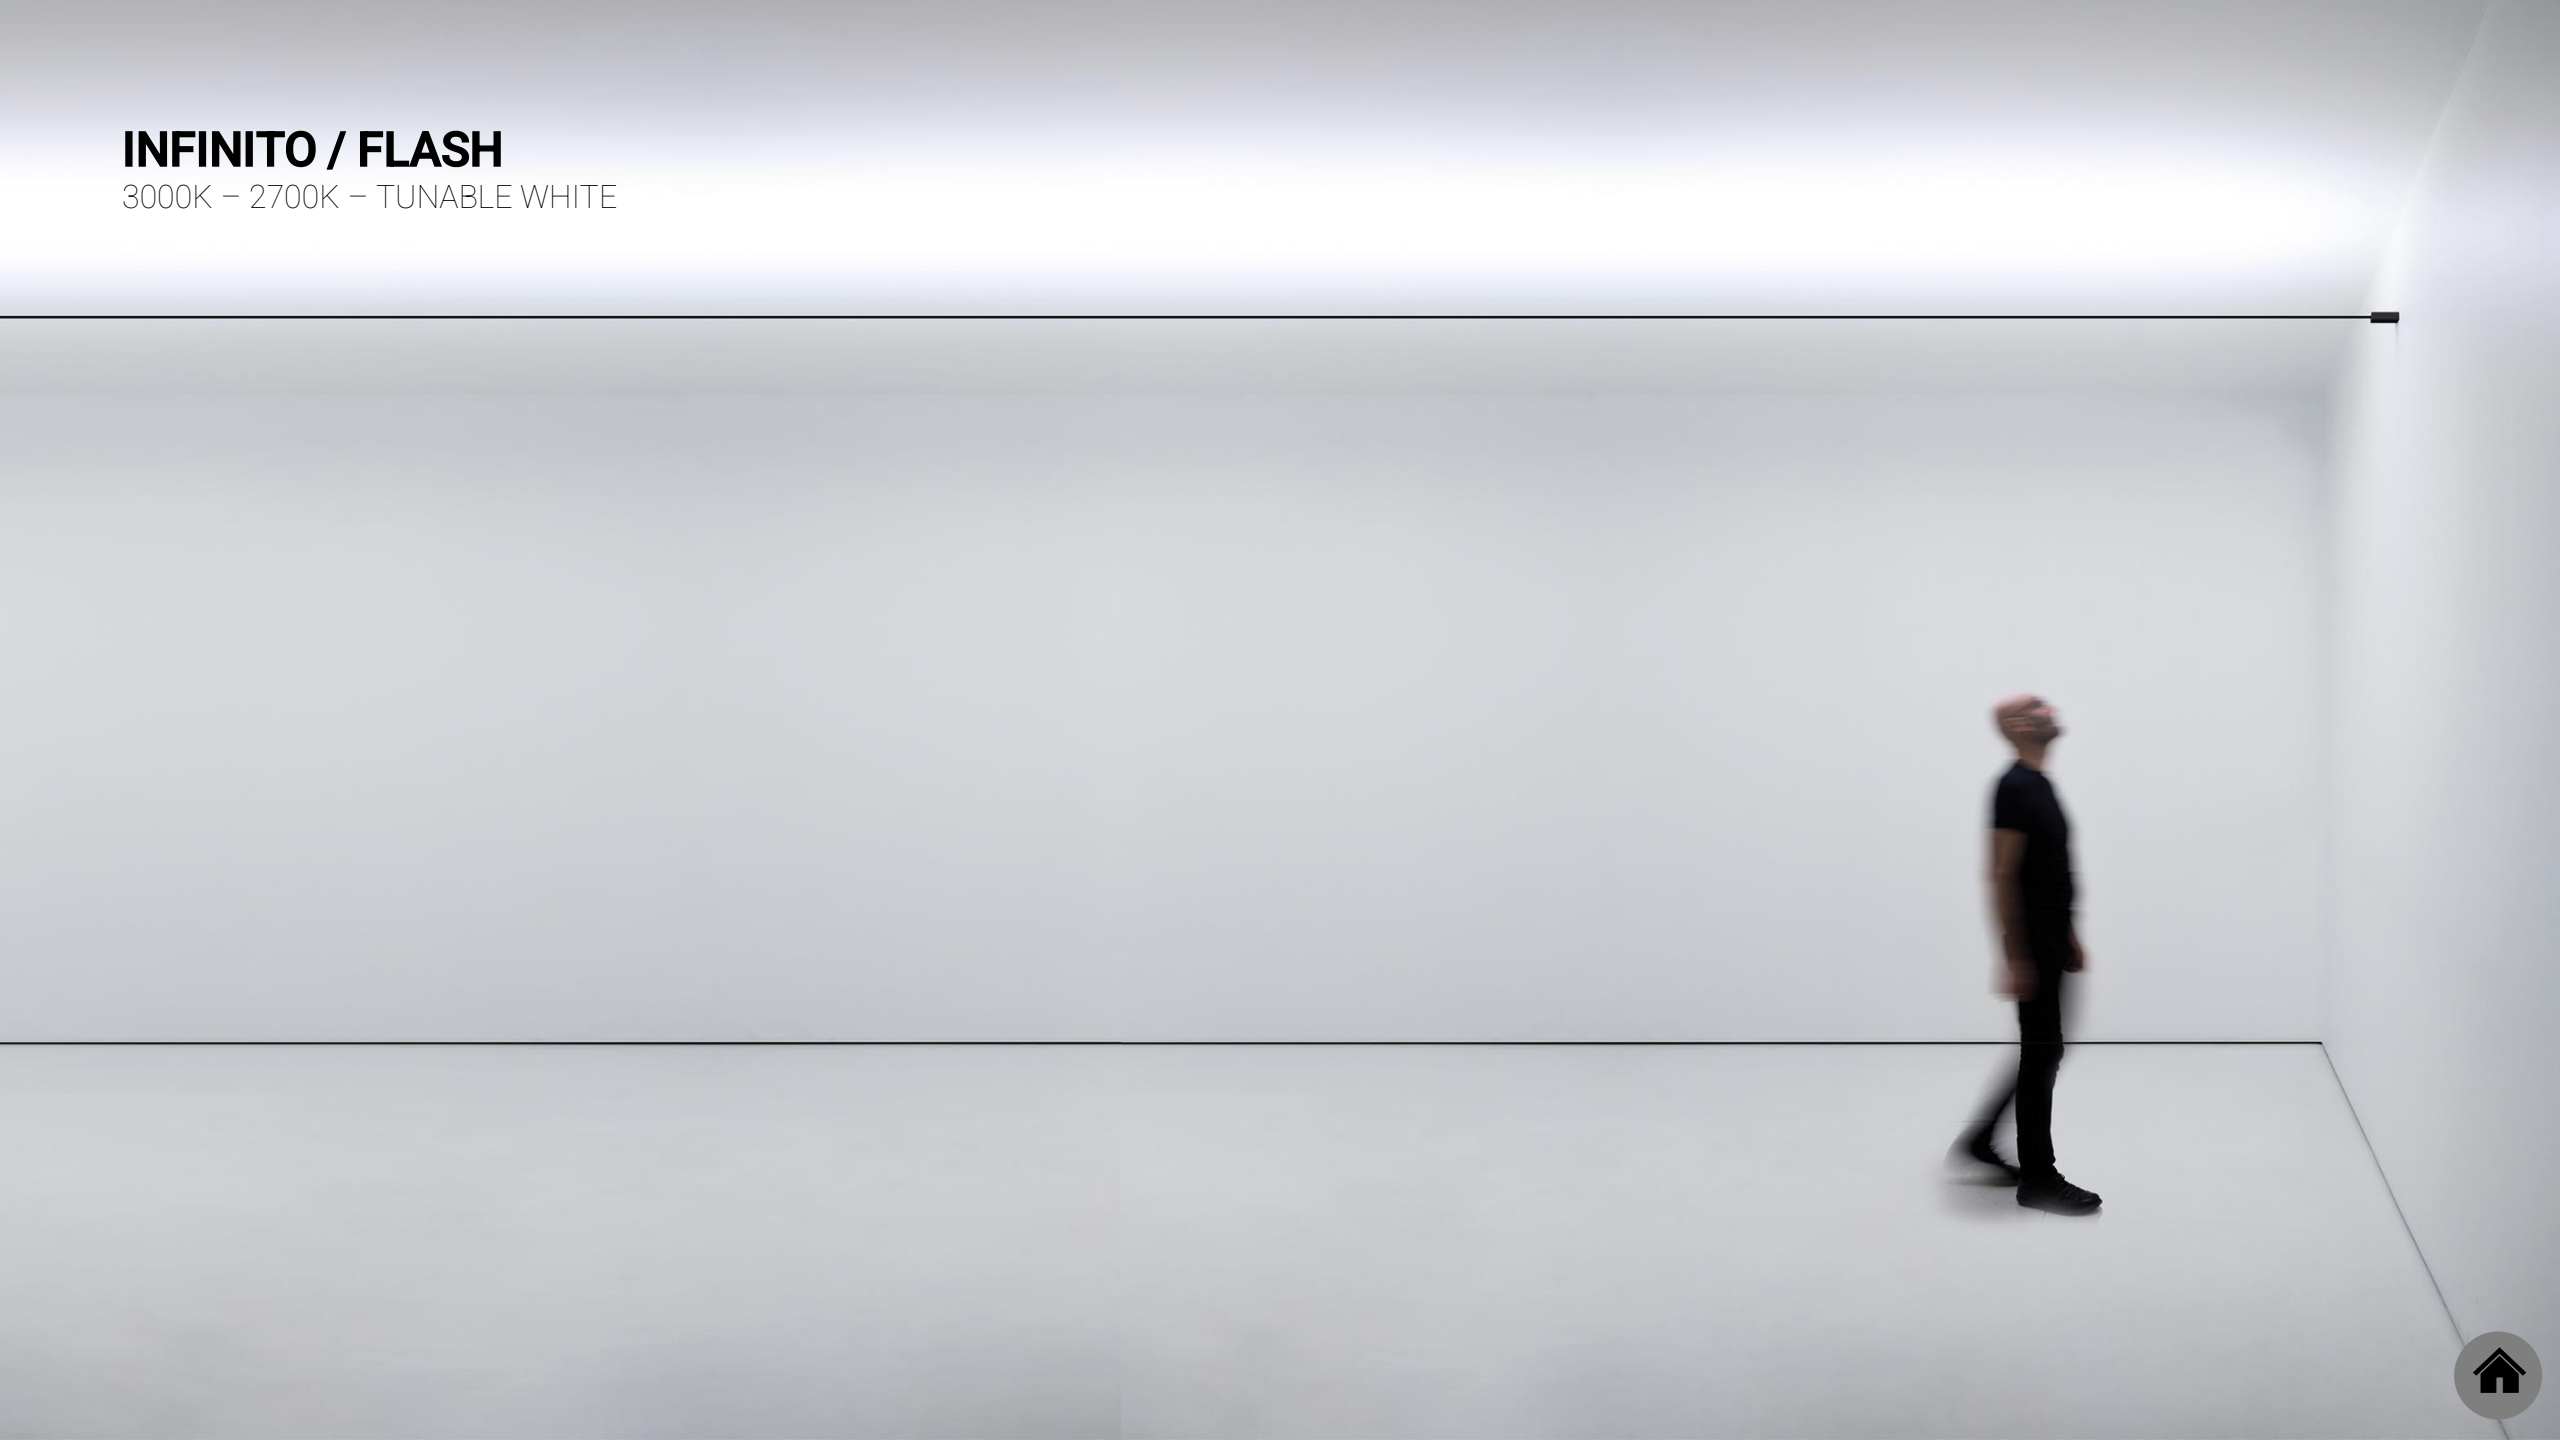

# INFINITO / FLASH

3000K – 2700K – TUNABLE WHITE

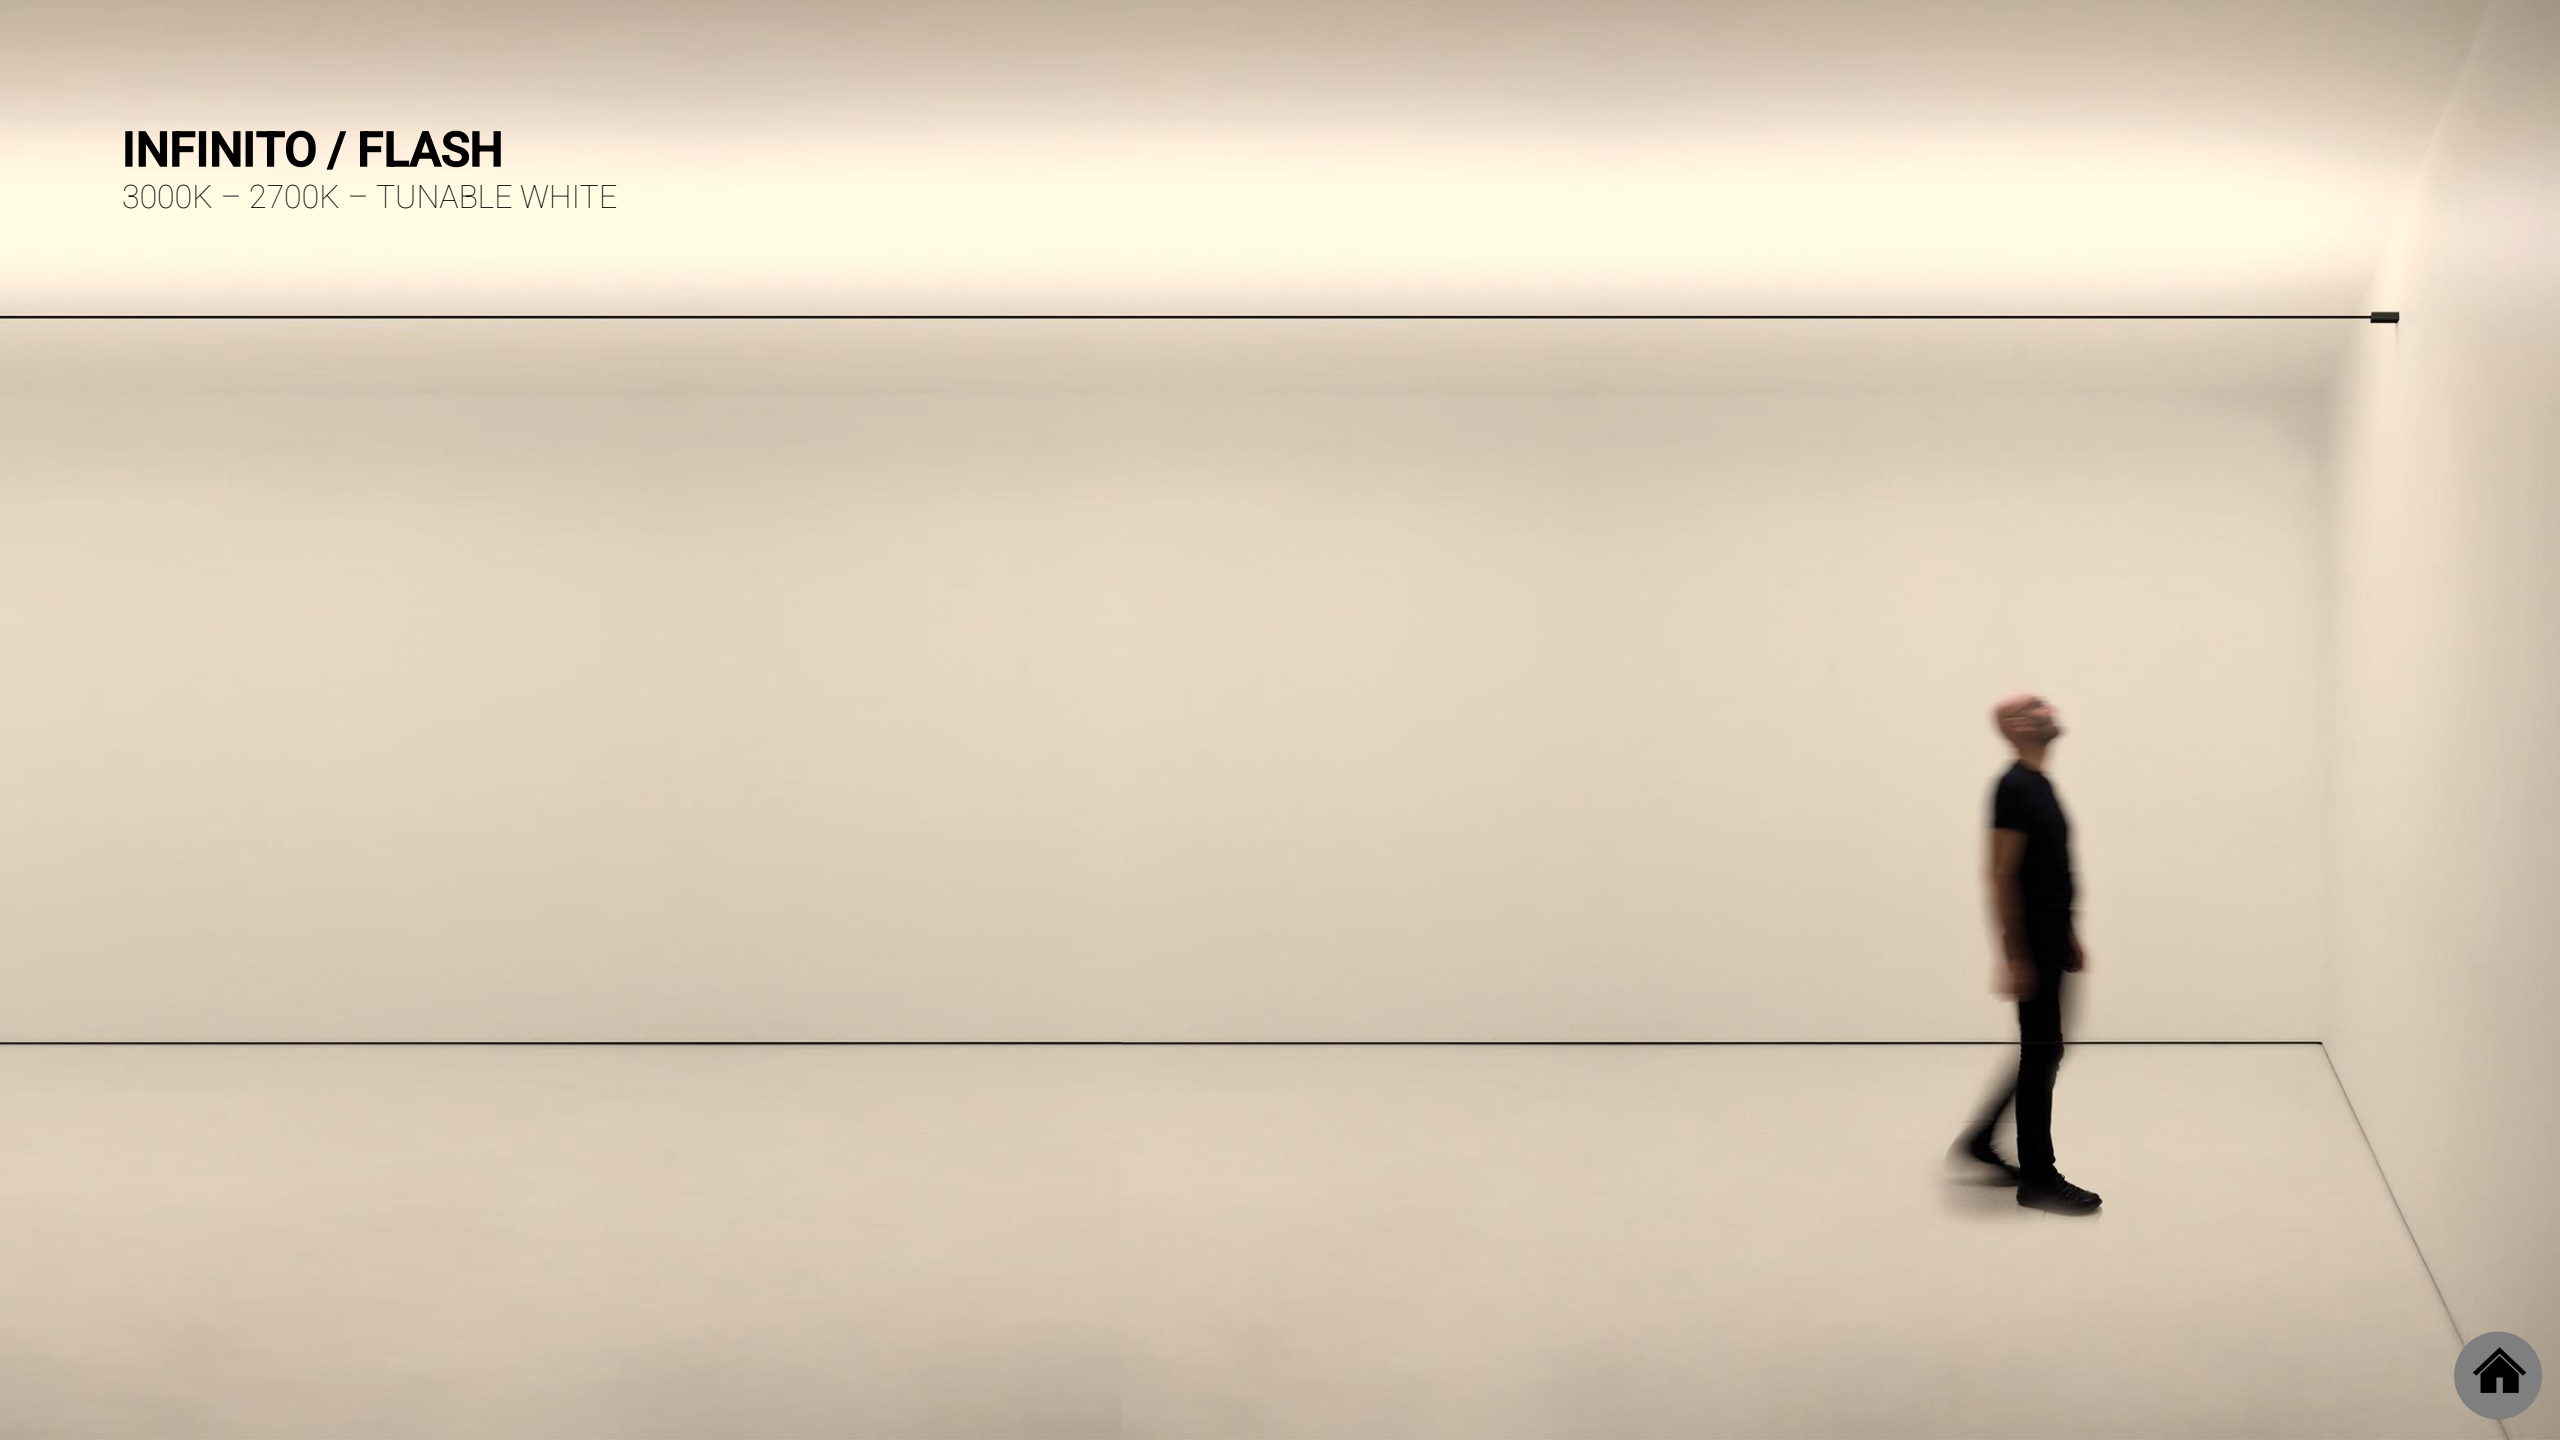

# INFINITO / FLASH

REMOTE DRIVER CONNECTION

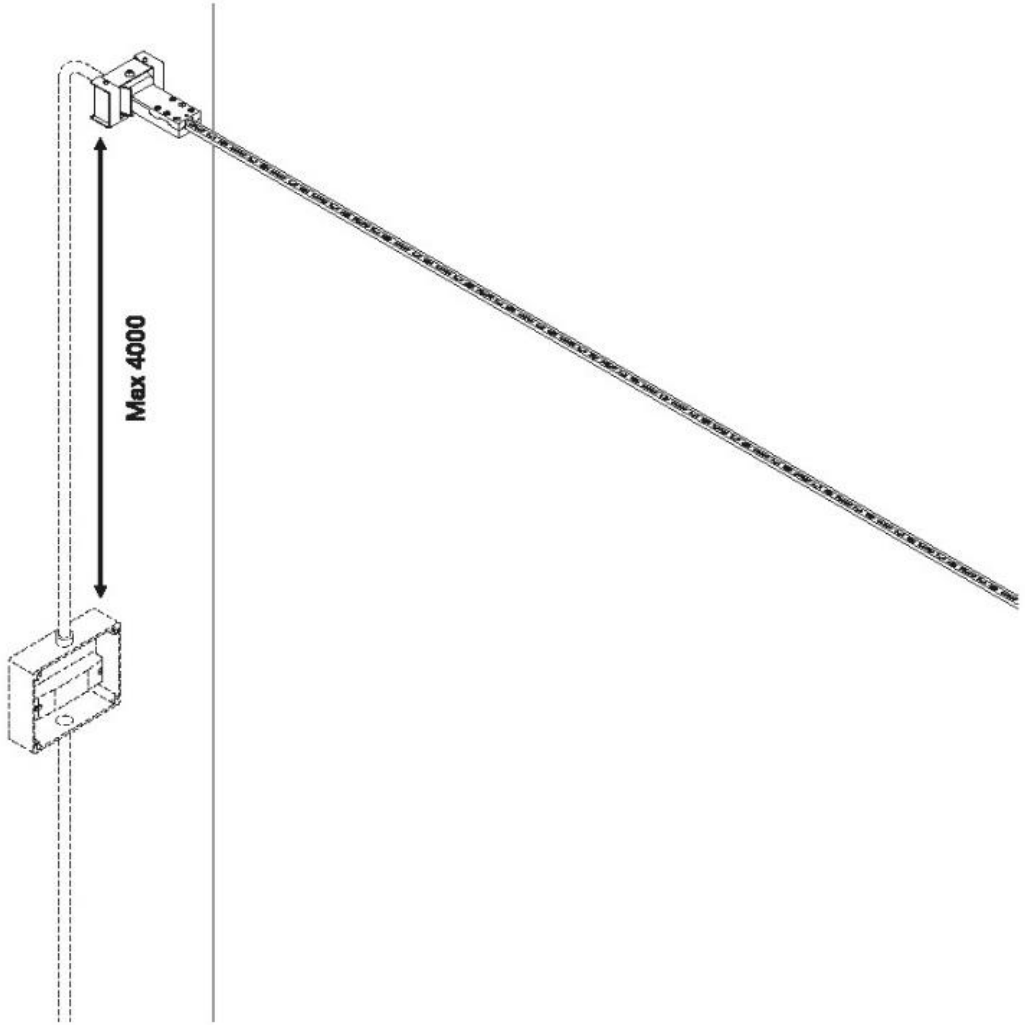


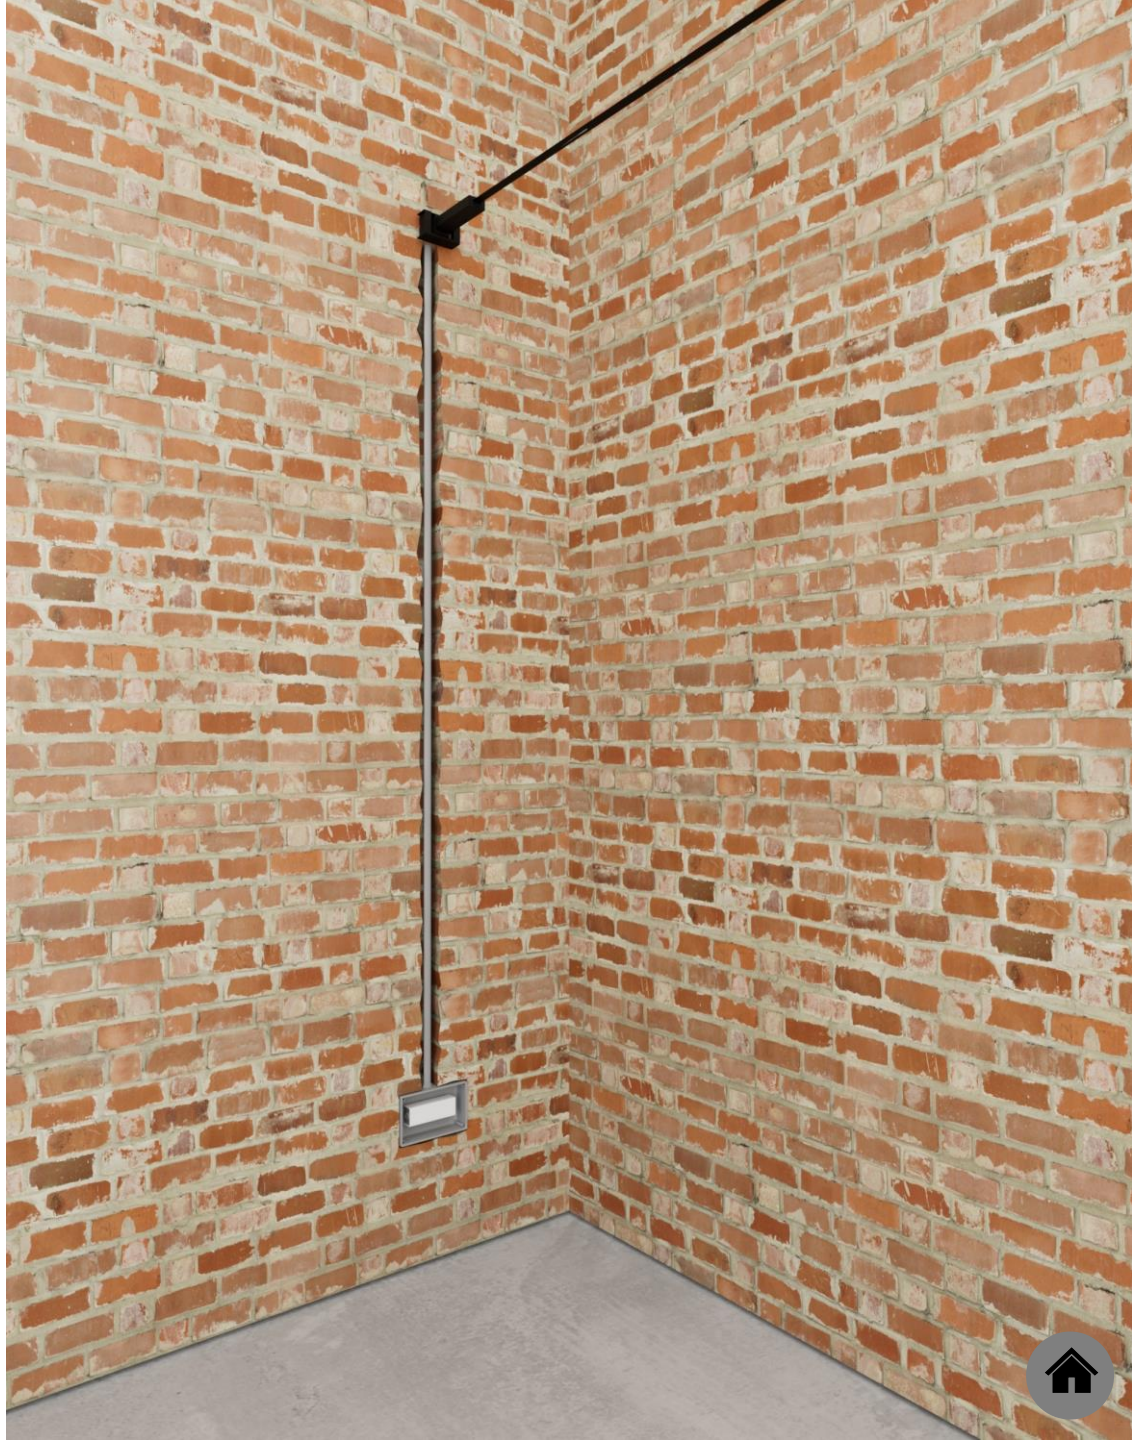

# INFINITO / FLASH

REMOTE DRIVER CONNECTION

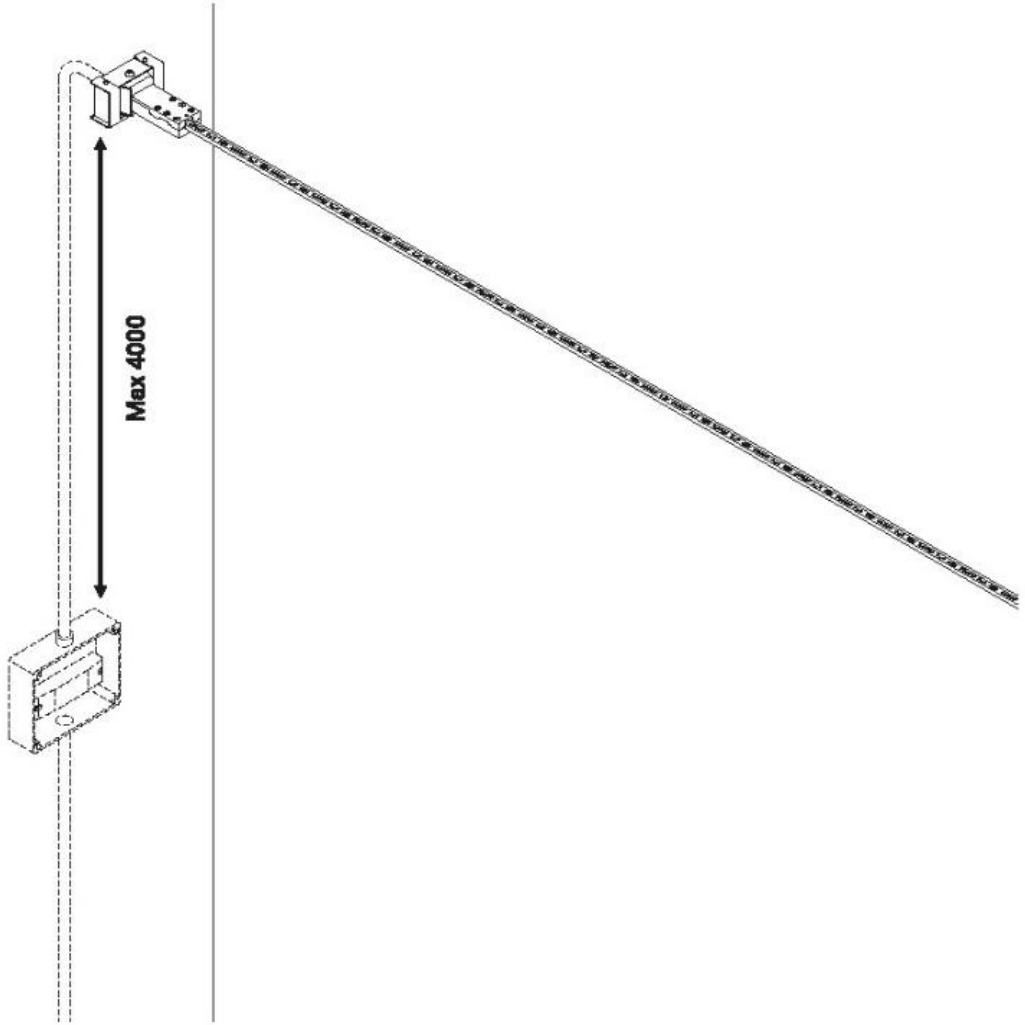

# INFINITO / FLASH

REMOTE DRIVER CONNECTION

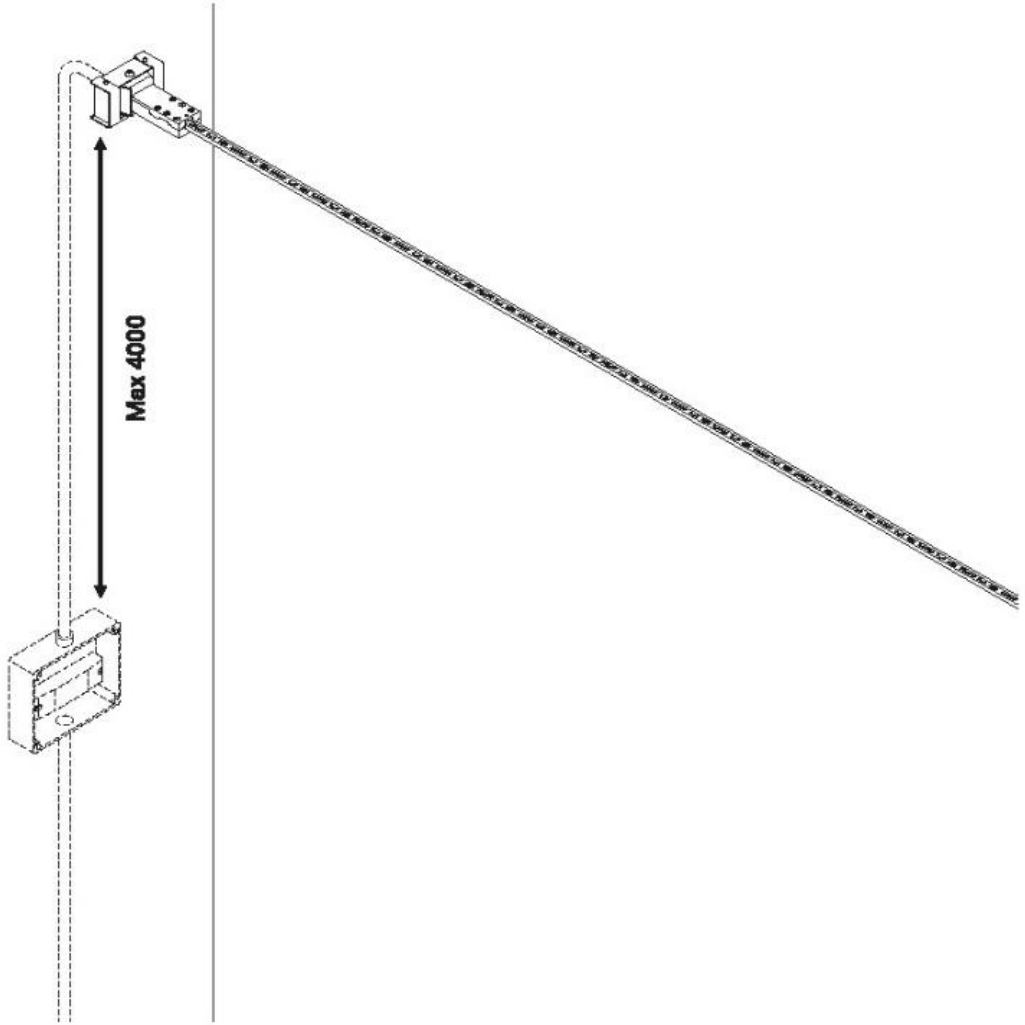


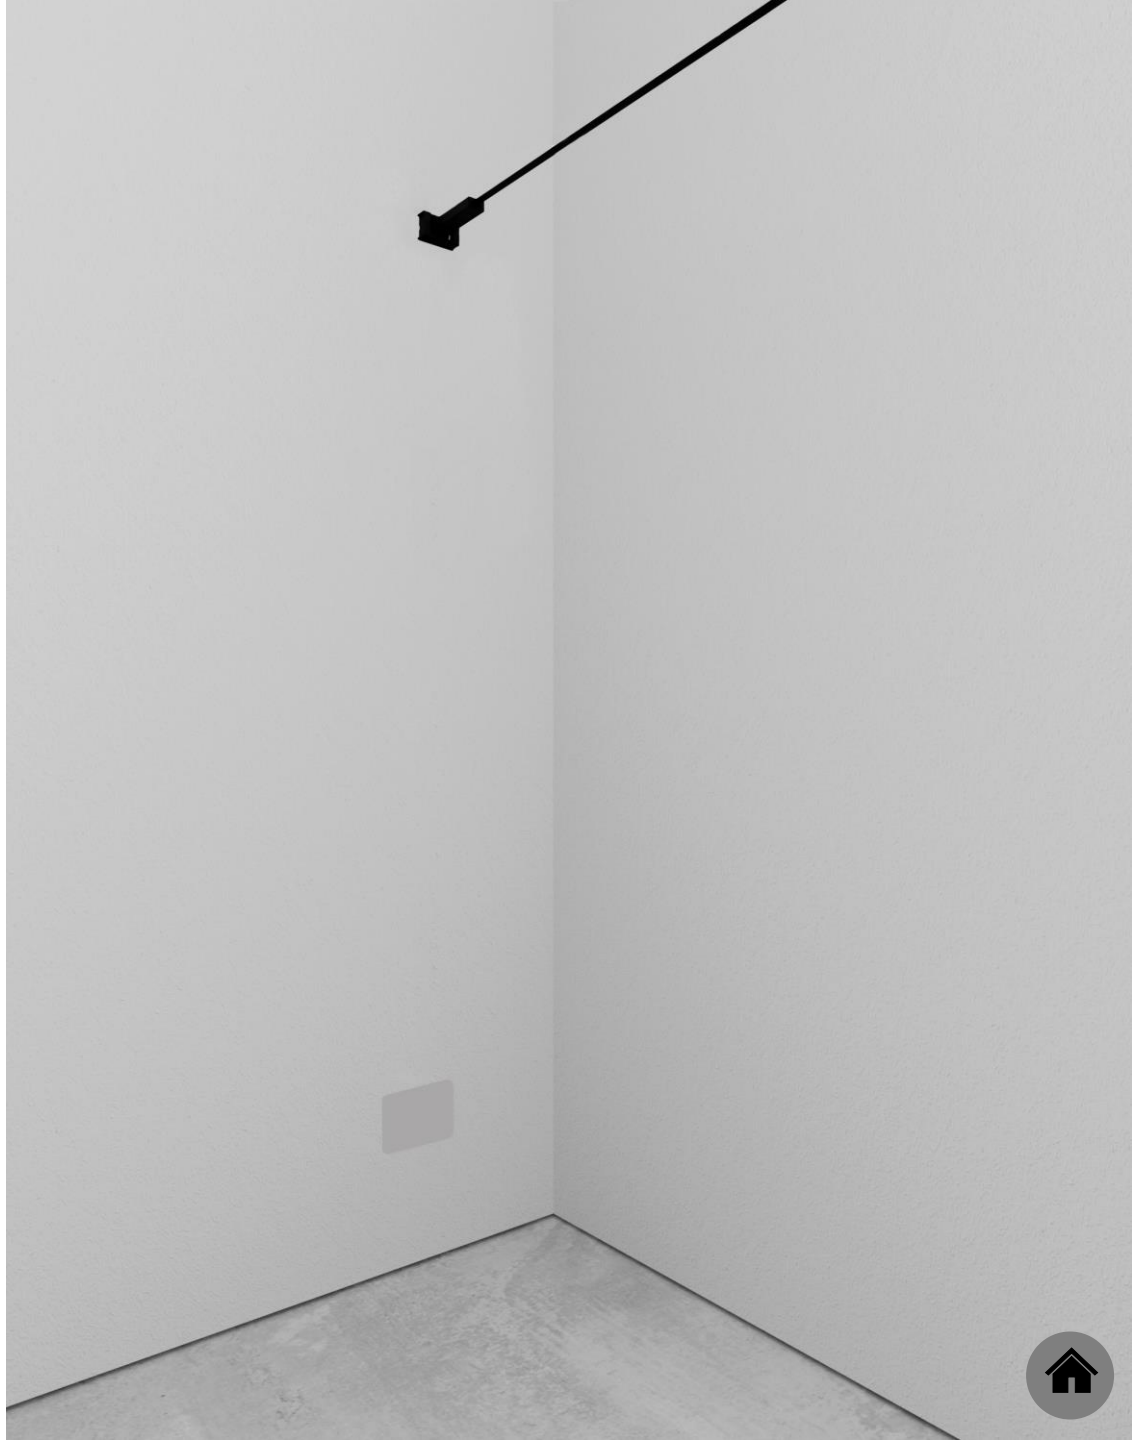

# INFINITO / FLASH

POWER KIT WITH PLUG CONNECTION

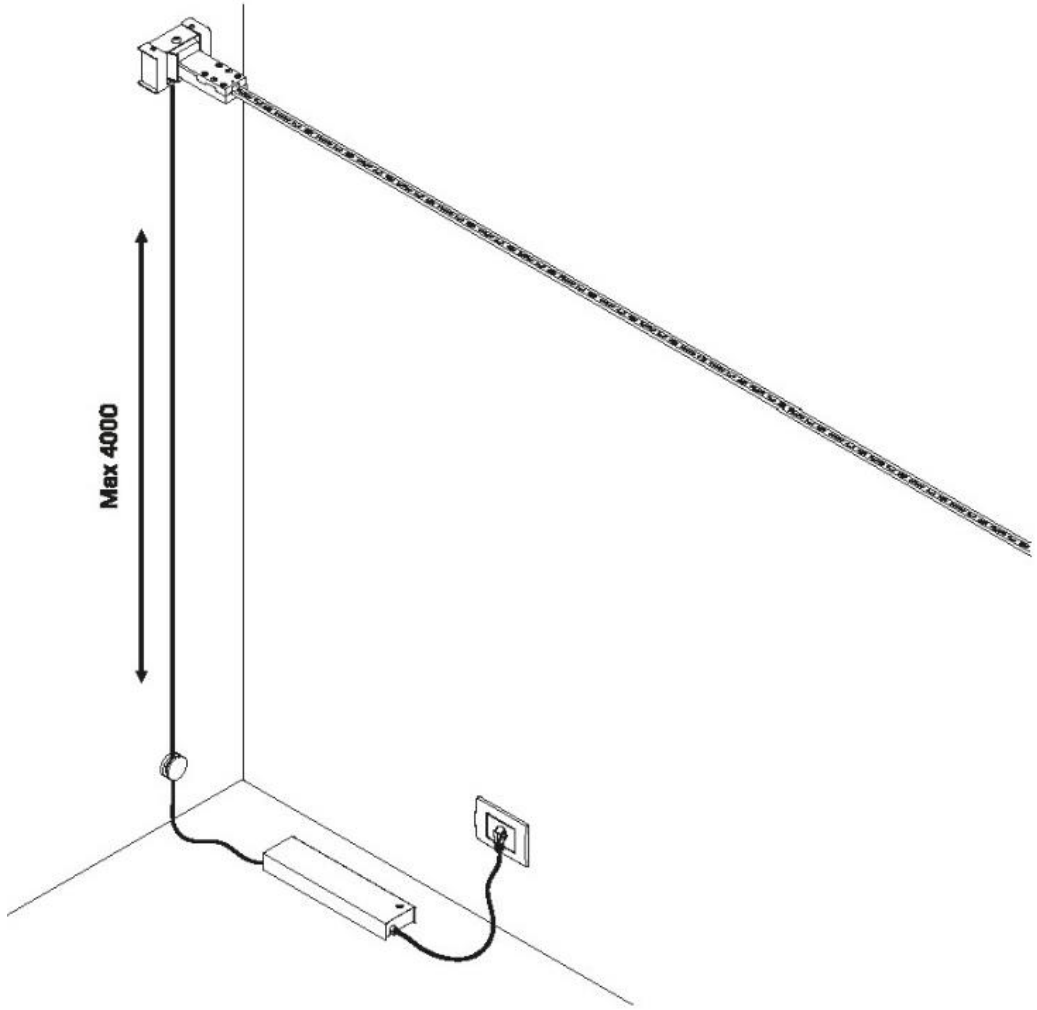

# INFINITO / FLASH

ENDLESS CONNECTION

# INFINITO / FLASH

ENDLESS CONNECTION

# INFINITO / FLASH

ENDLESS CONNECTION - REMOTE DRIVER

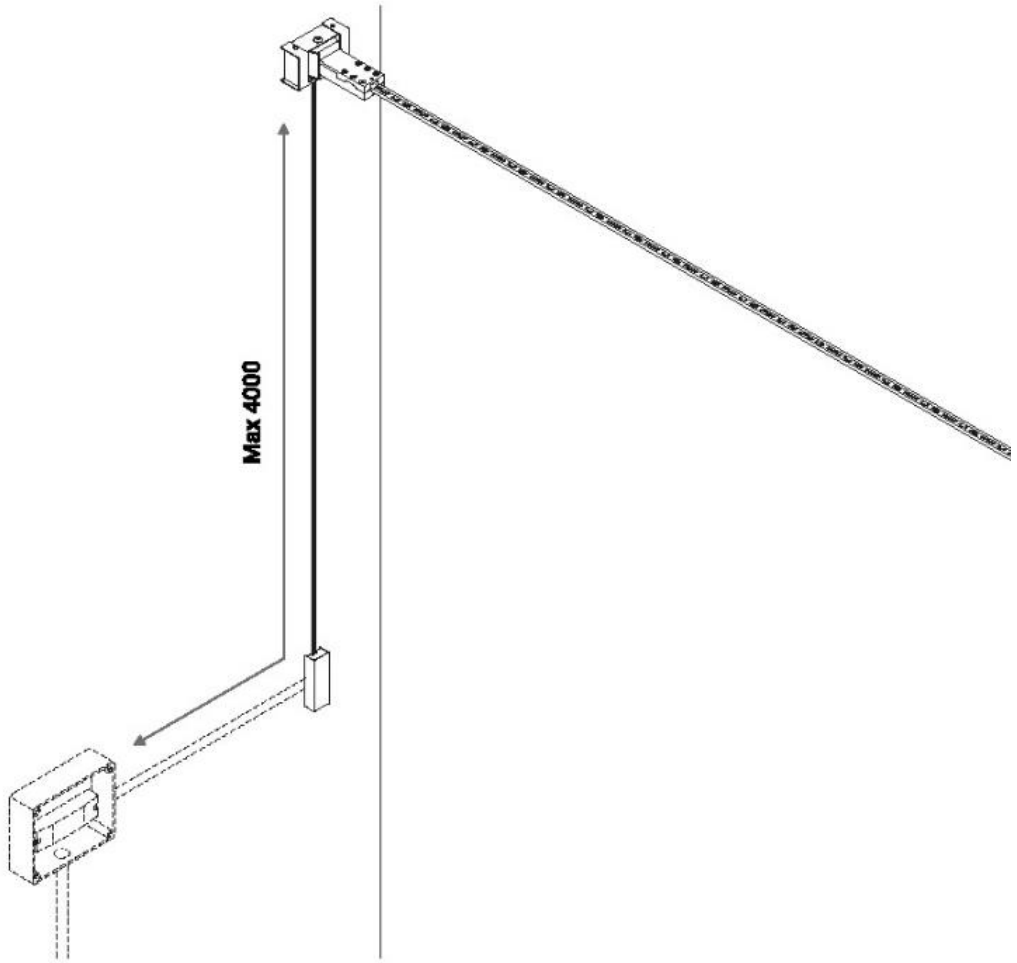

# INFINITO / FLASH

ENDLESS CONNECTION – WALL AND CEILING ROSE

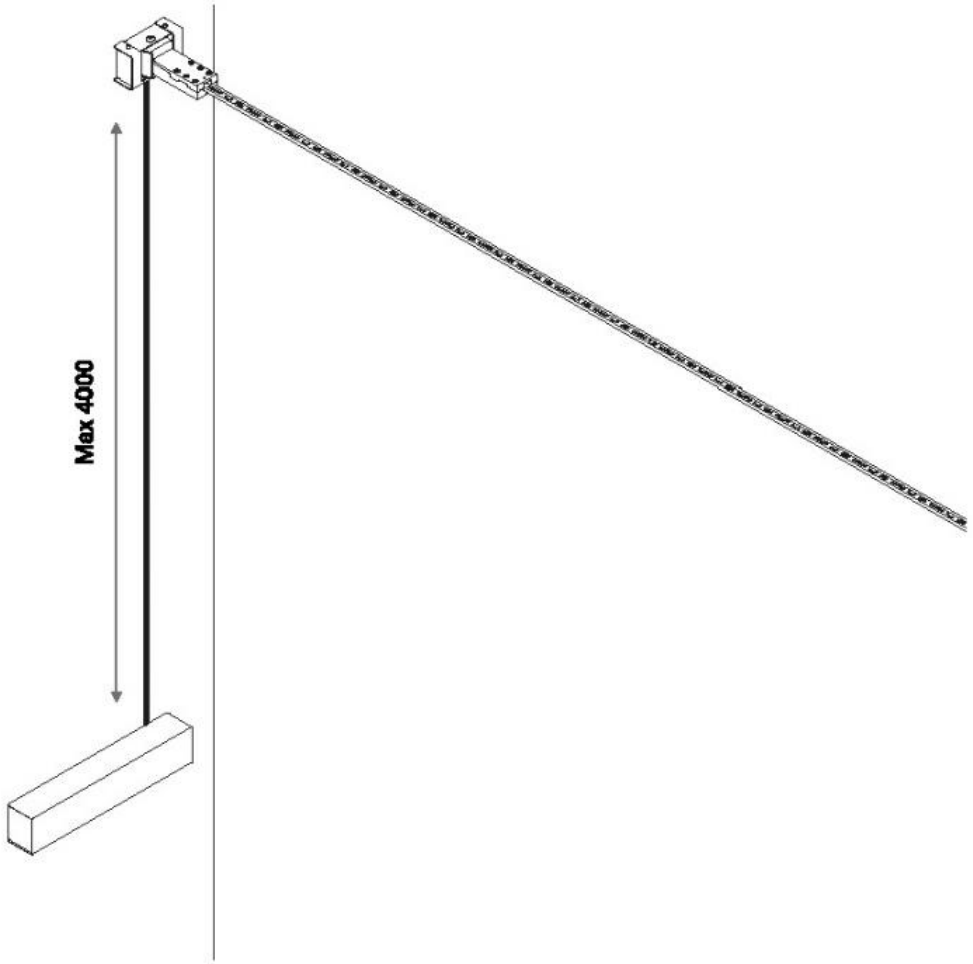

# INFINITO / FLASH

ENDLESS CONNECTION – POWER KIT WITH PLUG

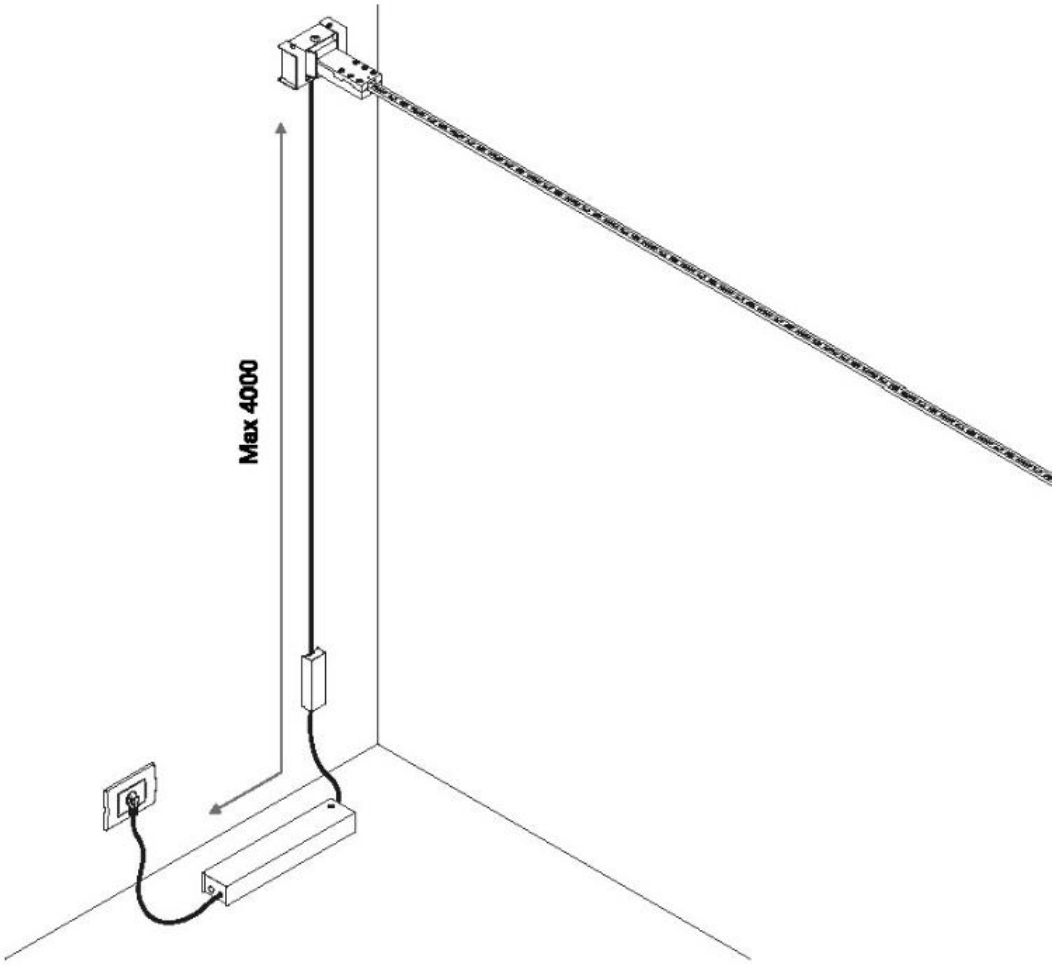

**How to order - INFINITO 6**

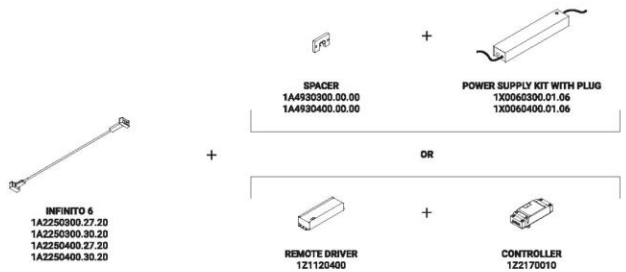


**How to order - INFINITO 12**

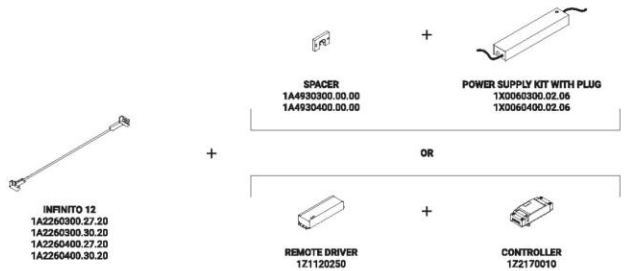


**How to order - INFINITO 18**

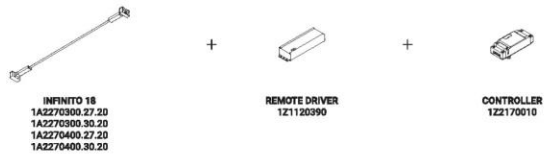






Wall-Systems / Indirect / Indoor

**Material** Metal

**Finish** **.03** Matt White **.04** Matt Black

**Note** Special stainless steel tape (18 mm) stretched from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Tunable White (TW – 5 / 10 m) version. LED strip that can be divided every 96,6 mm. INFINITO 6 and INFINITO 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Speciale nastro (18 mm) in acciaio inox teso da parete a parete. Disponibile da 6/12/18 m con un'unica alimentazione e illuminamento uniforme. Disponibile in versione Tunable White (TW – 5 / 10 m). Strip LED sezionabile ogni 96,6 mm. INFINITO 6 e INFINITO 12: apparecchi illuminanti alimentabili anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*




**INFINITO 6**
57W - 1,48A
48V DC
2700K - 6576lm / 3000K - 6708lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A2250300.27.20 |
| Matt White - 3000K | 1A2250300.30.20 |
| Matt Black - 2700K | 1A2250400.27.20 |
| Matt Black - 3000K | 1A2250400.30.20 |




**INFINITO 12**
114W - 2,61A
48V DC
2700K - 13152lm / 3000K - 13416lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A2260300.27.20 |
| Matt White - 3000K | 1A2260300.30.20 |
| Matt Black - 2700K | 1A2260400.27.20 |
| Matt Black - 3000K | 1A2260400.30.20 |




**INFINITO 18**
171W
48V DC
2700K - 19728lm / 3000K - 20124lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A2270300.27.20 |
| Matt White - 3000K | 1A2270300.30.20 |
| Matt Black - 2700K | 1A2270400.27.20 |
| Matt Black - 3000K | 1A2270400.30.20 |

**How to order - INFINITO 5 TW**

INFINITO 5 TW
1A4860300.96.20
1A4860400.96.20

\+

REMOTE DRIVER
1Z1120400

\+

CONTROLLER
1Z0830880

**How to order - INFINITO 10 TW**

INFINITO 10 TW
1A4870300.96.20
1A4870400.96.20

\+

2 x

REMOTE DRIVER
1Z1120400

\+

2 x

CONTROLLER
1Z0830880





**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

*Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*




**INFINITO 5 TW**
Tunable White
50W
24V DC
2700K / 6500K - 7650lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K / 6500K | 1A4860300.96.20 |
| Matt Black - 2700K / 6500K | 1A4860400.96.20 |




**INFINITO 10 TW**
Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K / 6500K | 1A4870300.96.20 |
| Matt Black - 2700K / 6500K | 1A4870400.96.20 |

## Compulsory accessories / Accessori obbligatori

### Drivers / Alimentatori




| Driver with plug / Alimentatore con spina | | | | Not included |
|---|---|---|---|---|
| Matt White | Input 100-240V - 50/60Hz<br>Output 48V - Max 57W - IP20<br>Dimmer on board | INFINITO 6 | 1X0060300.01.06 | |
| Matt Black | Input 100-240V - 50/60Hz<br>Output 48V - Max 57W - IP20<br>Dimmer on board | INFINITO 6 | 1X0060400.01.06 | |




| Driver with plug / Alimentatore con spina | | | | Not included |
|---|---|---|---|---|
| Matt White | Input 100-240V - 50/60Hz<br>Output 48V - Max 114W - IP20<br>Dimmer on board | INFINITO 12 | 1X0060300.02.06 | |
| Matt Black | Input 100-240V - 50/60Hz<br>Output 48V - Max 114W - IP20<br>Dimmer on board | INFINITO 12 | 1X0060400.02.06 | |




| Driver / Alimentatore | | | | Not included |
|---|---|---|---|---|
| 100-240V | 48V/80W/IP67/1-10V | INFINITO 6 /<br>INFINITO 5 TW | 1Z1120400 | |




| Driver / Alimentatore | | | | Not included |
|---|---|---|---|---|
| 100-240V | 48V/150W/IP67/1-10V | INFINITO 12 /<br>INFINITO 10 TW | 1Z1120250 | |




| Driver / Alimentatore | | | | Not included |
|---|---|---|---|---|
| 100-240V | 48V/240W/IP67/1-10V | INFINITO 18 | 1Z1120390 | |




| Controller | | | | Not included |
|---|---|---|---|---|
| | DALI - PUSH - 0/1-10V - TRIAC - IP20 | INFINITO 6 / INFINITO 12 /<br>INFINITO 18 | 1Z2170010 | |

| Controller Casambi - Tunable white | | | | Not included |
|---|---|---|---|---|
| | | INFINITO 5 TW /<br>INFINITO 10 TW | 1Z0830880 | |





## Optional accessories / Accessori opzionali

### Installation kits / Kit d'installazione

| Spacer / Distanziale | | | | Not included |
|---|---|---|---|---|
| Matt White | For driver kit with plug | INFINITO 6 / INFINITO 12 | 1A4930300.00.00 | |
| Matt Black | For driver kit with plug | INFINITO 6 / INFINITO 12 | 1A4930400.00.00 | |




| Ceiling installation kit / Kit d'installazione da soffitto | | Not included |
|---|---|---|
| Matt Black | 1A0080400.00.00 | |

| Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45° | | Not included |
|---|---|---|
| Matt Black | 1A0120400.00.00 | |

| Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro | | Not included |
|---|---|---|
| Matt Black | 1A0340400.00.00 | |

| Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro | | Not included |
|---|---|---|
| Matt Black | 1A0350400.00.00 | |

| Swallows / Rondini | | Not included |
|---|---|---|
| Matt Black | 1A0290400.00.00 | |

**How to order - FLASH 6**

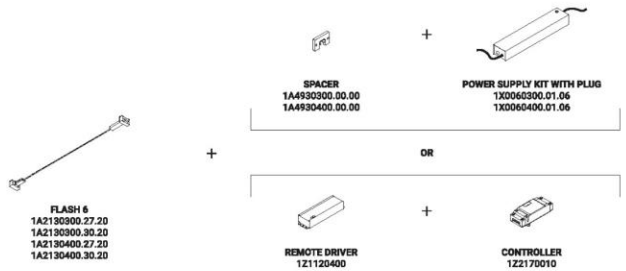


**How to order - FLASH 12**

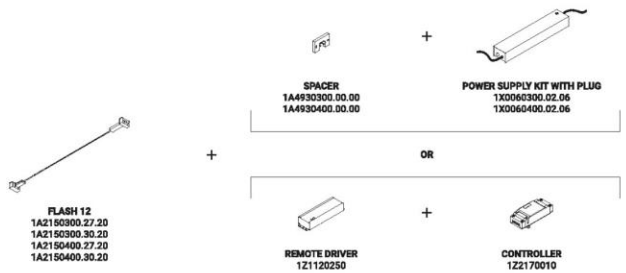


**How to order - FLASH 18**

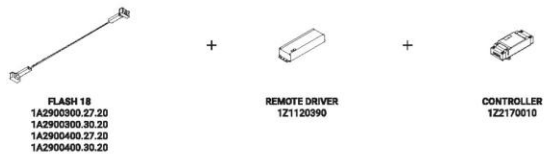






Wall-Systems / Direct / Indoor

**Material** Metal

**Finish** **.03** Matt White **.04** Matt Black

**Note** Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW – 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required). FLASH 6 and FLASH 12: possibility for the luminaires to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Speciale nastro (9 mm) in acciaio inox teso da parete a parete. Disponibile da 6/12/18 m con un'unica alimentazione e illuminamento uniforme. Disponibile in versione a Doppia Emissione (DE) e in versione Tunable White (TW – 5 / 10 m). Strip LED sezionabile ogni 96,6 mm. Le versioni DE sono realizzabili con doppia accensione (necessari due driver). FLASH 6 e FLASH 12: apparecchi illuminanti alimentabili anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabili, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*




**FLASH 6**
57W - 1,48A
48V DC
2700K - 6576lm / 3000K - 6708lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A2130300.27.20 |
| Matt White - 3000K | 1A2130300.30.20 |
| Matt Black - 2700K | 1A2130400.27.20 |
| Matt Black - 3000K | 1A2130400.30.20 |




**FLASH 12**
114W - 2,61A
48V DC
2700K - 13152lm / 3000K - 13416lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A2150300.27.20 |
| Matt White - 3000K | 1A2150300.30.20 |
| Matt Black - 2700K | 1A2150400.27.20 |
| Matt Black - 3000K | 1A2150400.30.20 |




**FLASH 18**
171W
48V DC
2700K - 19728lm / 3000K - 20124lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A2900300.27.20 |
| Matt White - 3000K | 1A2900300.30.20 |
| Matt Black - 2700K | 1A2900400.27.20 |
| Matt Black - 3000K | 1A2900400.30.20 |

**How to order - FLASH 6 DE**

FLASH 6 DE
1A1290300.27.20
1A1290300.30.20
1A1290400.27.20
1A1290400.30.20

\+

2 x

REMOTE DRIVER
1Z1120400

\+

2 x

CONTROLLER
1Z2170010

**How to order - FLASH 12 DE**

FLASH 12 DE
1A1300300.27.20
1A1300300.30.20
1A1300400.27.20
1A1300400.30.20

\+

2 x

REMOTE DRIVER
1Z1120250

\+

2 x

CONTROLLER
1Z2170010

**How to order - FLASH 18 DE**

FLASH 18 DE
1A1310300.27.20
1A1310300.30.20
1A1310400.27.20
1A1310400.30.20

\+

2 x

REMOTE DRIVER
1Z1120390

\+

2 x

CONTROLLER
1Z2170010

**FLASH 6 DE**
Dual emission
114W
48V DC
2700K - Up 6576lm - Down 6576lm /
3000K - Up 6708lm - Down 6708lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A1290300.27.20 |
| Matt White - 3000K | 1A1290300.30.20 |
| Matt Black - 2700K | 1A1290400.27.20 |
| Matt Black - 3000K | 1A1290400.30.20 |




**FLASH 12 DE**
Dual emssion
228W
48V DC
2700K - Up 13152lm - Down 13152lm /
3000K - Up 13416lm - Down 13416lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A1300300.27.20 |
| Matt White - 3000K | 1A1300300.30.20 |
| Matt Black - 2700K | 1A1300400.27.20 |
| Matt Black - 3000K | 1A1300400.30.20 |




**FLASH 18 DE**
Dual emission
342W
48V DC
2700K - Up 19728lm - Down 19728lm /
3000K - Up 20124lm - Down 20124lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A1310300.27.20 |
| Matt White - 3000K | 1A1310300.30.20 |
| Matt Black - 2700K | 1A1310400.27.20 |
| Matt Black - 3000K | 1A1310400.30.20 |

## How to order - FLASH 5 TW

FLASH 5 TW
1A4820300.96.20
1A4820400.96.20

+

REMOTE DRIVER
1Z1120400

+

CONTROLLER
1Z0830880

## How to order - FLASH 10 TW

FLASH 10 TW
1A4830300.96.20
1A4830400.96.20

+

2 x

REMOTE DRIVER
1Z1120400

+

2 x

CONTROLLER
1Z0830880





**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

*Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*




**FLASH 5 TW**
Tunable White
50W
24V DC
2700K / 6500K - 7650lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K / 6500K | 1A4820300.96.20 |
| Matt Black - 2700K / 6500K | 1A4820400.96.20 |




**FLASH 10 TW**
Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K / 6500K | 1A4830300.96.20 |
| Matt Black - 2700K / 6500K | 1A4830400.96.20 |

**How to order - FLASH 5 DE TW**

FLASH 5 DE TW
1A4840300.96.20
1A4840400.96.20

\+

2 x

REMOTE DRIVER
1Z1120400

\+

2 x

CONTROLLER
1Z0830880

**How to order - FLASH 10 DE TW**

FLASH 10 DE TW
1A4850300.96.20
1A4850400.96.20

\+

4 x

REMOTE DRIVER
1Z1120400

\+

4 x

CONTROLLER
1Z0830880





**Note** Tunable White describes the variable colour temperature controls from warm white to cool white light.

*Tunable White è la regolazione variabile della temperatura di colore della luce dalla tonalità calda a quella fredda.*




**FLASH 5 DE TW**
Dual emission - Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K / 6500K | 1A4840300.96.20 |
| Matt Black - 2700K / 6500K | 1A4840400.96.20 |




**FLASH 10 DE TW**
Dual emission - Tunable White
200W
24V DC
2700K / 6500K - 30600lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K / 6500K | 1A4850300.96.20 |
| Matt Black - 2700K / 6500K | 1A4850400.96.20 |

## Compulsory accessories / Accessori obbligatori

### Drivers / Alimentatori




| Driver with plug / Alimentatore con spina | | | | Not included |
|---|---|---|---|---|
| Matt White | Input 100-240V - 50/60Hz<br>Output 48V - Max 57W - IP20<br>Dimmer on board | FLASH 6 | 1X0060300.01.06 | |
| Matt Black | Input 100-240V - 50/60Hz<br>Output 48V - Max 57W - IP20<br>Dimmer on board | FLASH 6 | 1X0060400.01.06 | |




| Driver with plug / Alimentatore con spina | | | | Not included |
|---|---|---|---|---|
| Matt White | Input 100-240V - 50/60Hz<br>Output 48V - Max 114W - IP20<br>Dimmer on board | FLASH 12 | 1X0060300.02.06 | |
| Matt Black | Input 100-240V - 50/60Hz<br>Output 48V - Max 114W - IP20<br>Dimmer on board | FLASH 12 | 1X0060400.02.06 | |




| Driver / Alimentatore | | | | Not included |
|---|---|---|---|---|
| 100-240V | 48V/80W/IP67/1-10V | FLASH 6 / FLASH 6 DE /<br>FLASH 5 TW /<br>FLASH 5 DE TW | 1Z1120400 | |




| Driver / Alimentatore | | | | Not included |
|---|---|---|---|---|
| 100-240V | 48V/150W/IP67/1-10V | FLASH 12 / FLASH 12 DE /<br>FLASH 10 TW /<br>FLASH 10 DE TW | 1Z1120250 | |




| Driver / Alimentatore | | | | Not included |
|---|---|---|---|---|
| 100-240V | 48V/240W/IP67/1-10V | FLASH 18 / FLASH 18 DE | 1Z1120390 | |




| Controller | | | | Not included |
|---|---|---|---|---|
| | DALI - PUSH - 0/1-10V - TRIAC - IP20 | FLASH 6 / FLASH 12 /<br>FLASH 18 / FLASH 6 DE /<br>FLASH 12 DE / FLASH 18 DE | 1Z2170010 | |

| Controller Casambi - Tunable white | | | | Not included |
|---|---|---|---|---|
| | | FLASH 5 TW /<br>FLASH 10 TW /<br>FLASH 5 DE TW /<br>FLASH 10 DE TW | 1Z0830880 | |





## Optional accessories / Accessori opzionali

### Installation kits / Kit d'installazione

| Spacer / Distanziale | | | | Not included |
|---|---|---|---|---|
| Matt White | For driver kit with plug | FLASH 6 / FLASH 12 | 1A4930300.00.00 | |
| Matt Black | For driver kit with plug | FLASH 6 / FLASH 12 | 1A4930400.00.00 | |




| Ceiling installation kit / Kit d'installazione da soffitto | | Not included |
|---|---|---|
| Matt Black | 1A0080400.00.00 | |

| Kit wall connection vertical sloped 45° / Kit attacco da parete per inclinazione verticale 45° | | Not included |
|---|---|---|
| Matt Black | 1A0120400.00.00 | |

| Kit wall connection sloped right 75° / Kit attacco da parete per inclinazione 75° destro | | Not included |
|---|---|---|
| Matt Black | 1A0340400.00.00 | |

| Kit wall connection sloped left 75° / Kit attacco da parete per inclinazione 75° sinistro | | Not included |
|---|---|---|
| Matt Black | 1A0350400.00.00 | |

| Swallows / Rondini | | Not included |
|---|---|---|
| Matt Black | 1A0800400.00.00 | |

PLAY

# OHM

Design Davide Groppi – 2019

Light runs on a wire. An almost imperceptible wire, suspended in space. Like a tightrope walker on a thin rope, the light reaches everywhere, weightless and wonderful. Ohm is an electro mechanic project that takes maximum advantage of the characteristics of luminous diodes. Its secret is a special unipolar wire stretched from wall to wall. Where the light comes from is discreetly hidden, giving all the attention to what it is illuminating. It is possible to replace the light source even with the luminaire assembled.
Luminaire designed also to be powered by ENDLESS conductive tape.

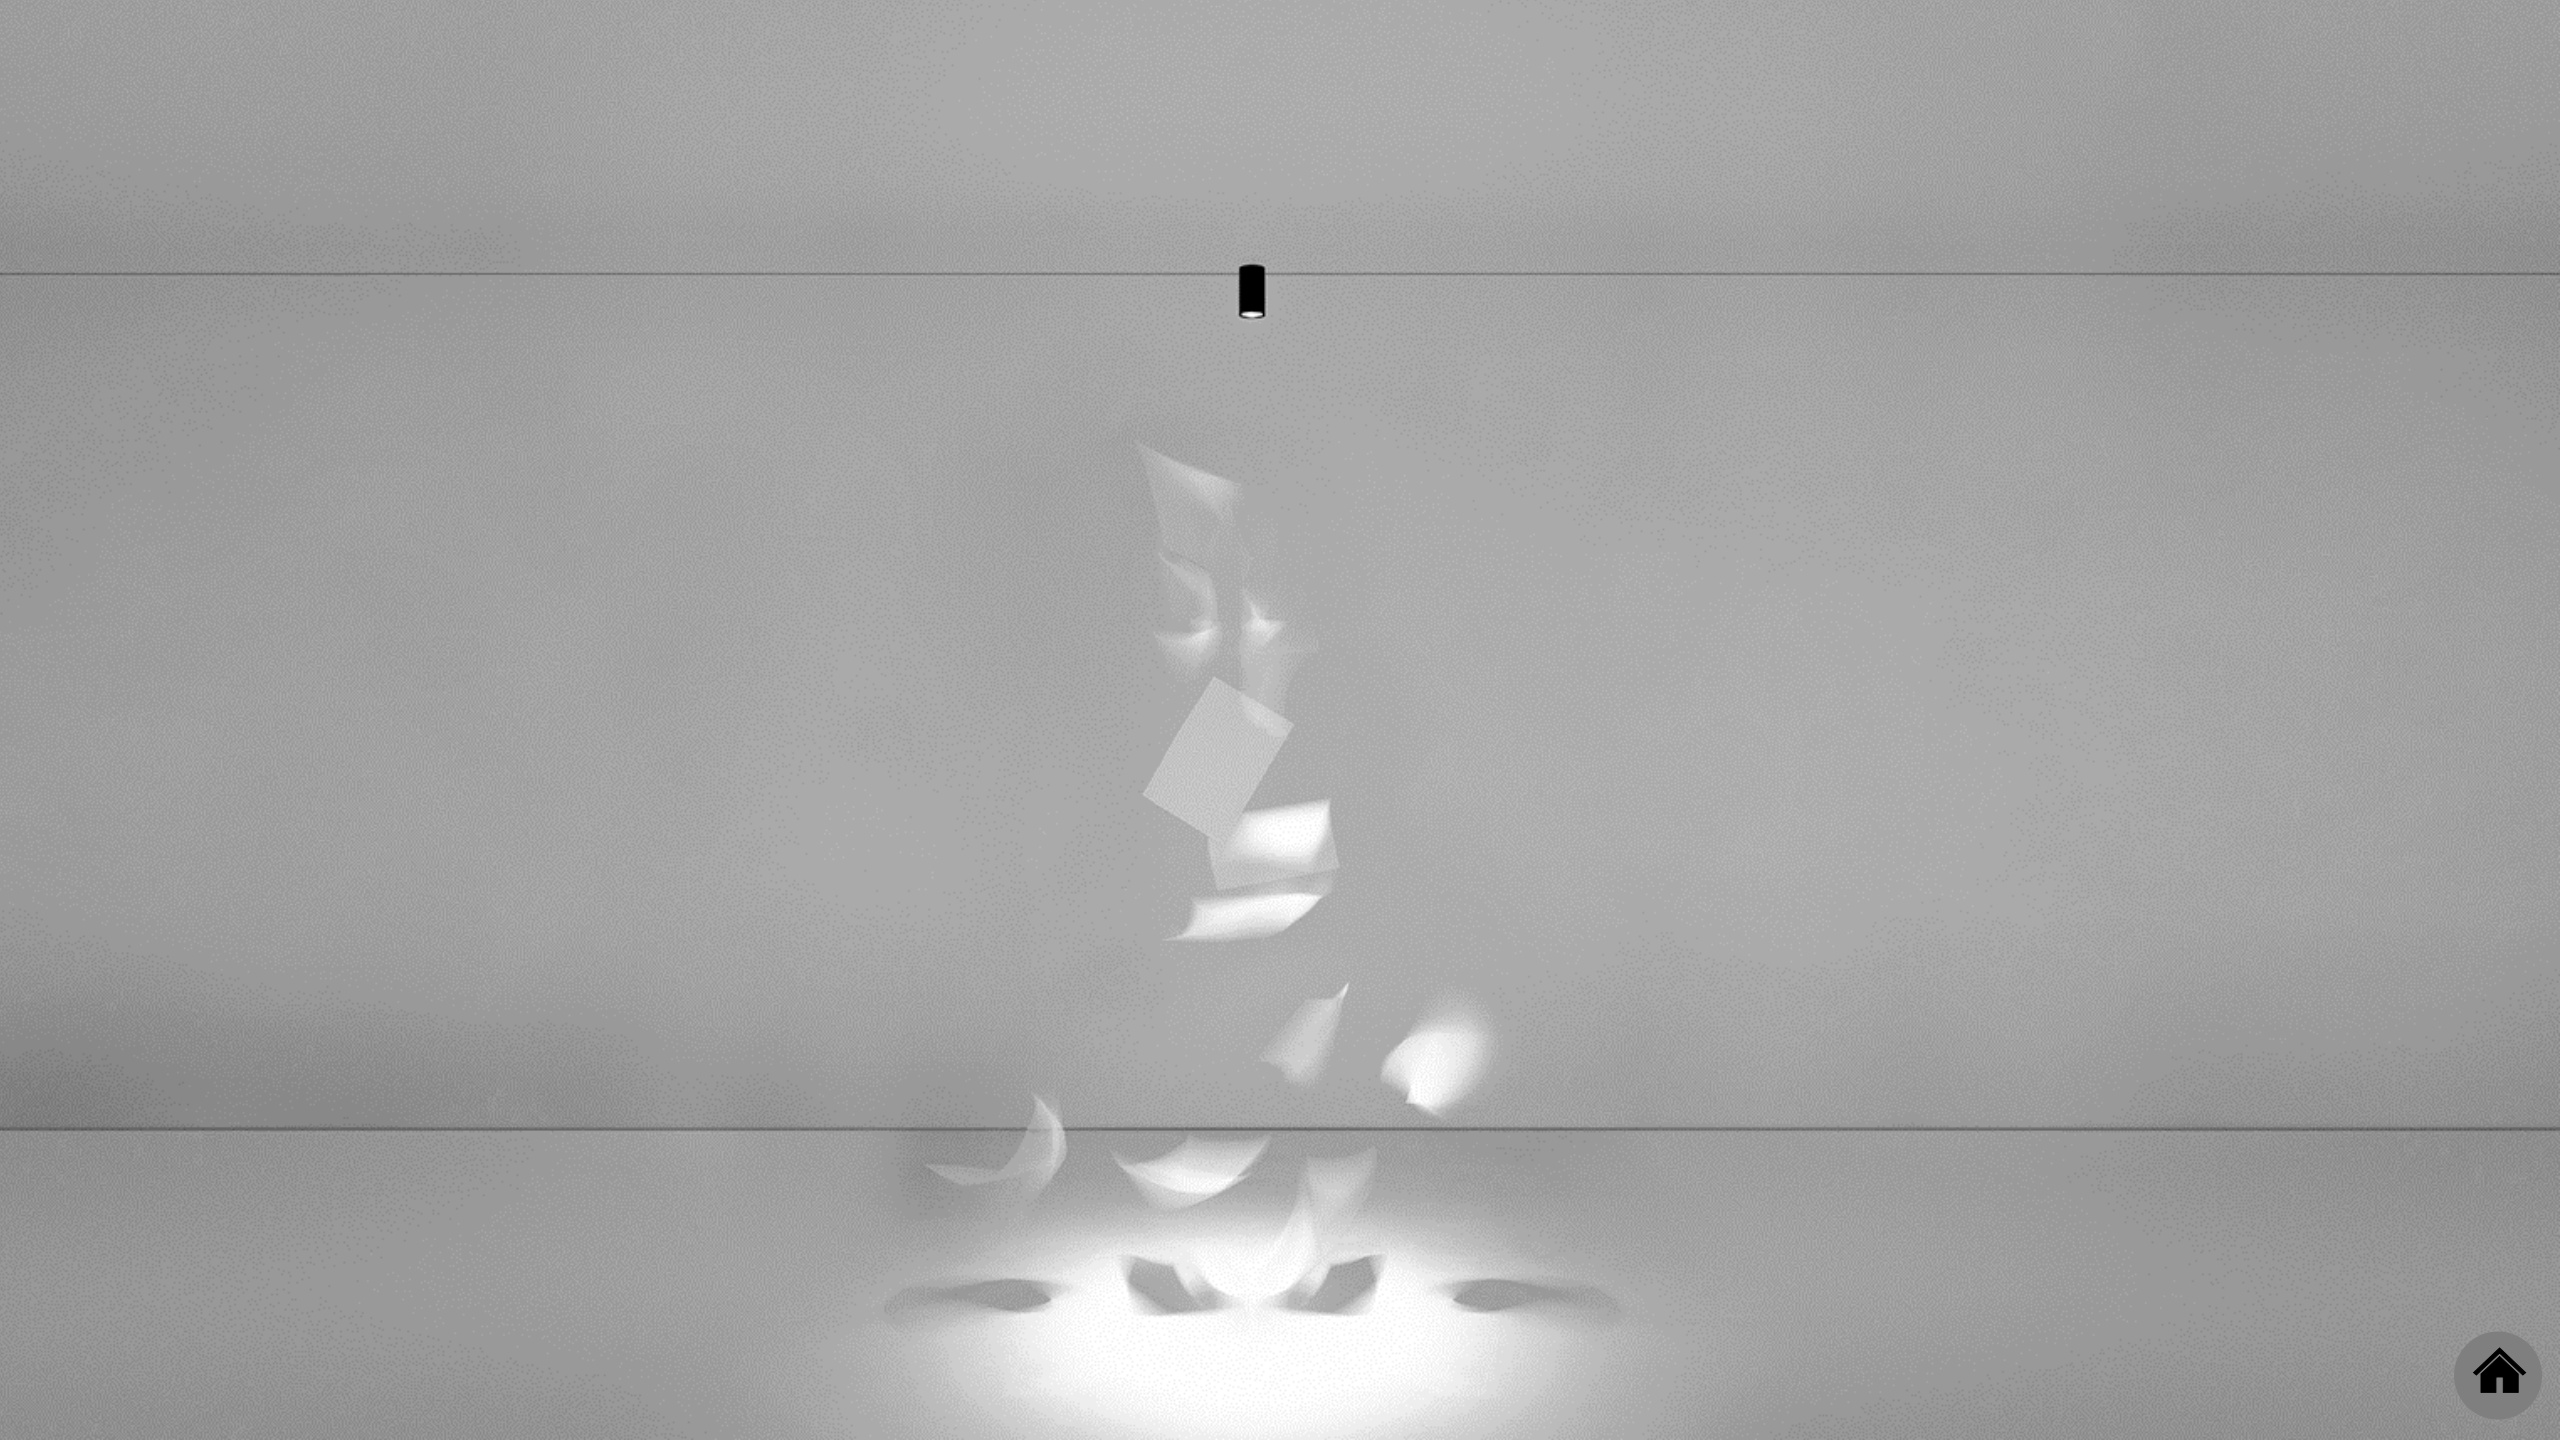

# OHM
COMPONENTS

TIE ROD

WIRE

WALL / CEILING ROSE

OHM SPOT

WIRE GUIDE

LENS

WEIGHT KIT

# OHM

REMOTE DRIVER VERSION



# OHM

TIE ROD

**OHM**

TIE ROD

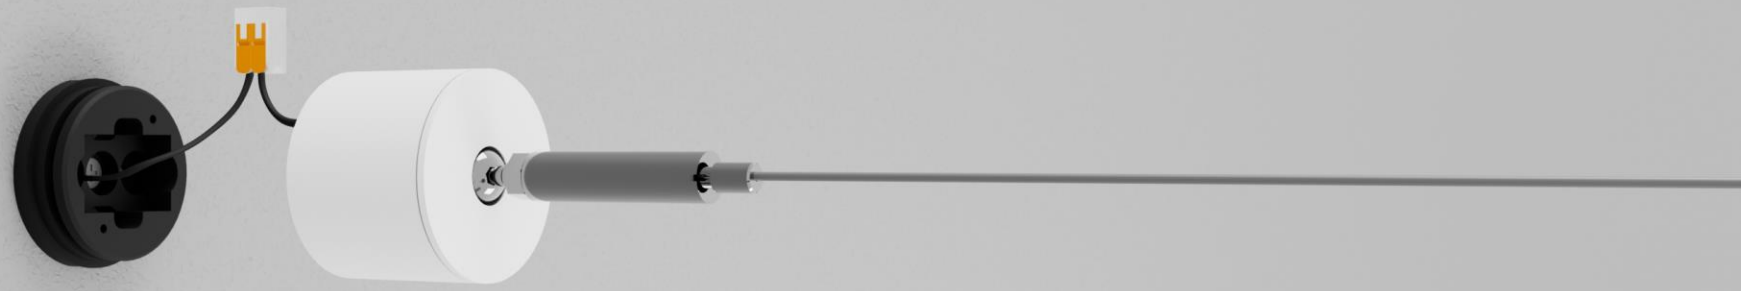

# OHM

TIE ROD

# OHM

SPOT

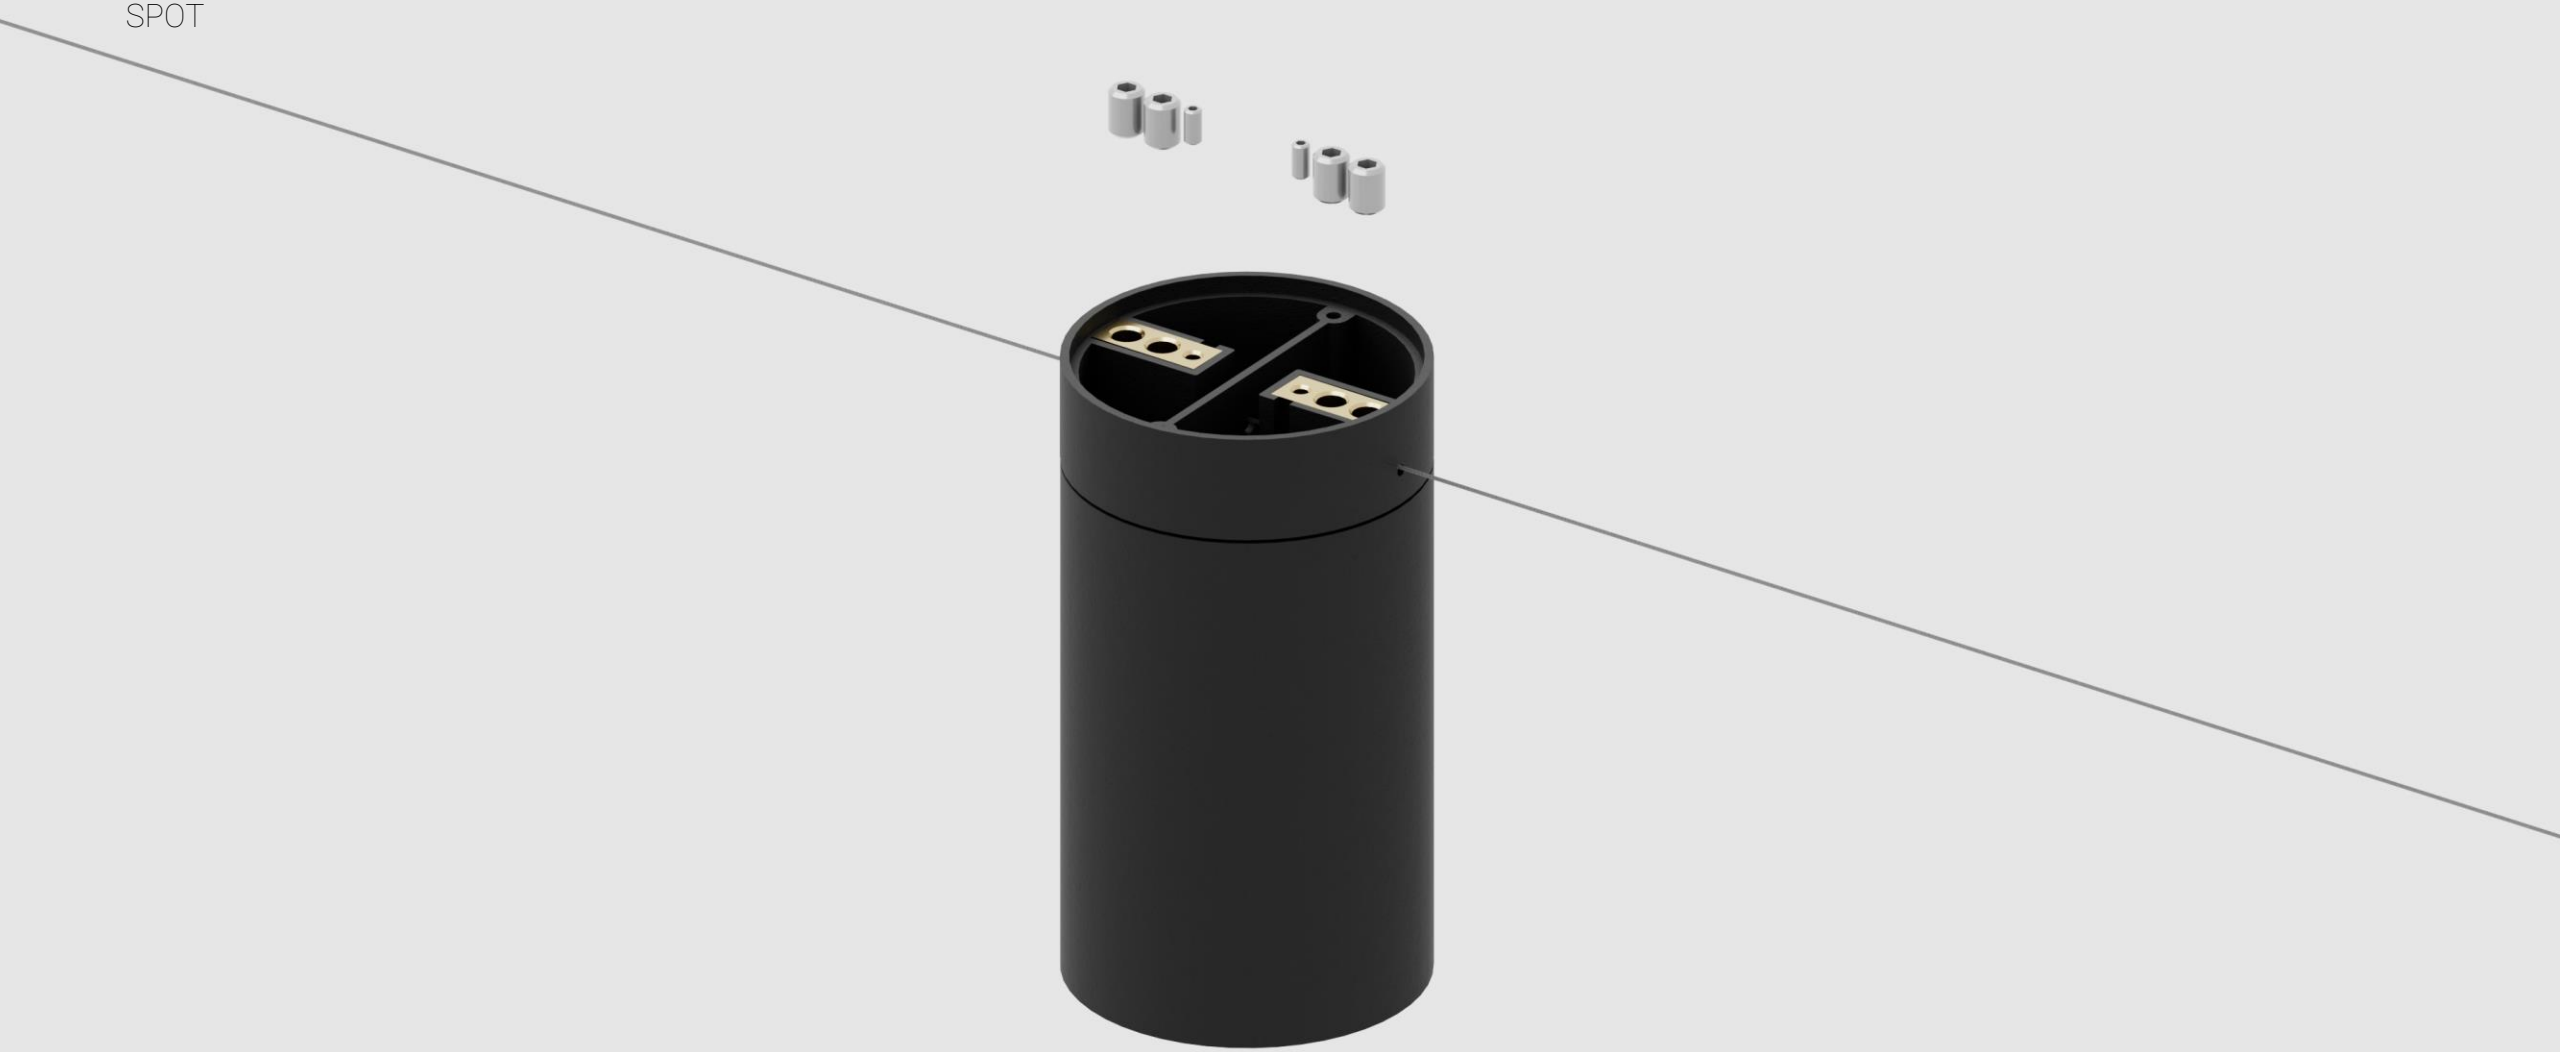

# OHM

SPOT

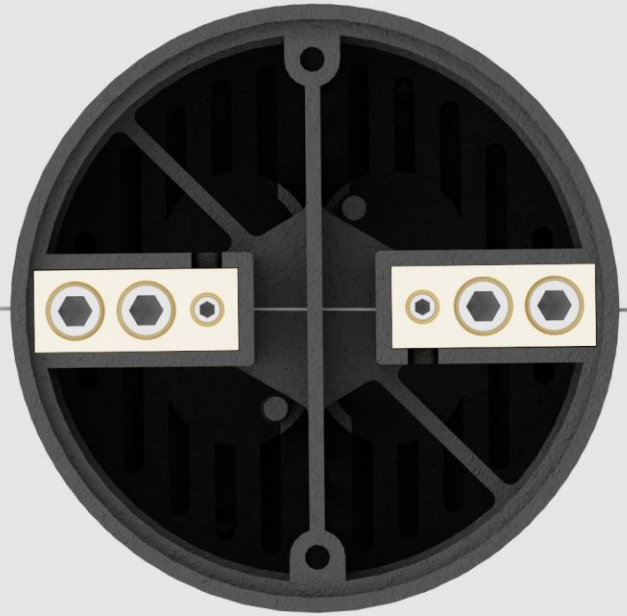

# OHM

SPOT

# OHM

SPOT

# OHM

SPOT

# OHM

SPOT

# OHM

SPOT

# OHM

SPOT

# OHM

WIRE GUIDE

# OHM

WIRE GUIDE

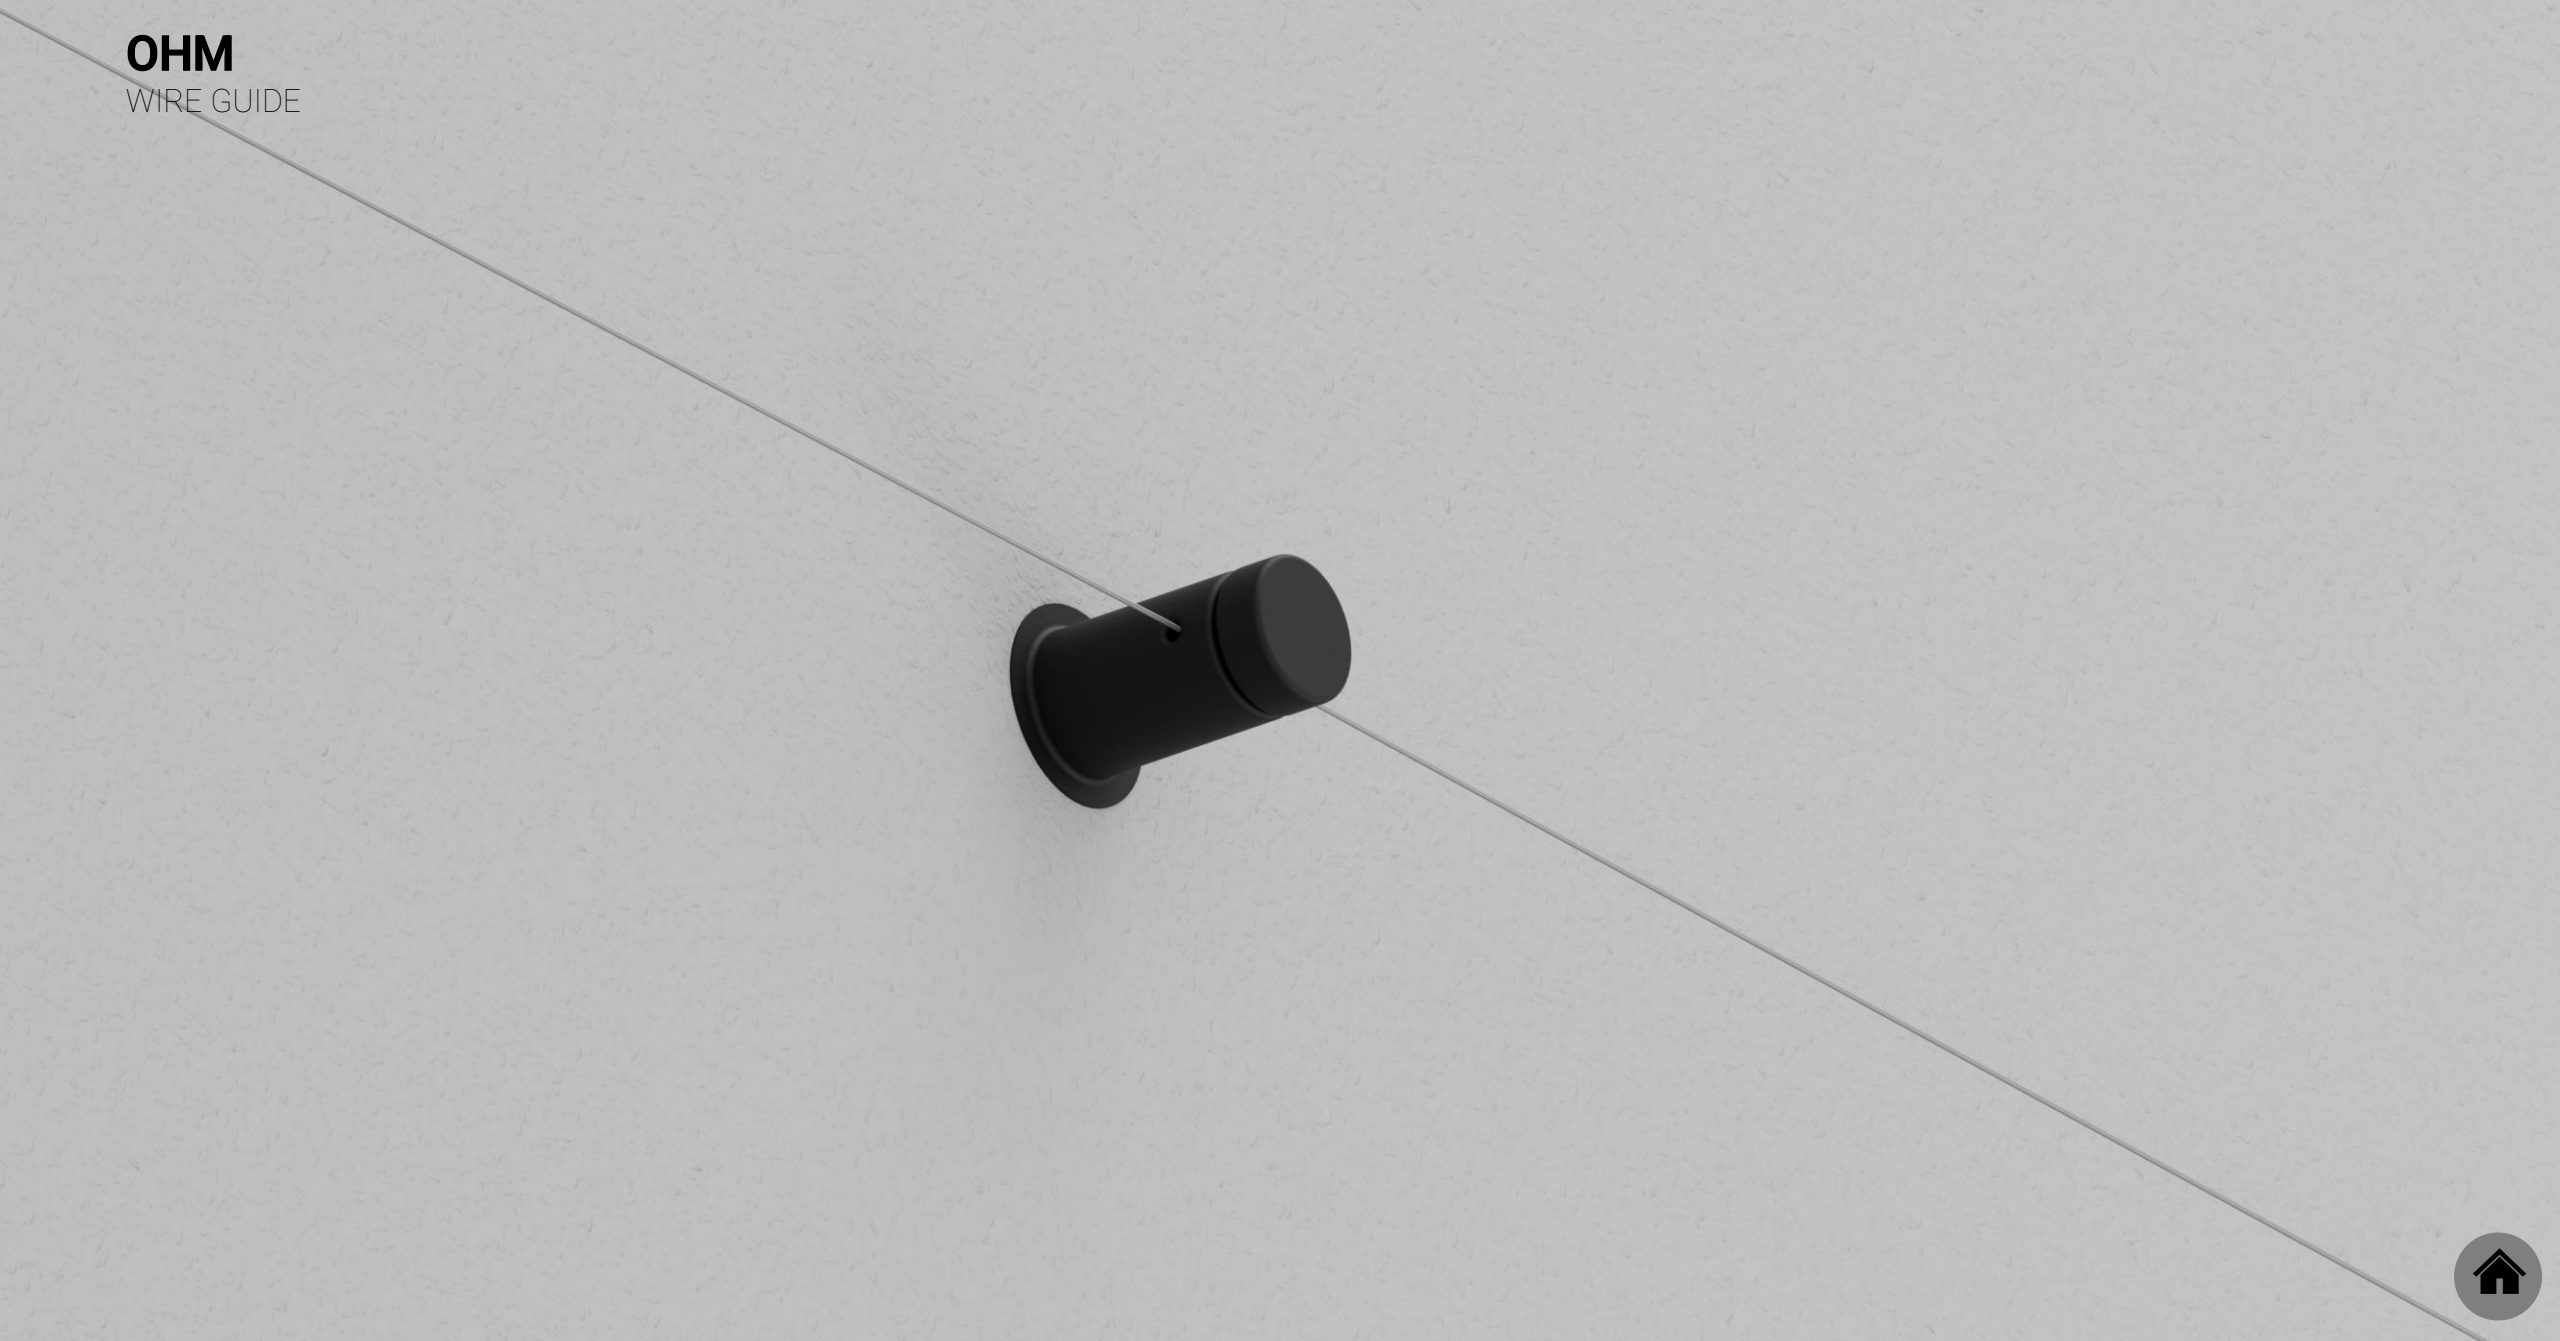

# OHM

WIRE GUIDE

# OHM

WALL AND CEILING ROSE VERSION



# OHM

WALL AND CEILING ROSE

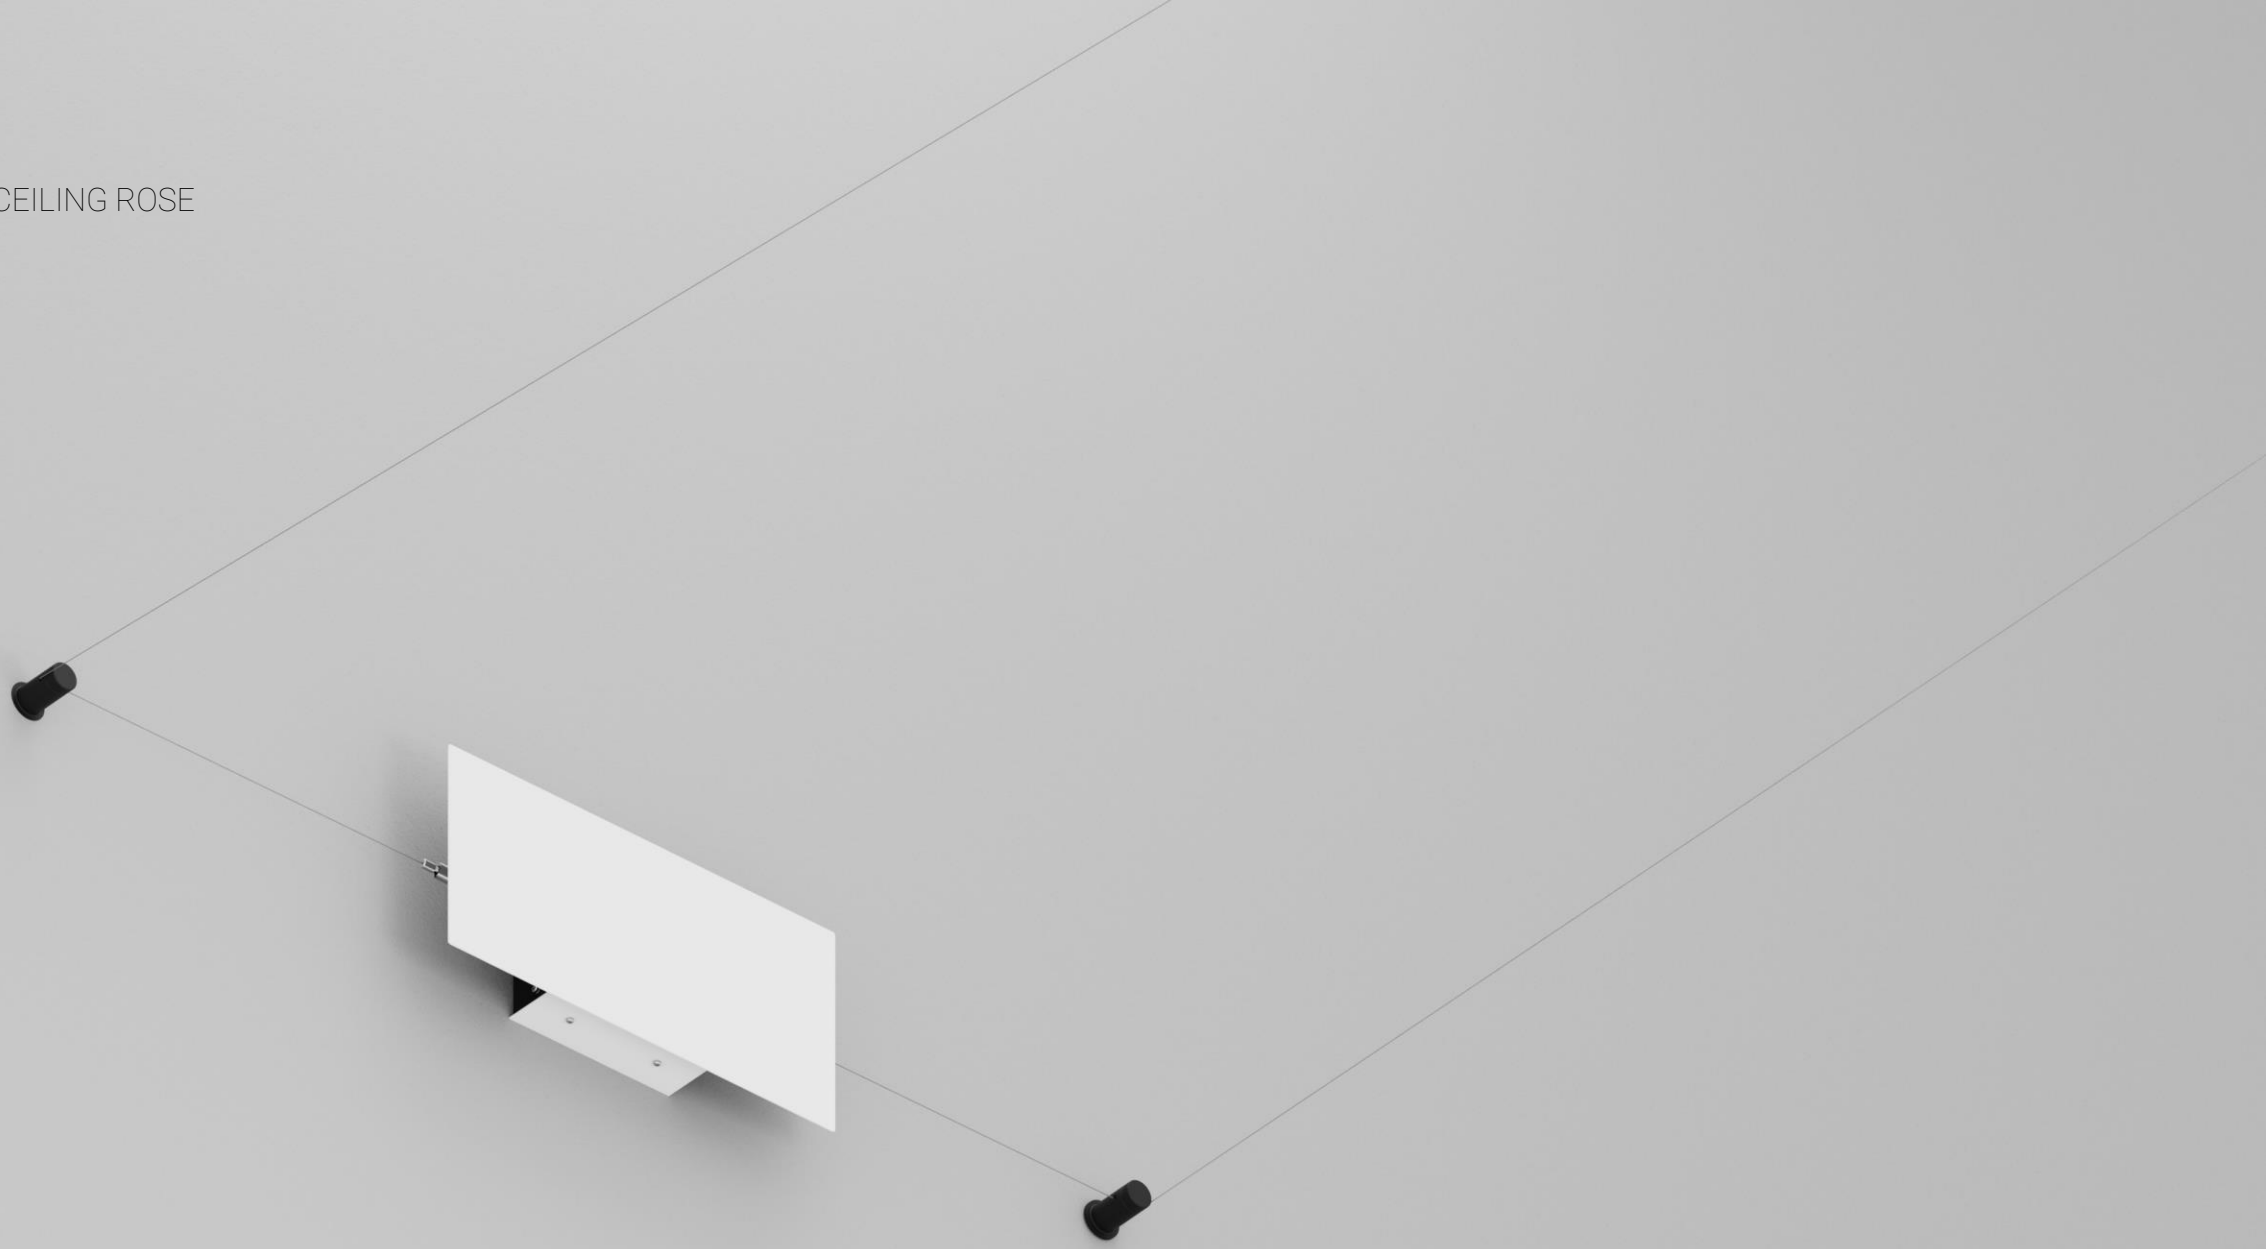

# OHM

SUSPENSION VERSION

# OHM

WEIGHT KIT

# OHM

WEIGHT KIT

# VERSIONS

## OHM

Davide Groppi / 2019

**Remote driver version**

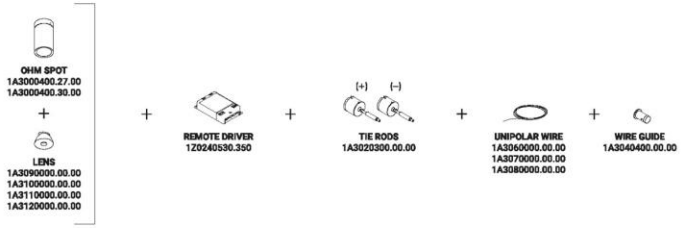


**Wall and ceiling rose version**

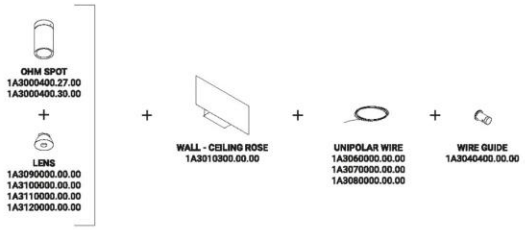


**Suspension version**

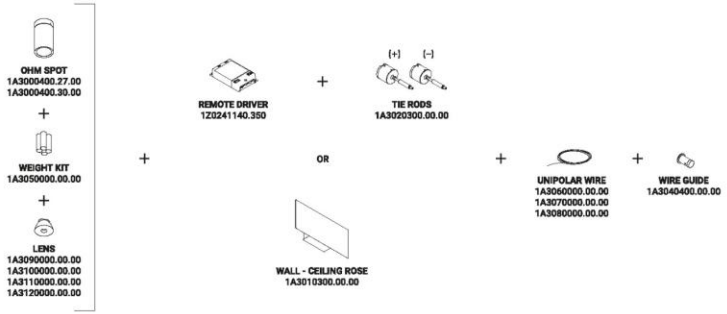


Davide Groppi / 2019

OHM

-Systems-Systems / Direct / Indoor

**Material** Metal - PA

**Finish** **.04** Matt Black

**Note** Special single-pole cable running between two walls and ceiling - Max 4 Spot on unipolar wire.

*Speciale cavo unipolare tirato da parete a parete o a soffitto - Max 4 Spot su cavo unipolare.*

**OHM SPOT**
3,2W
Max 350mA DC
2700K / 3000K
CRI 95
Driver not included
CE IP20

| | |
|---|---|
| Matt Black - 2700K | 1A3000400.27.20 |
| Matt Black - 3000K | 1A3000400.30.20 |

### Compulsory accessories / Accessori obbligatori

Installation kit / Kit installazione

| Tie rods / Tiranti | | | Not included |
|---|---|---|---|
| Matt White | 2 Pieces | 1A3020300.00.00 | |

| Unipolar wire - 12m / Cavo unipolare - 12m | | | Not included |
|---|---|---|---|
| | Max 60V DC | 1A3060000.00.00 | |

| Unipolar wire - 24m / Cavo unipolare - 24m | | | Not included |
|---|---|---|---|
| | Max 60V DC | 1A3070000.00.00 | |

| Unipolar wire - 48m / Cavo unipolare - 48m | | | Not included |
|---|---|---|---|
| | Max 60V DC | 1A3080000.00.00 | |

# OHM

REMOTE DRIVER VERSION

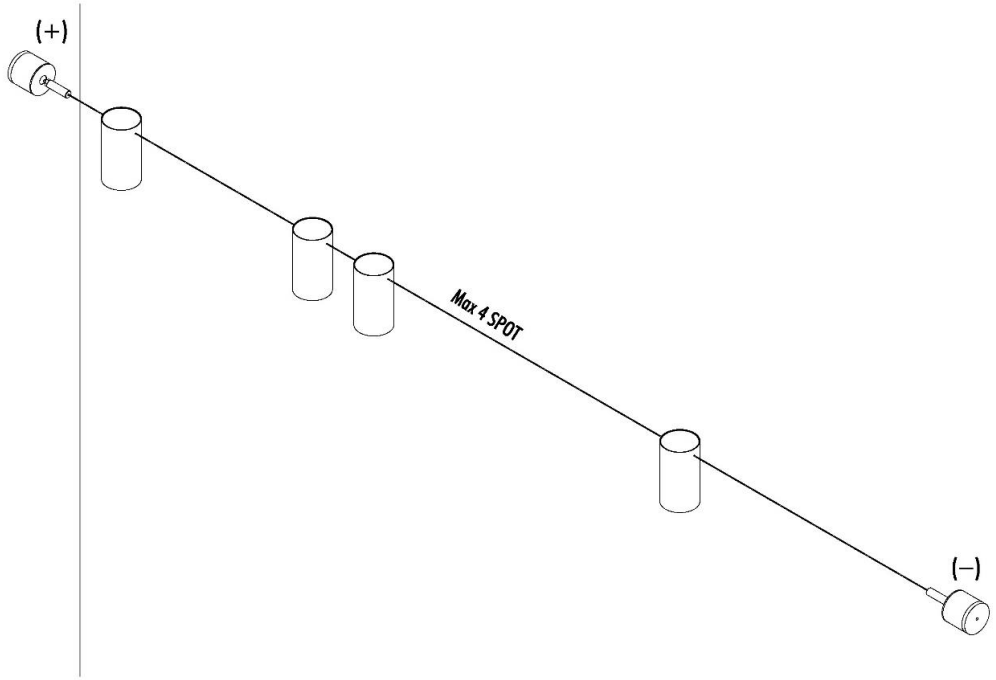


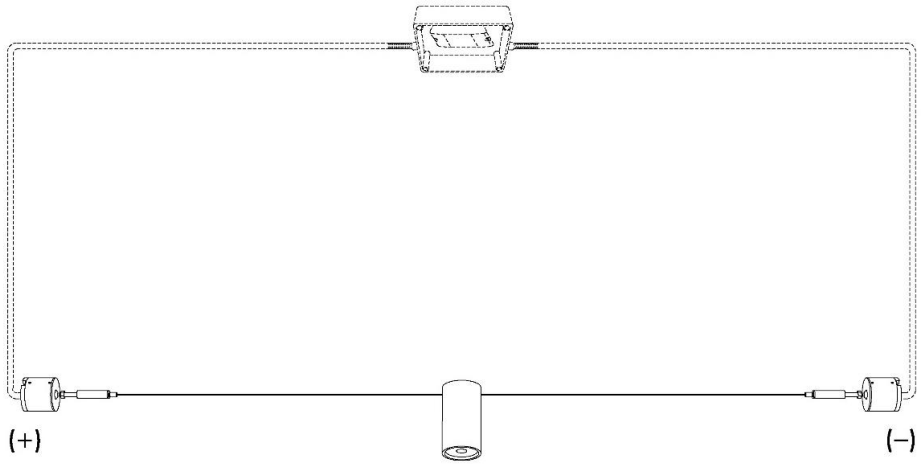

# OHM

REMOTE DRIVER VERSION



**OHM SPOT**
1A3000400.27.00
1A3000400.30.00

+

**LENS**
1A3090000.00.00
1A3100000.00.00
1A3110000.00.00
1A3120000.00.00

+



**REMOTE DRIVER**
1Z0240530.350

+




**TIE RODS**
1A3020300.00.00

+



**UNIPOLAR WIRE**
1A3060000.00.00
1A3070000.00.00
1A3080000.00.00

+

**WIRE GUIDE**
1A3040400.00.00

# OHM

WALL AND CEILING ROSE

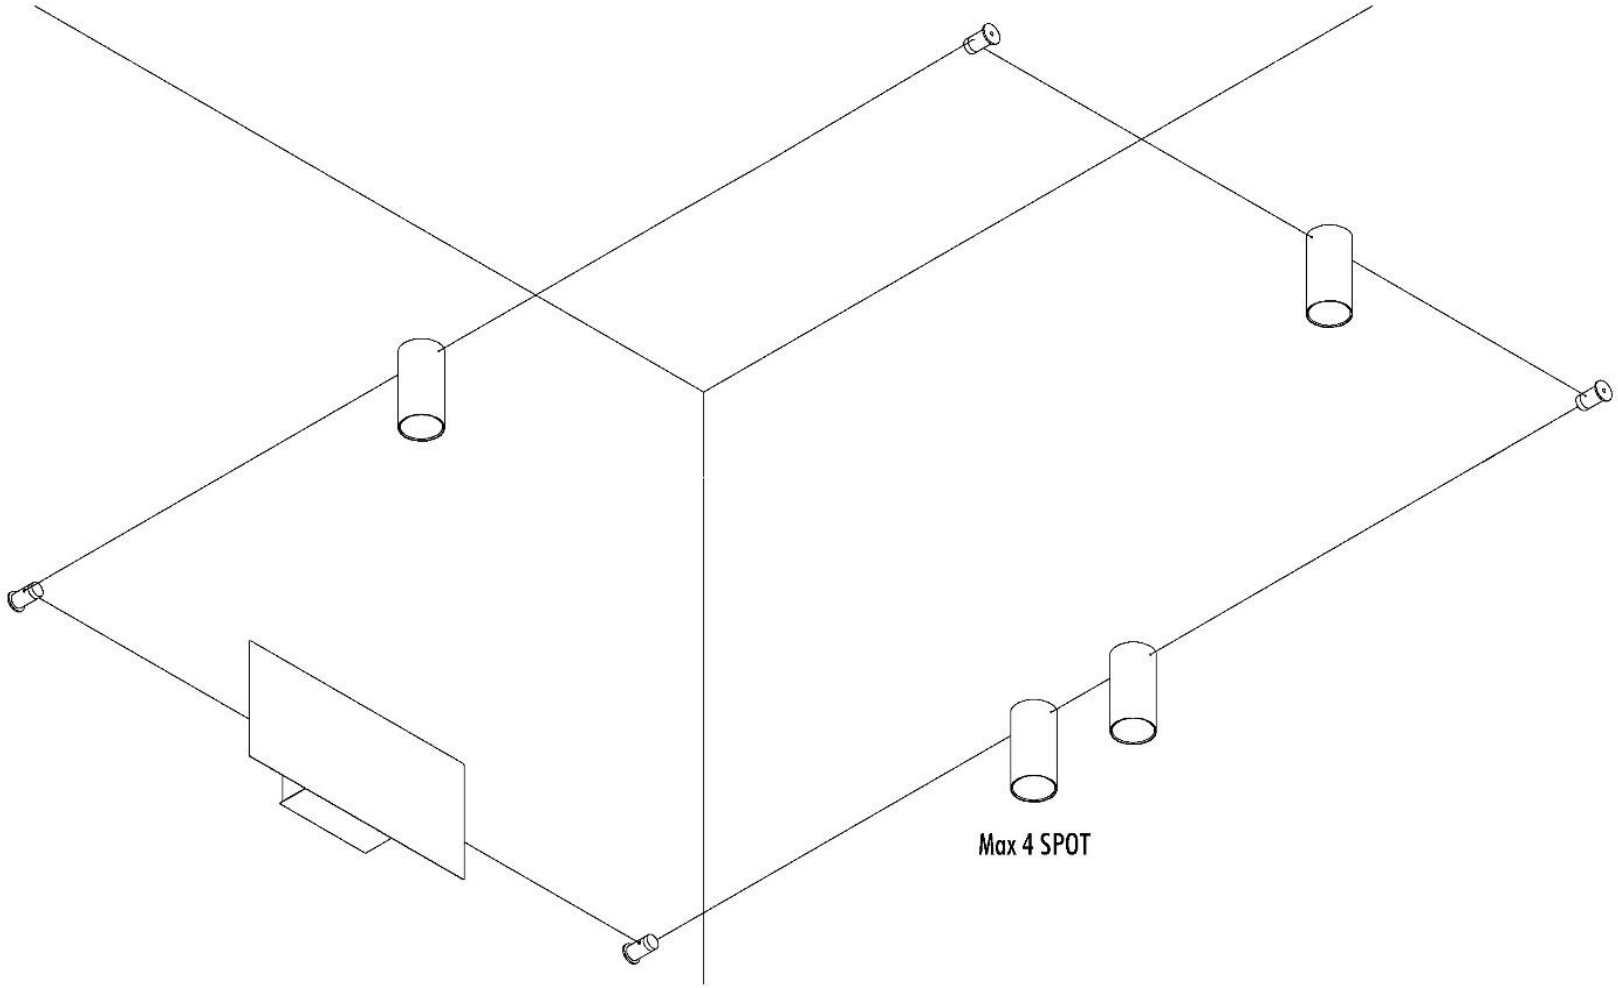

# OHM

WALL AND CEILING ROSE VERSION



**OHM SPOT**
1A3000400.27.00
1A3000400.30.00

+

**LENS**
1A3090000.00.00
1A3100000.00.00
1A3110000.00.00
1A3120000.00.00

+



**WALL - CEILING ROSE**
1A3010300.00.00

+



**UNIPOLAR WIRE**
1A3060000.00.00
1A3070000.00.00
1A3080000.00.00

+

**WIRE GUIDE**
1A3040400.00.00

# OHM

SUSPENSION VERSION

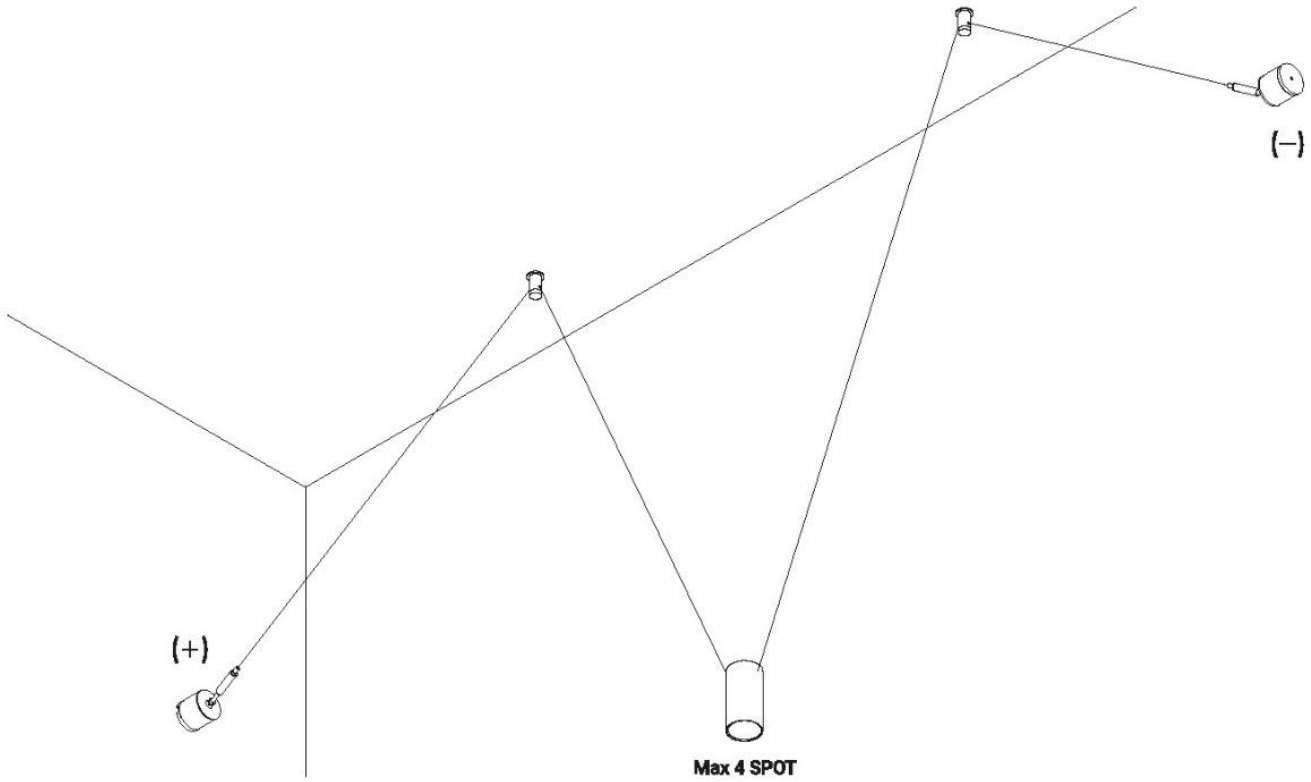

# OHM

SUSPENSION VERSION



**OHM SPOT**
1A3000400.27.00
1A3000400.30.00

+



**WEIGHT KIT**
1A3050000.00.00

+

**LENS**
1A3090000.00.00
1A3100000.00.00
1A3110000.00.00
1A3120000.00.00

+



**REMOTE DRIVER**
1Z0240530.350

+




**TIE RODS**
1A3020300.00.00

+

OR



**WALL - CEILING ROSE**
1A3010300.00.00

+

+

**UNIPOLAR WIRE**
1A3060000.00.00
1A3070000.00.00
1A3080000.00.00

**WIRE GUIDE**
1A3040400.00.00

davide groppi

PLAY

# MAGIA

Design Michele Groppi – 2023

Light and transparency are the true stars of this project.
We have always liked to think heretically, evoking mystery, magic and seduction.
Magia is the new modular suspension lighting system that can be adapted to suit the different heights of the rooms and can generate direct and indirect light with the 360° adjustable module.
In this case, the lens is not used to focus, but to modify the vision and perception of the object.
The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency.
Luminaire designed also to be powered by ENDLESS conductive tape

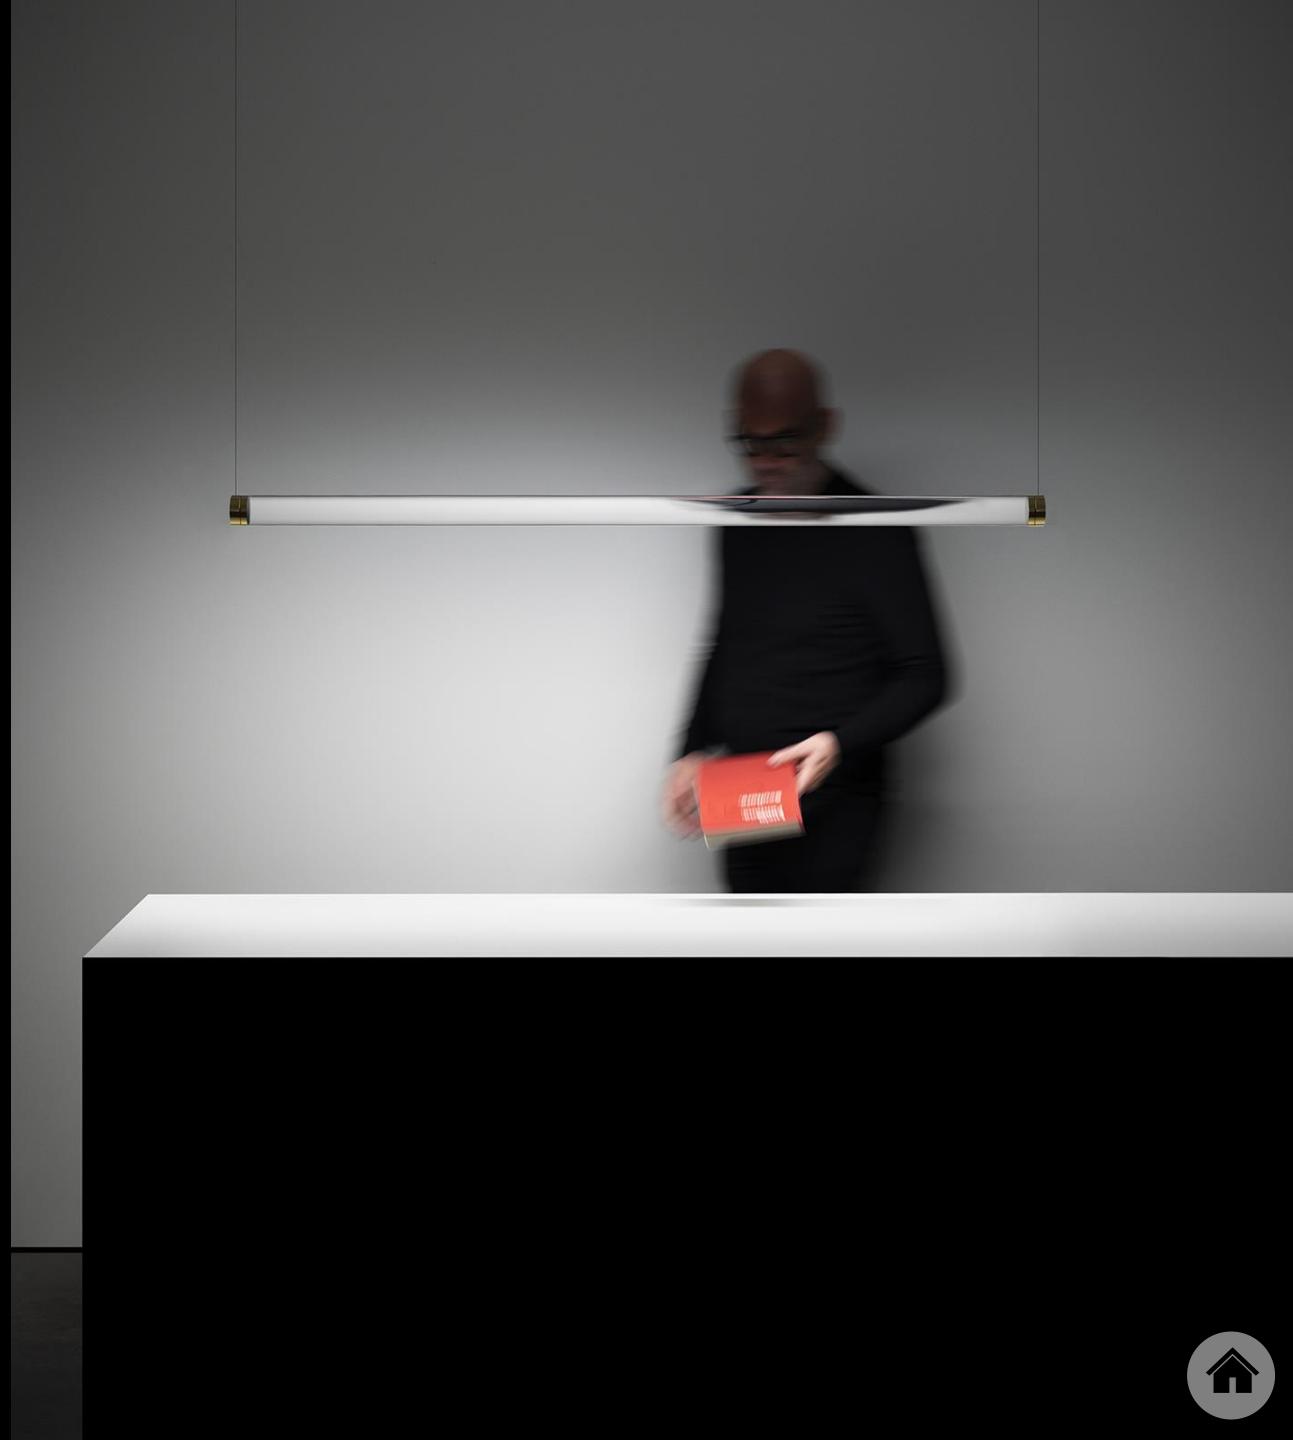

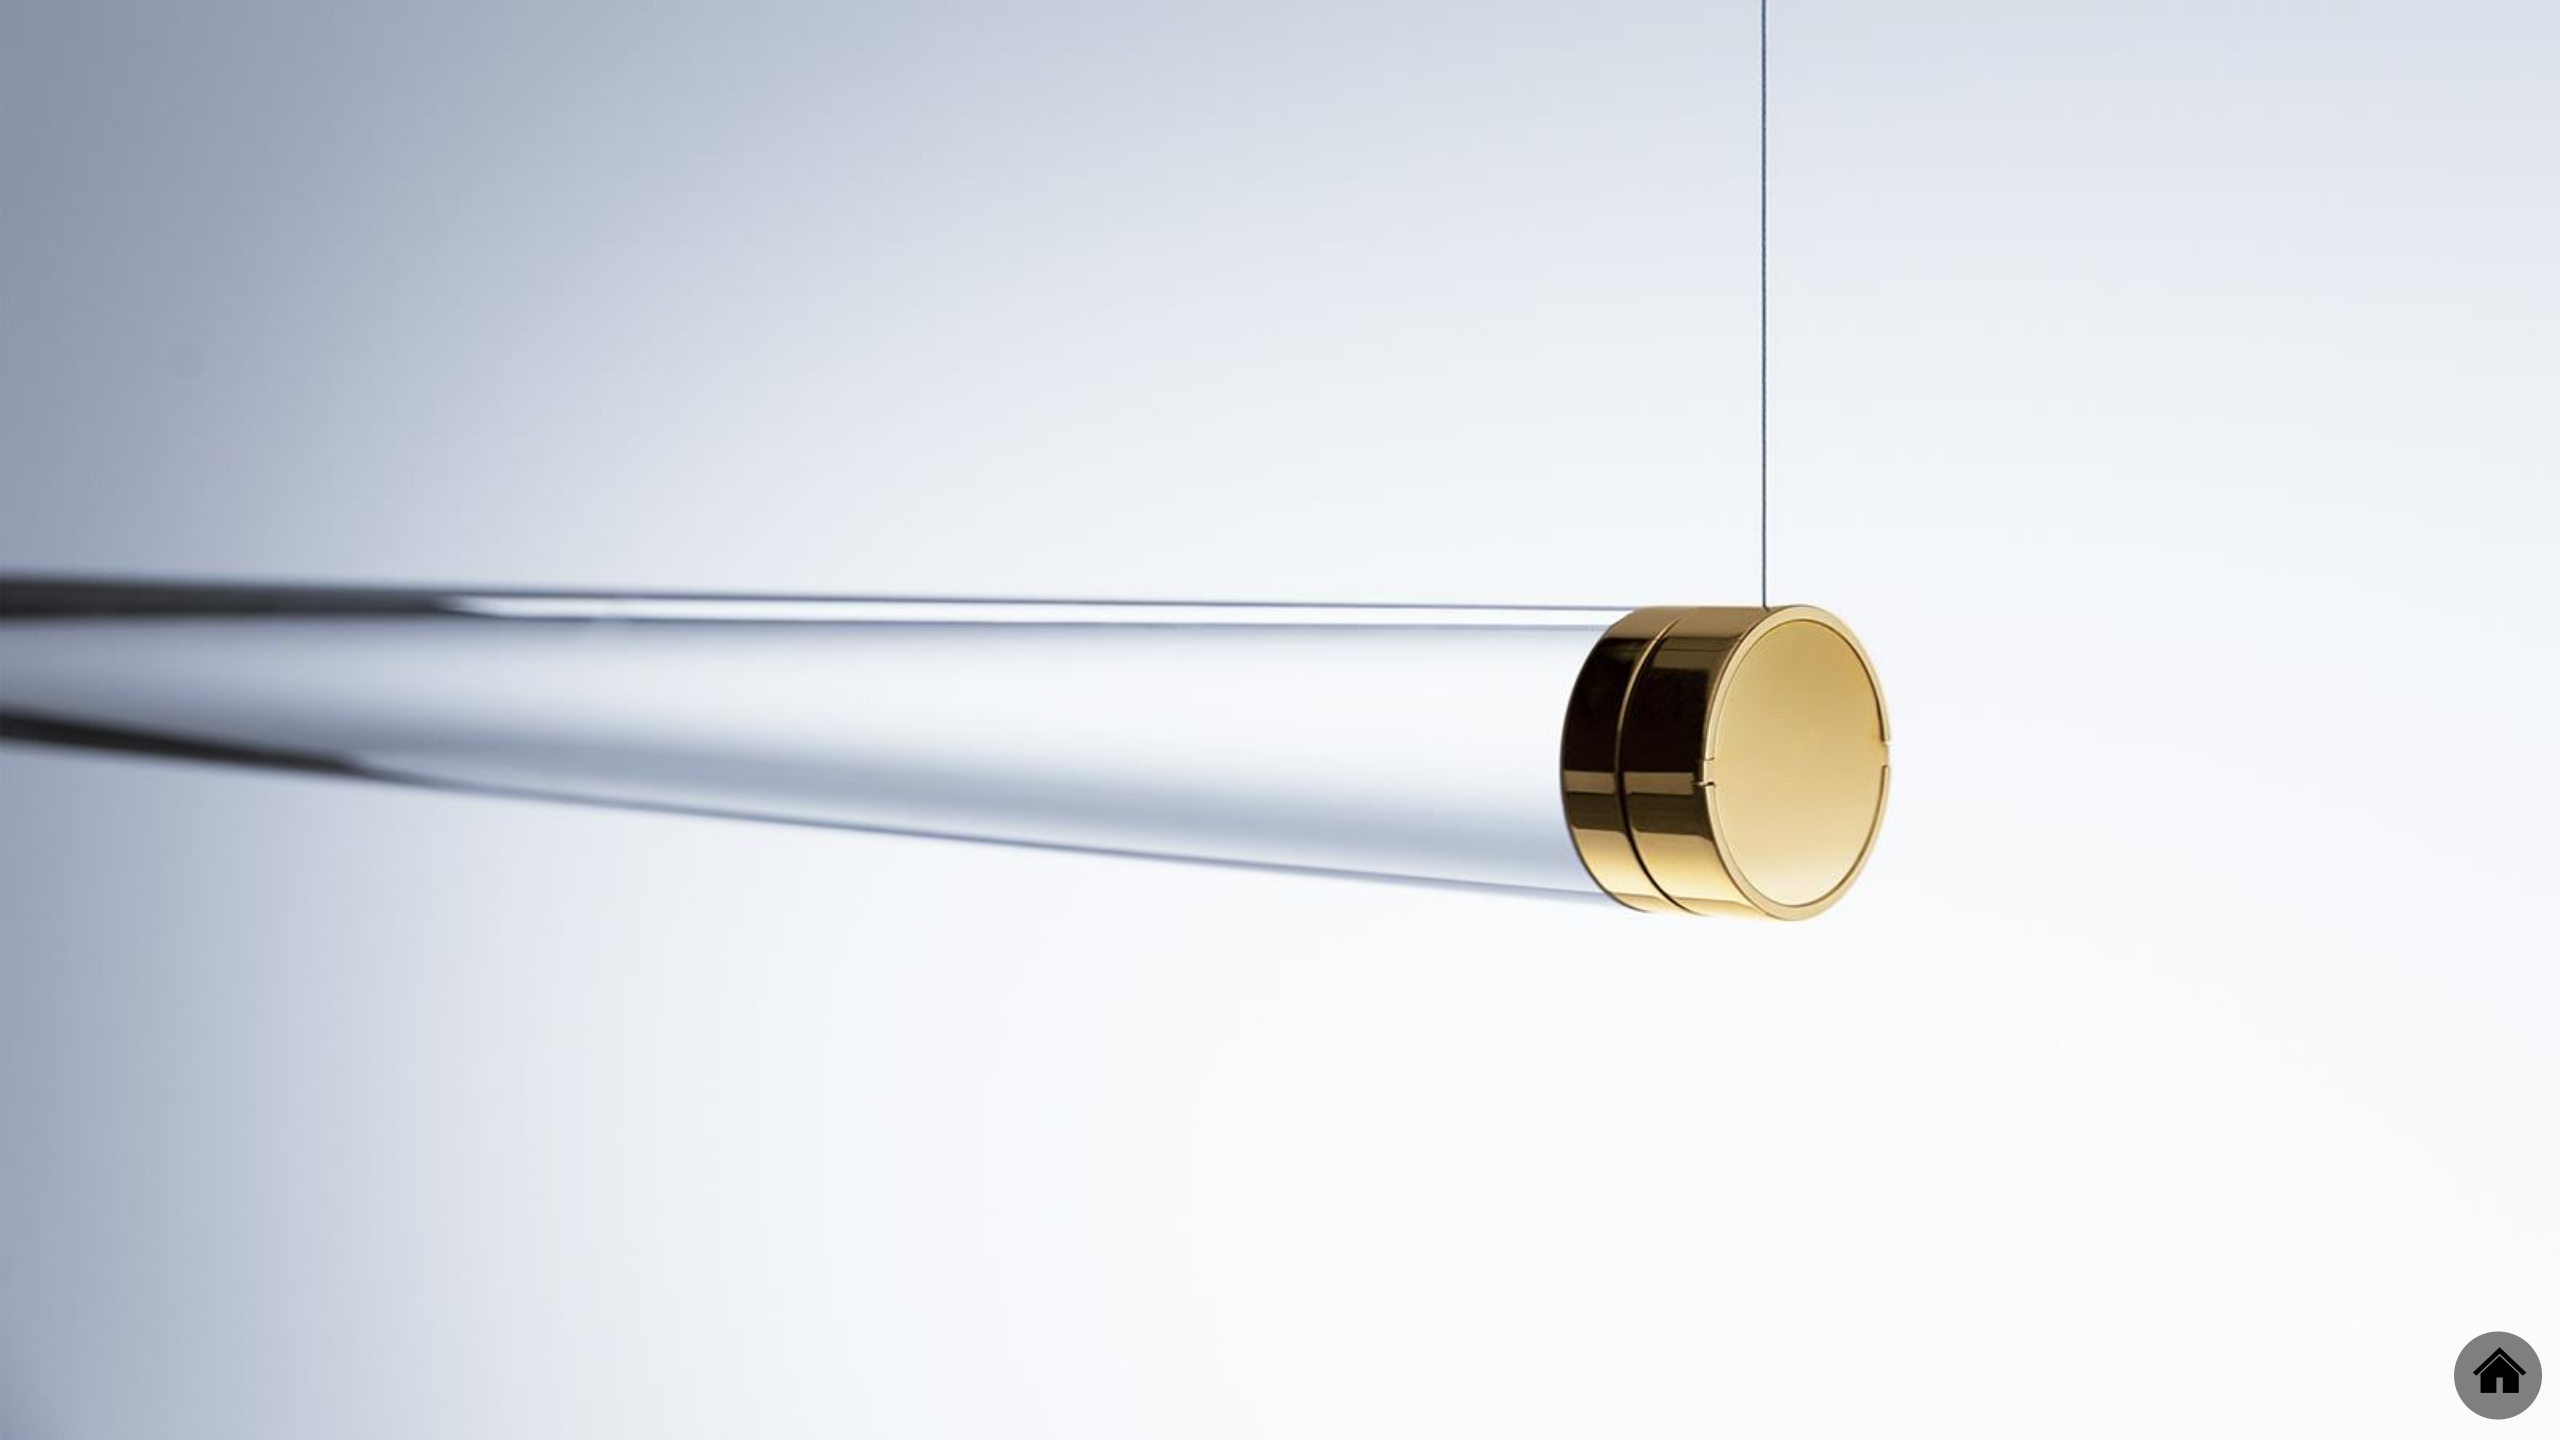

Suspension / Direct-Indirect / Indoor

**Material** Metal - PMMA

**Finish** **.19** Polished Gold **.28** Polished Black Chrome

**Note** Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose. Possibility for the luminaire to be powered by ENDLESS conductive tape and by dedicated voltage/current (Max 48V DC - Max 150W - Max 4A). See page: ENDLESS.

*Apparecchio illuminante a sospensione componibile. Orientabile lungo l'asse orizzontale. Barra trasparente con effetto rifrattivo. Profilo del modulo LED con finitura nero opaco. Dettagli con finitura oro lucido o cromo nero. Rosone bianco opaco. Alimentabile anche con il tape conduttivo ENDLESS e tensione/corrente dedicata (Max 48V DC - Max 150W - Max 4A). Vedi pagina ENDLESS.*




**MAGIA - MODULE**

19W

24V DC

2700K - 1272lm / 3000K - 1312lm

CRI >90

Driver not included

IP20

| | |
|---|---|
| Polished Gold - 2700K | 1A4721900.27.20 |
| Polished Gold - 3000K | 1A4721900.30.20 |
| Polished Black Chrome - 2700K | 1A4722800.27.20 |
| Polished Black Chrome - 3000K | 1A4722800.30.20 |

## Compulsory accessories / Accessori obbligatori

### Installation kits / Kit d'installazione

| Wire guide / Guidacavo | | | Not included |
|---|---|---|---|
| Matt Black | 1 Piece | 1A3040400.00.00 | |

| Unipolar wire - 6 m / Cavo unipolare - 6 m | | | Not included |
|---|---|---|---|
| | 1 Piece - Max 60V DC | Max 3 modules | 1A4730000.00.00 |

### Suspension kits / Kit di sospensione

| Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm | | | Not included |
|---|---|---|---|
| Matt White | For elettrical cables - 1 Piece<br>Plasterboard cut-out Ø 44 mm<br>Minimum space for mounting 70 mm | 1X0000300.02.00 | |
| Matt Black | For elettrical cables - 1 Piece<br>Plasterboard cut-out Ø 44 mm<br>Minimum space for mounting 70 mm | 1X0000400.02.00 | |

| Ceiling suspension kit / Kit di sospensione da soffitto | | | Not included |
|---|---|---|---|
| Matt White | For elettrical cables - 1 Piece | 1X0010300.02.00 | |
| Matt Black | For elettrical cables - 1 Piece | 1X0010400.02.00 | |





## Compulsory accessories / Accessori obbligatori

### Drivers / Alimentatori




| Ceiling driver / Driver da soffitto | | | Not included |
|---|---|---|---|
| Matt White | Input 220-240V - 50/60Hz<br>Output 24V - 21W - IP20<br>DALI - PUSH - 1-10V - TRIAC | Max 1 module | 1A4780300.00.05 |




| Ceiling driver / Driver da soffitto | | | Not included |
|---|---|---|---|
| Matt White | Input 120-240V - 50/60Hz<br>Output 24V - 60W - IP20<br>DALI - PUSH - 1-10V - TRIAC | Max 3 modules | 1A4740300.00.05 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 100-240V | 24V/50W/IP20/ON/OFF | Max 1 module | 1Z1120490 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 100-240V | 24V/80W/IP20/ON/OFF | Max 3 modules | 1Z1120440 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 100-240V | 24V/150W/IP67/1-10V | Max 6 modules | 1Z1120500 |




| Controller | | | Not included |
|---|---|---|---|
| | DALI - PUSH - 0/1-10V - TRIAC - IP20 | | 1Z2170010 |

## Optional accessories / Accessori opzionali

### Suspension kits / Kit di sospensione




| Wall adapter plate / Piastra di adattamento da parete | | | Not included |
|---|---|---|---|
| Matt White | For mounting on brick masonry walls | 1X0050300.01.00 | |

# FIXING KIT

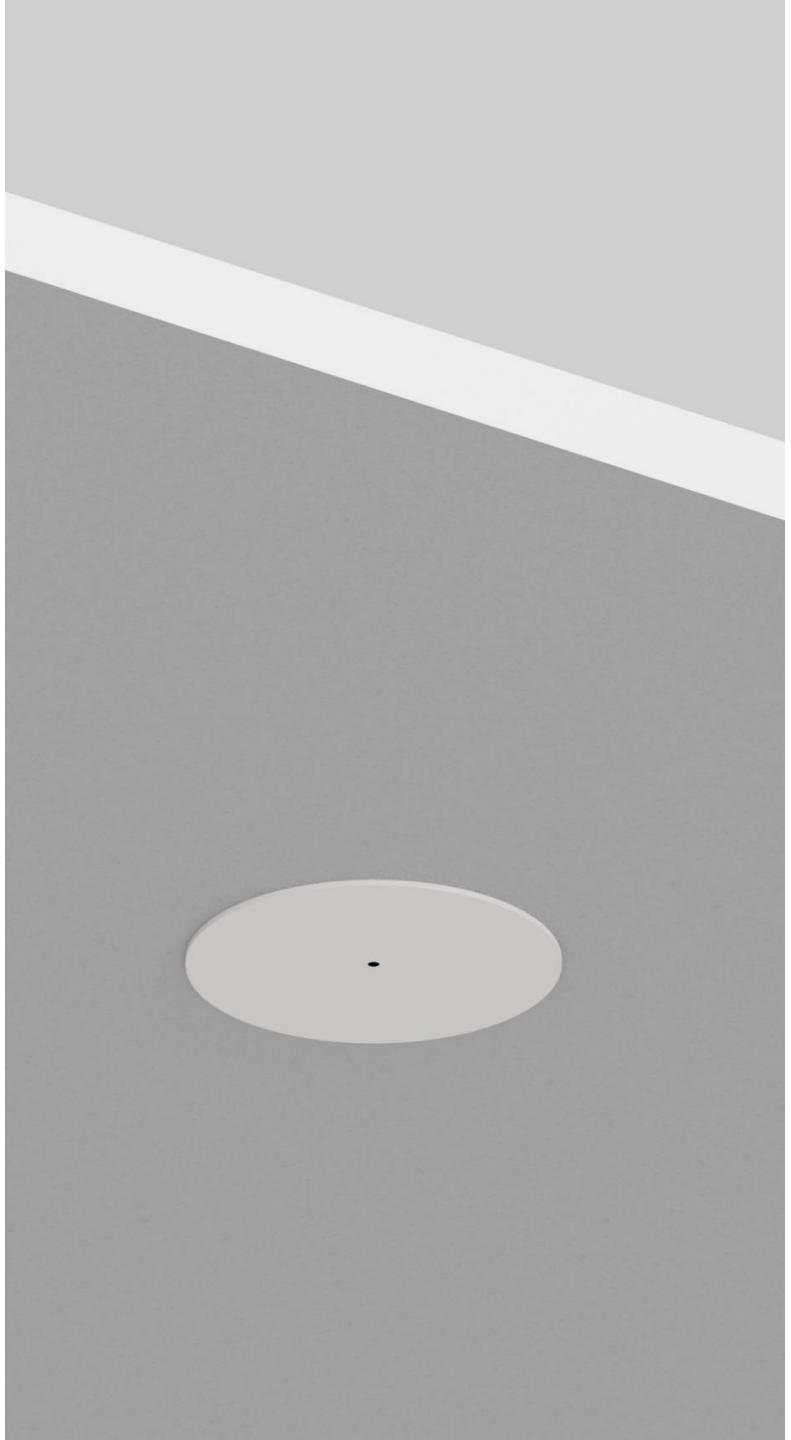

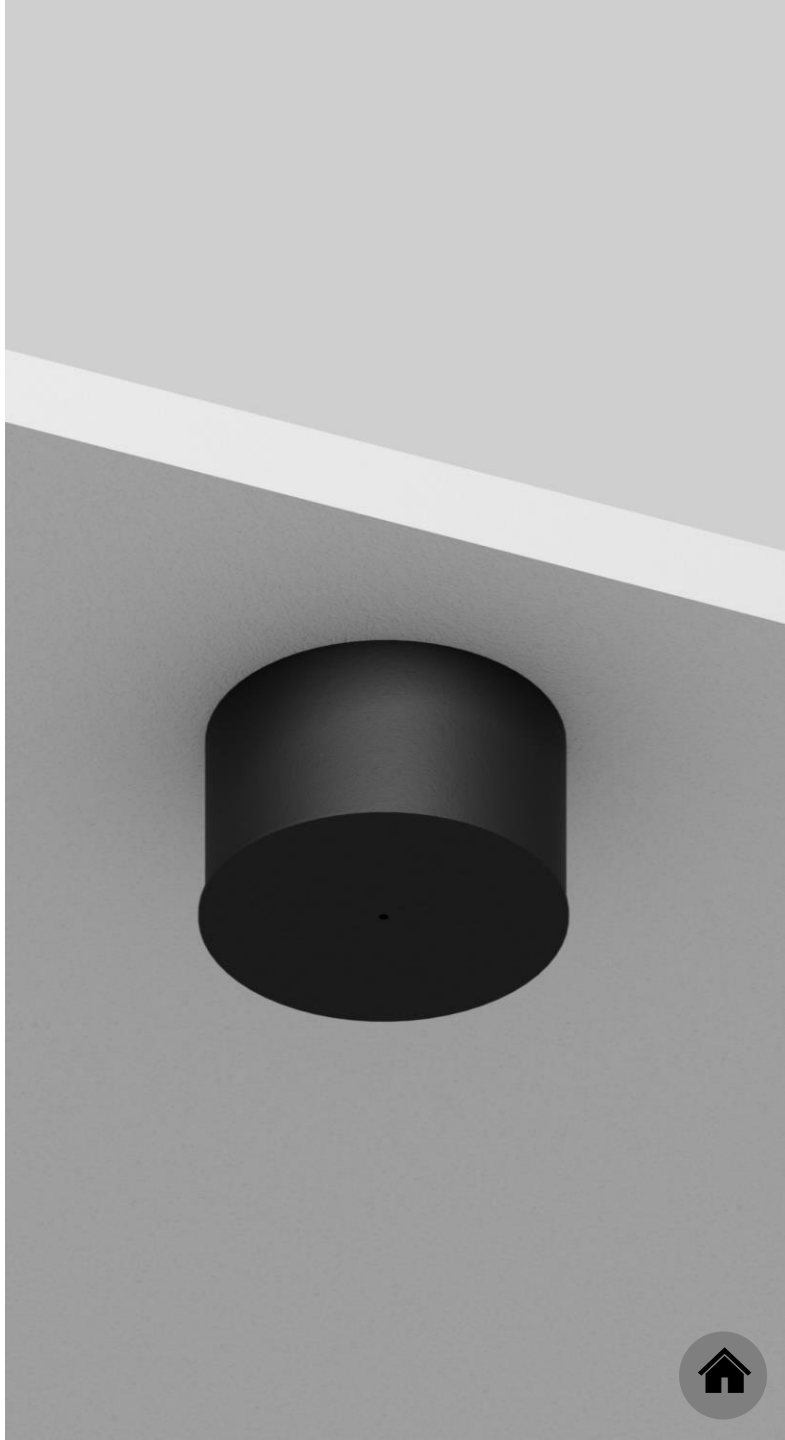

# FIXING KIT

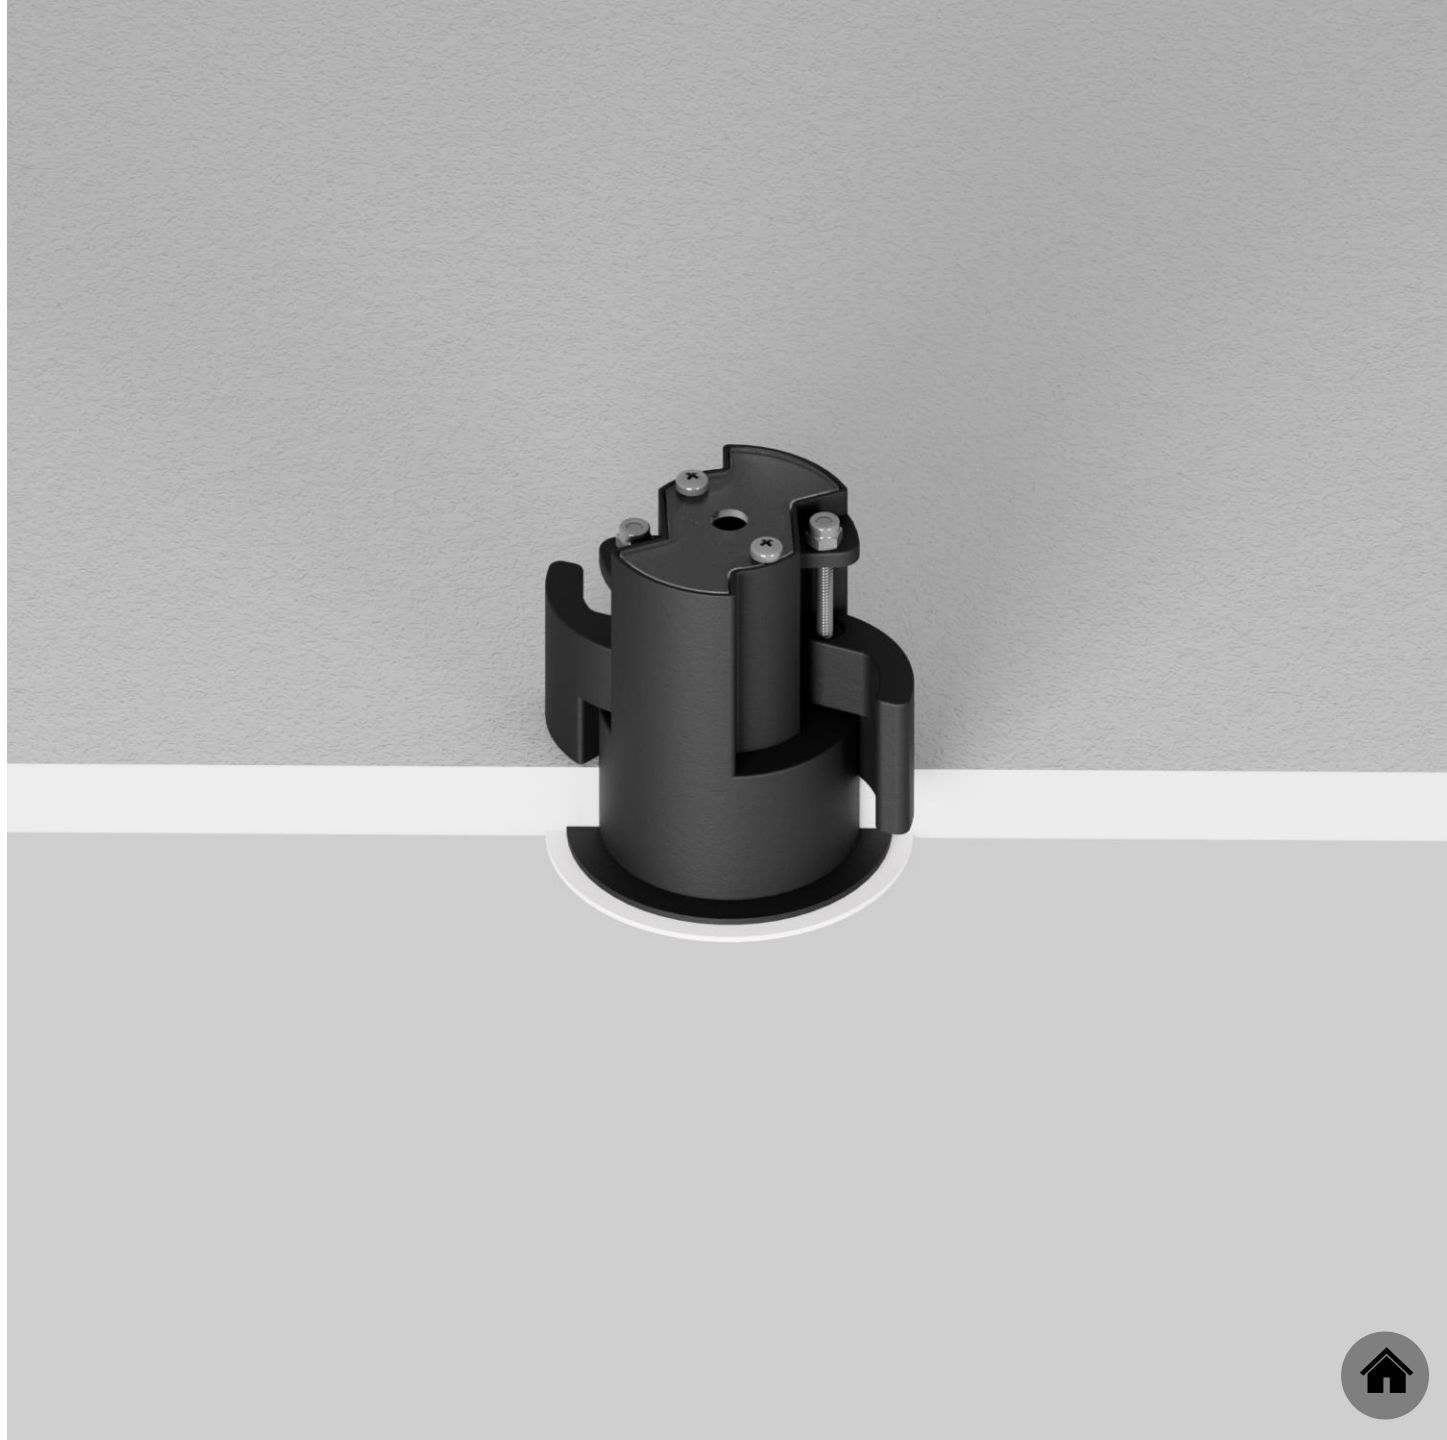

# FIXING KIT

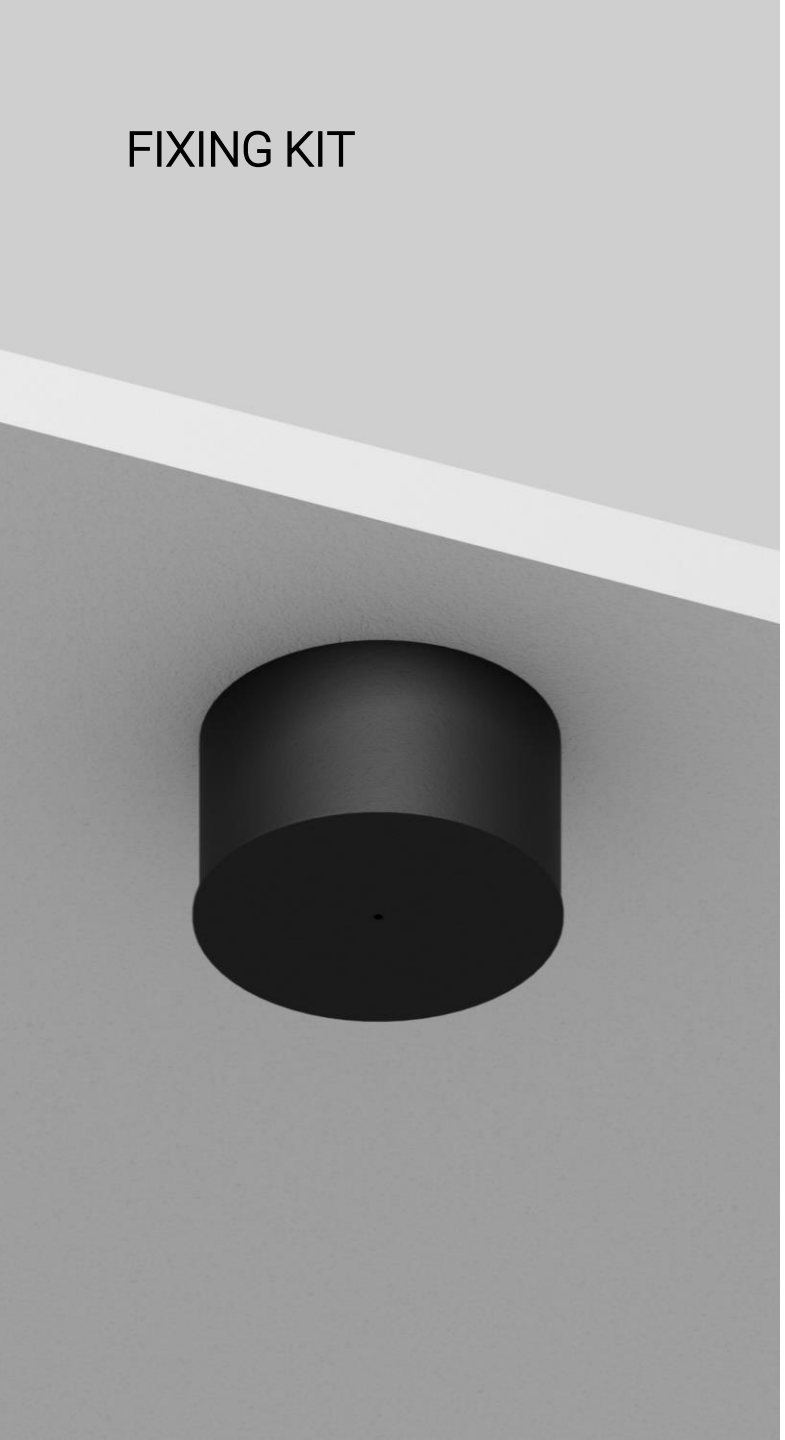

**Single installation with ceiling driver**

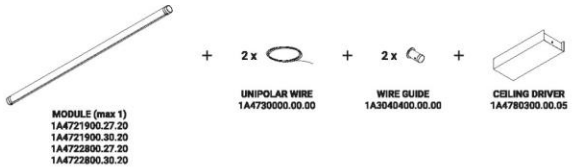


**Multiple installation with ceiling driver**

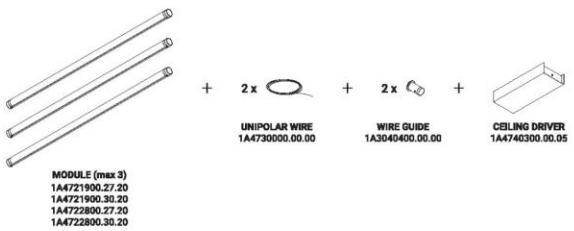






**Single installation with recessed or ceiling suspension kit**

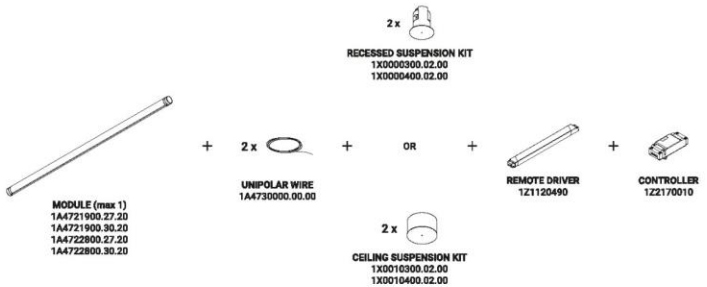


**Multiple installation with recessed or ceiling suspension kit**

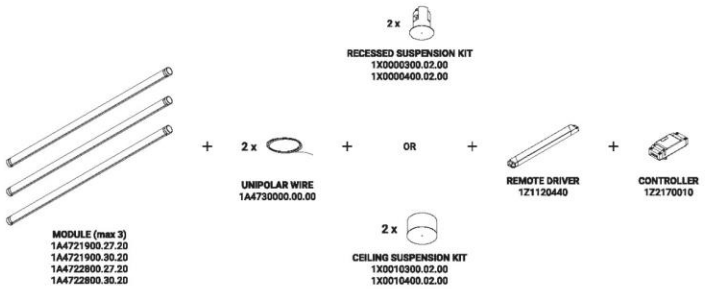

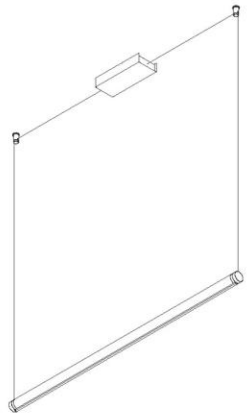

Example of single installation with ceiling driver

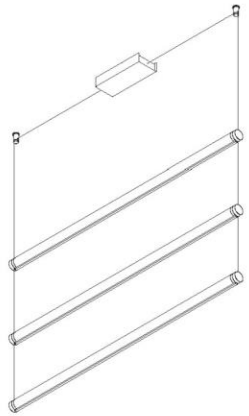

Example of multiple installation with ceiling driver





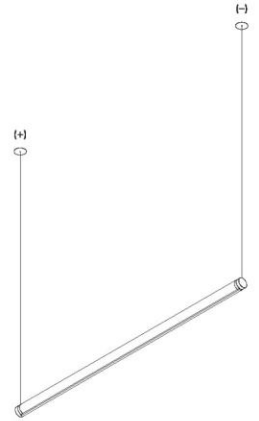


Example of single installation with recessed suspension kit

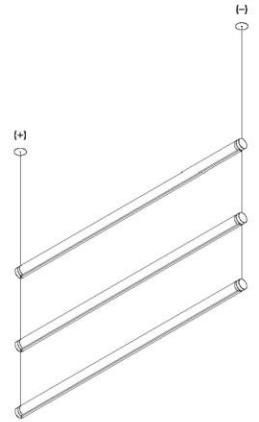


Example of multiple installation with recessed suspension kit

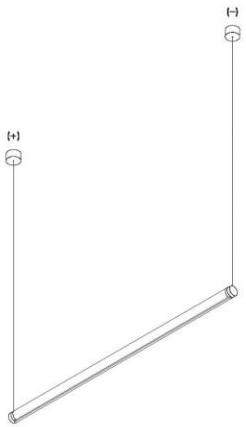


Example of single installation with ceiling suspension kit

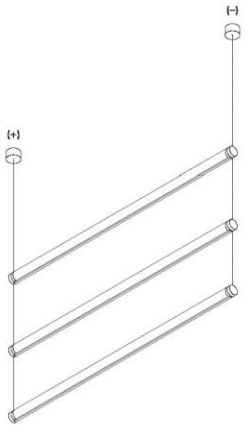


Example of multiple installation with ceiling suspension kit





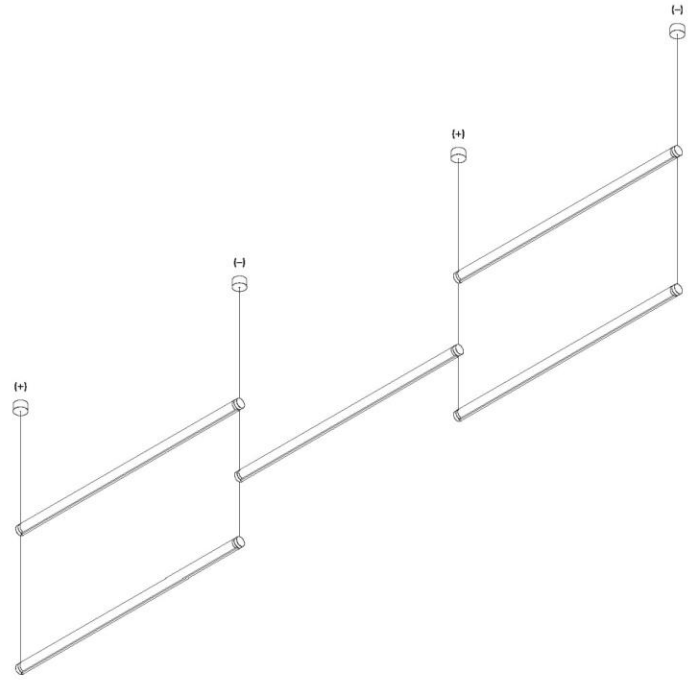


Example of multiple installation | **Max 3 modules for cable**

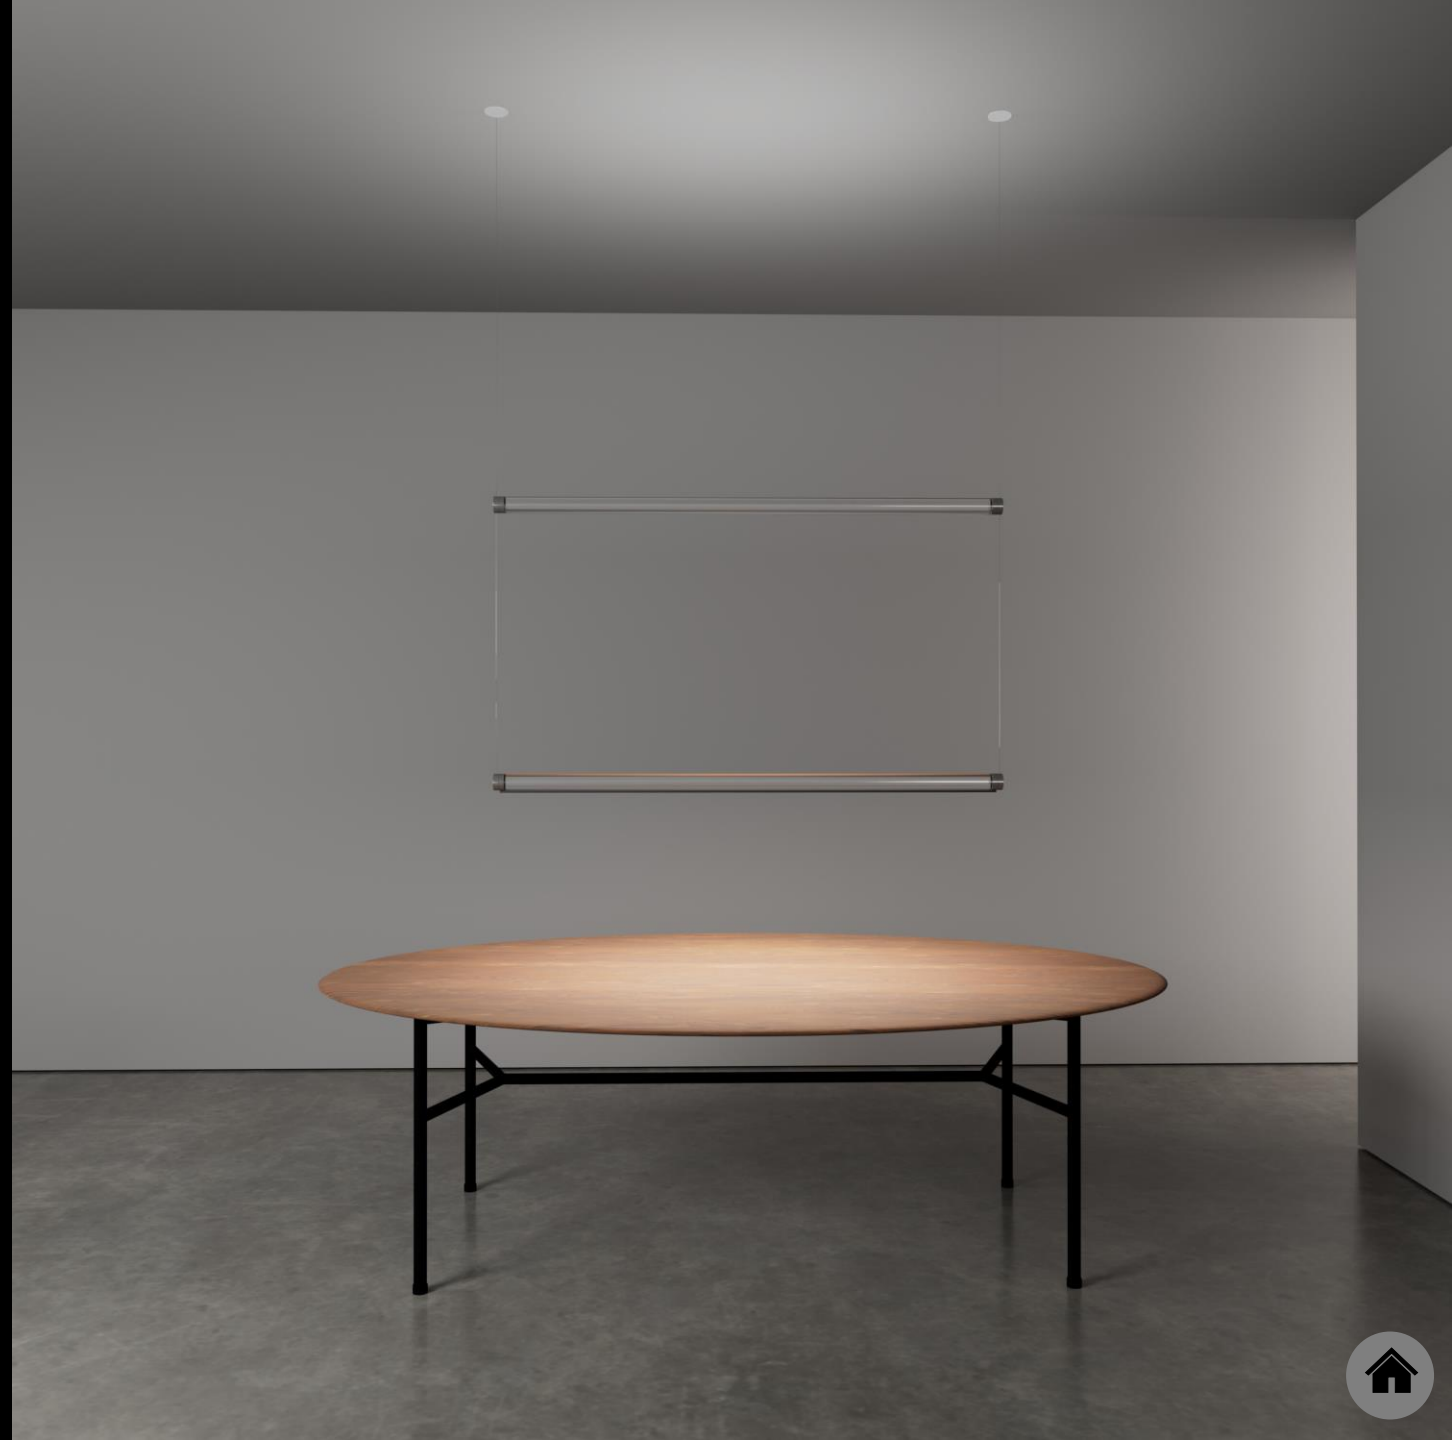

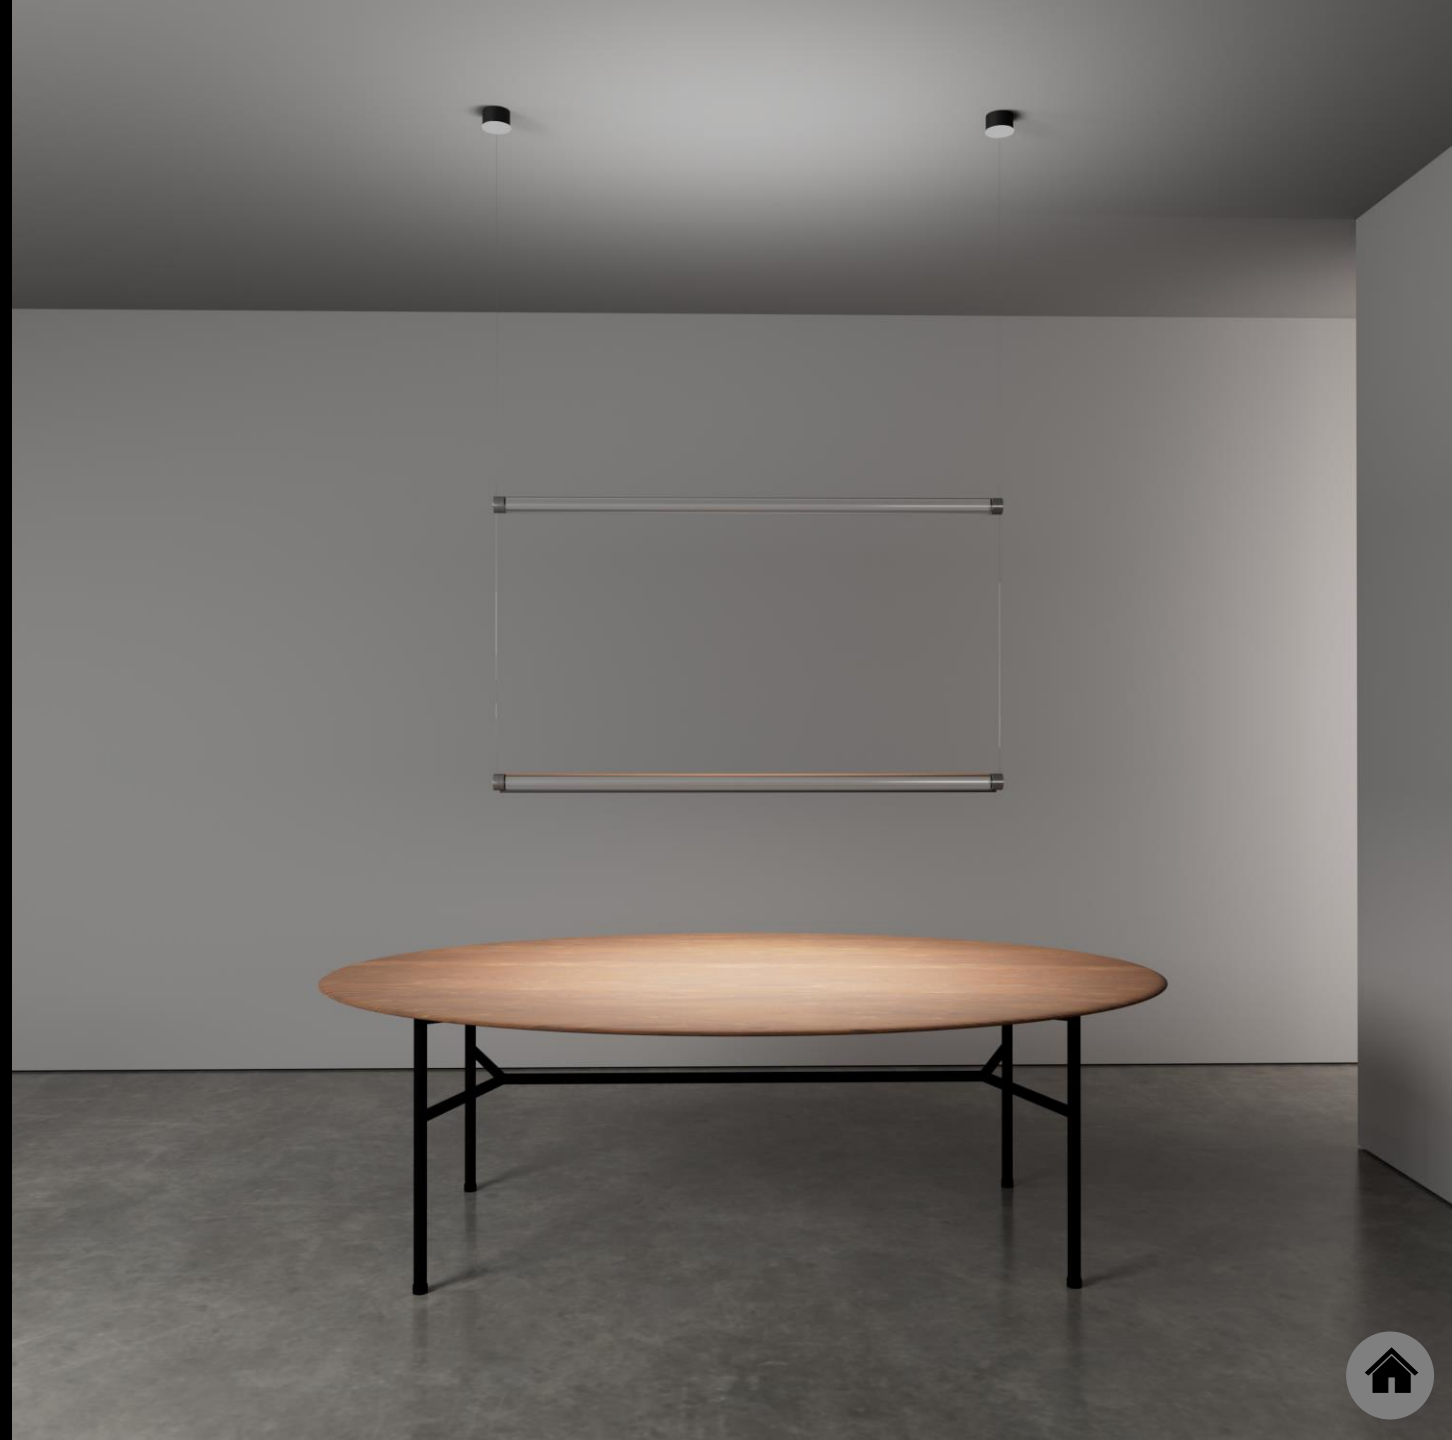

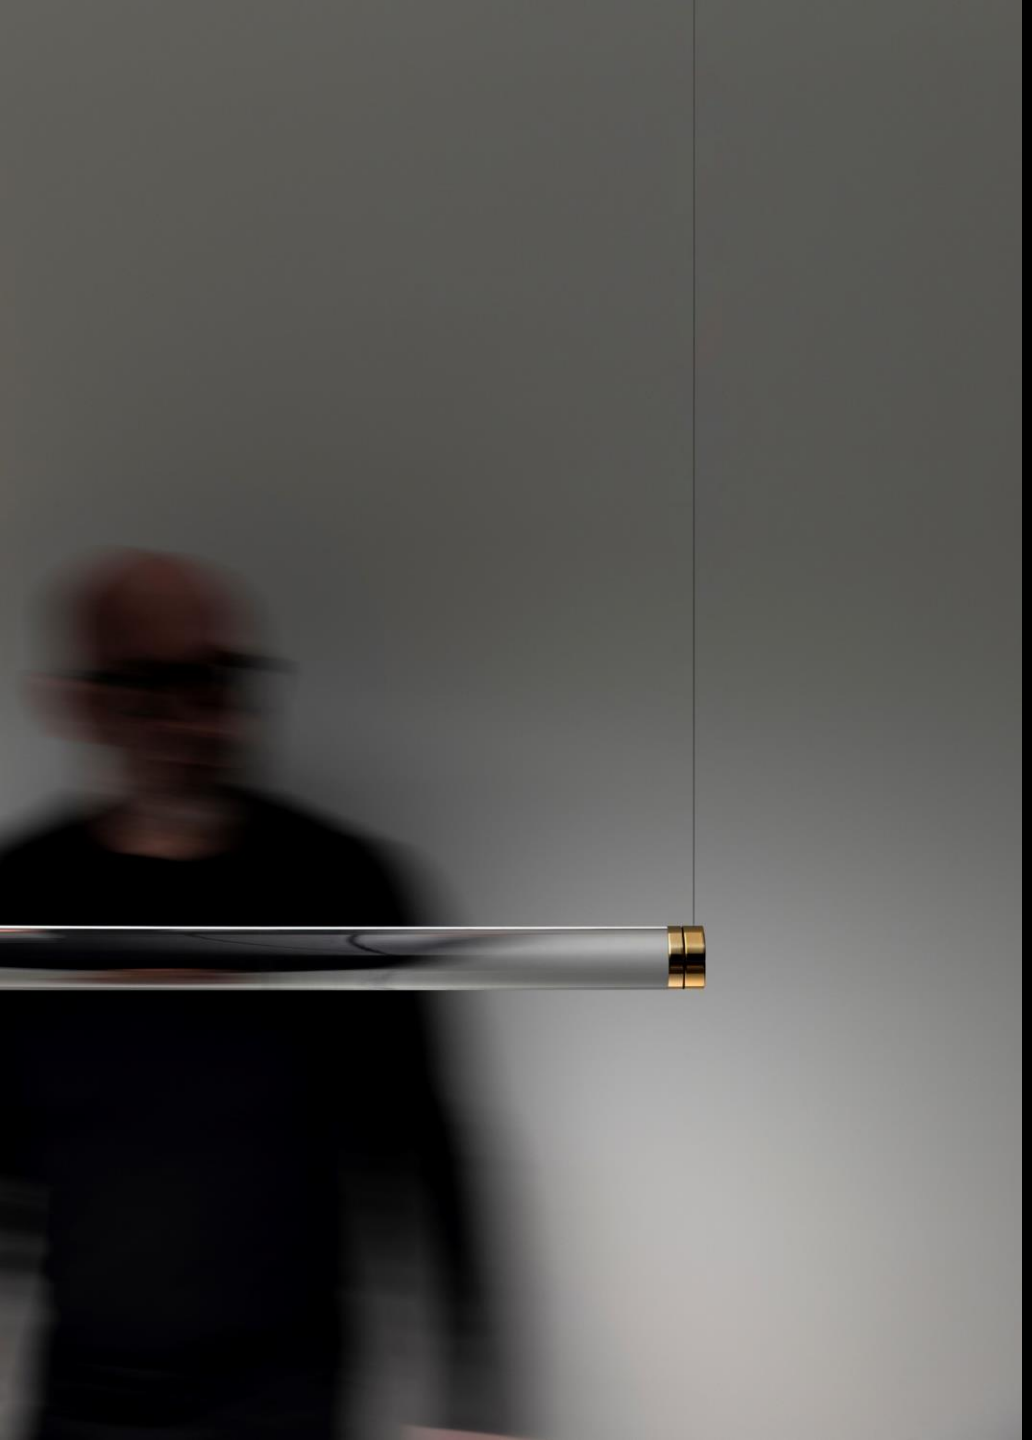

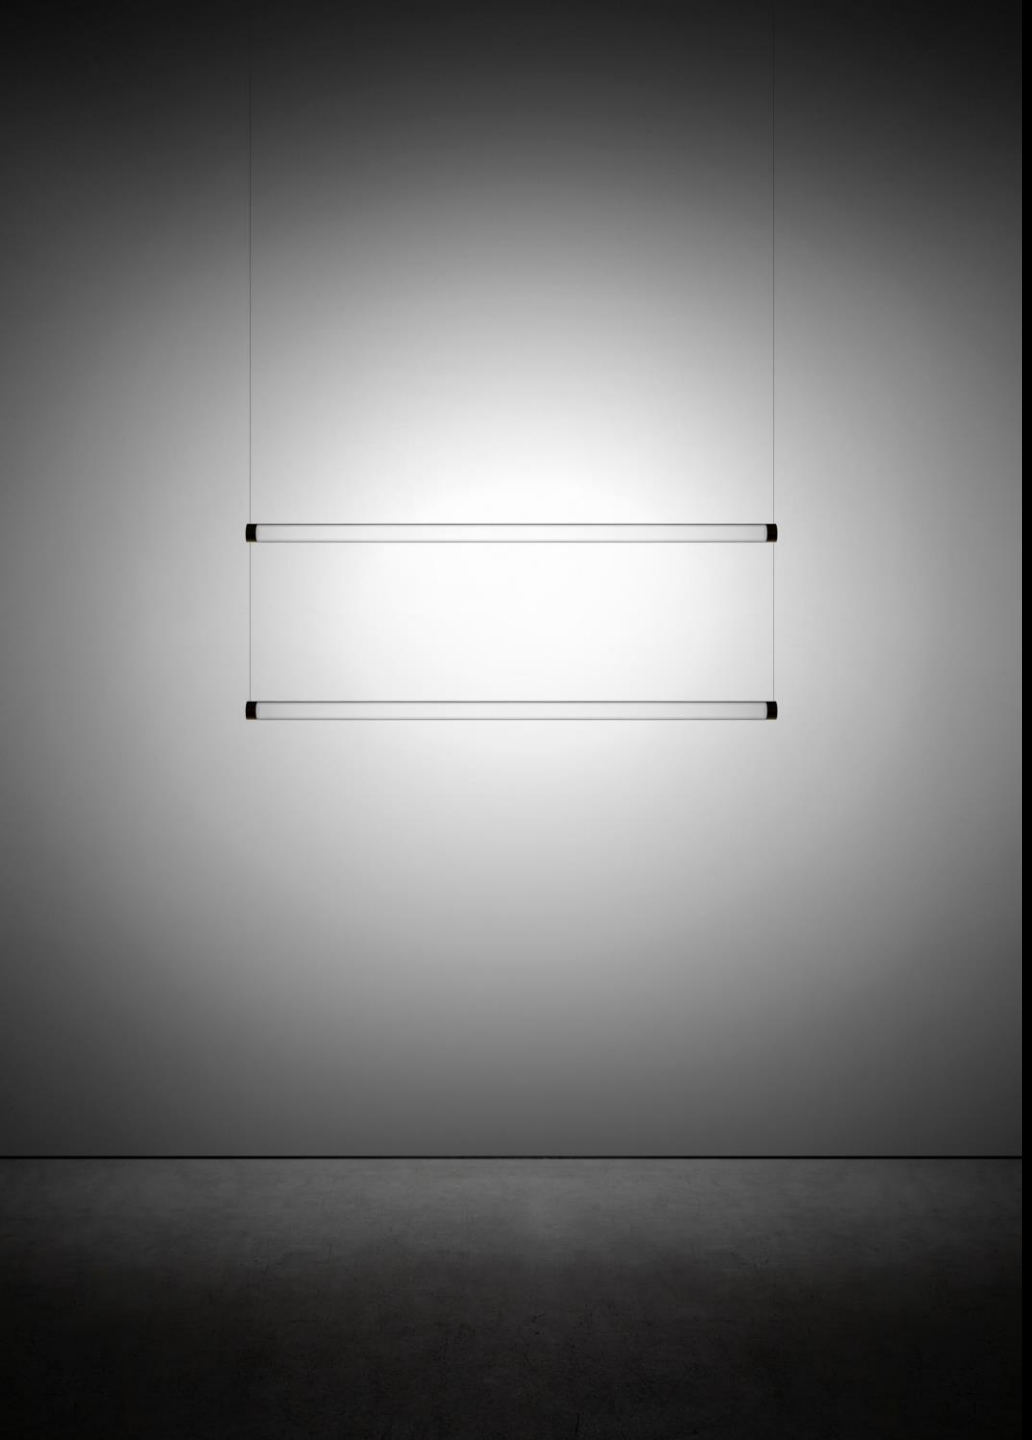

# ASINTOTO

Design Davide Groppi – 2023

Abstraction, purity, graphic sign.
The projected reduction of Infinito.
The disc appears enigmatic, the symbolic presence of the absence of light.

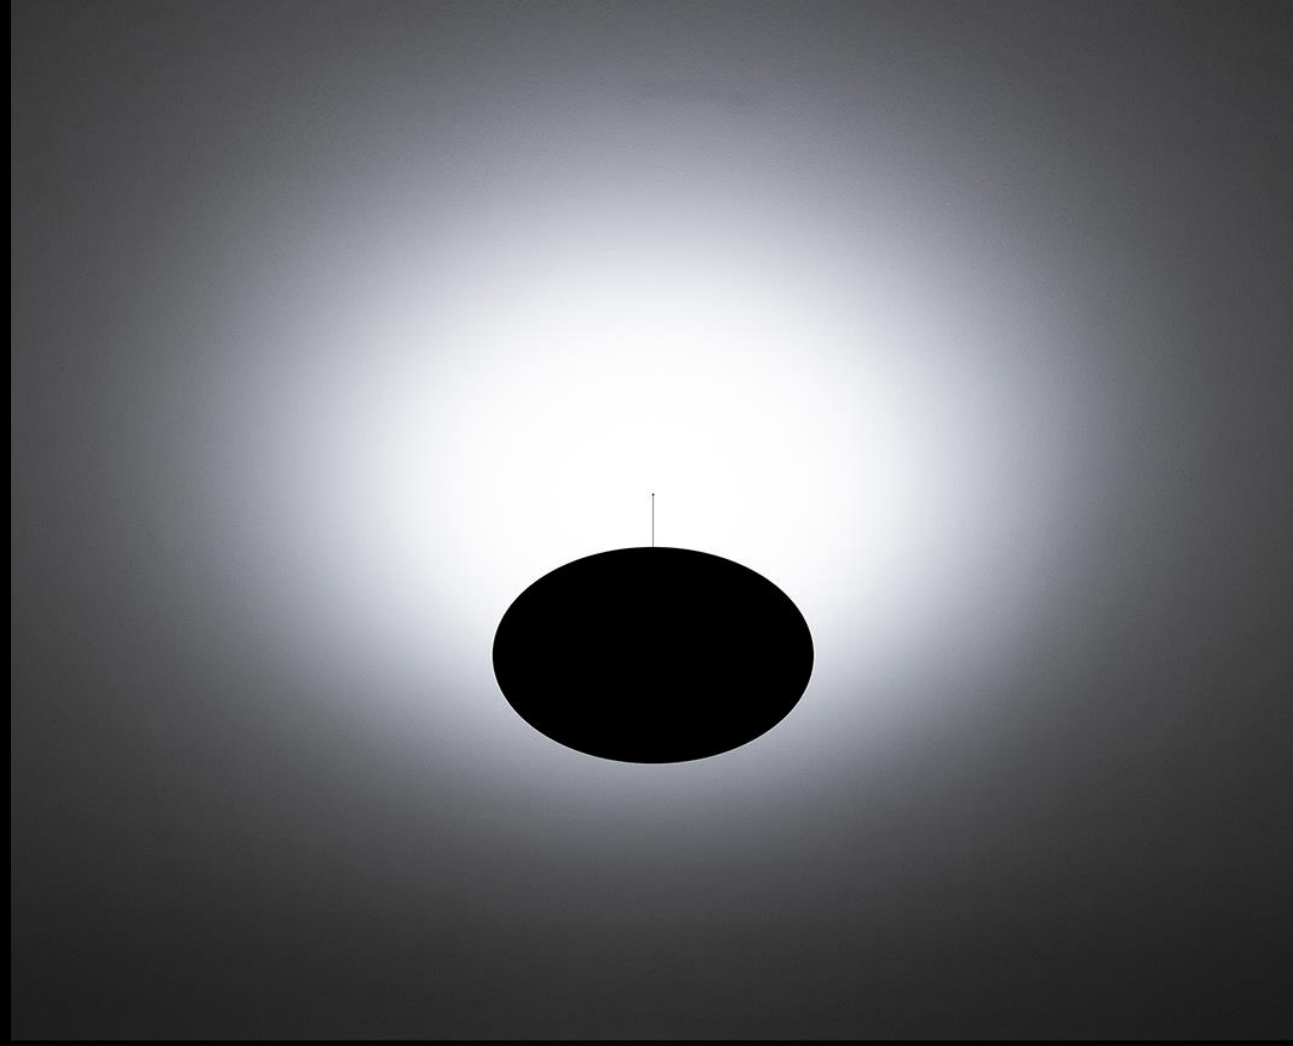

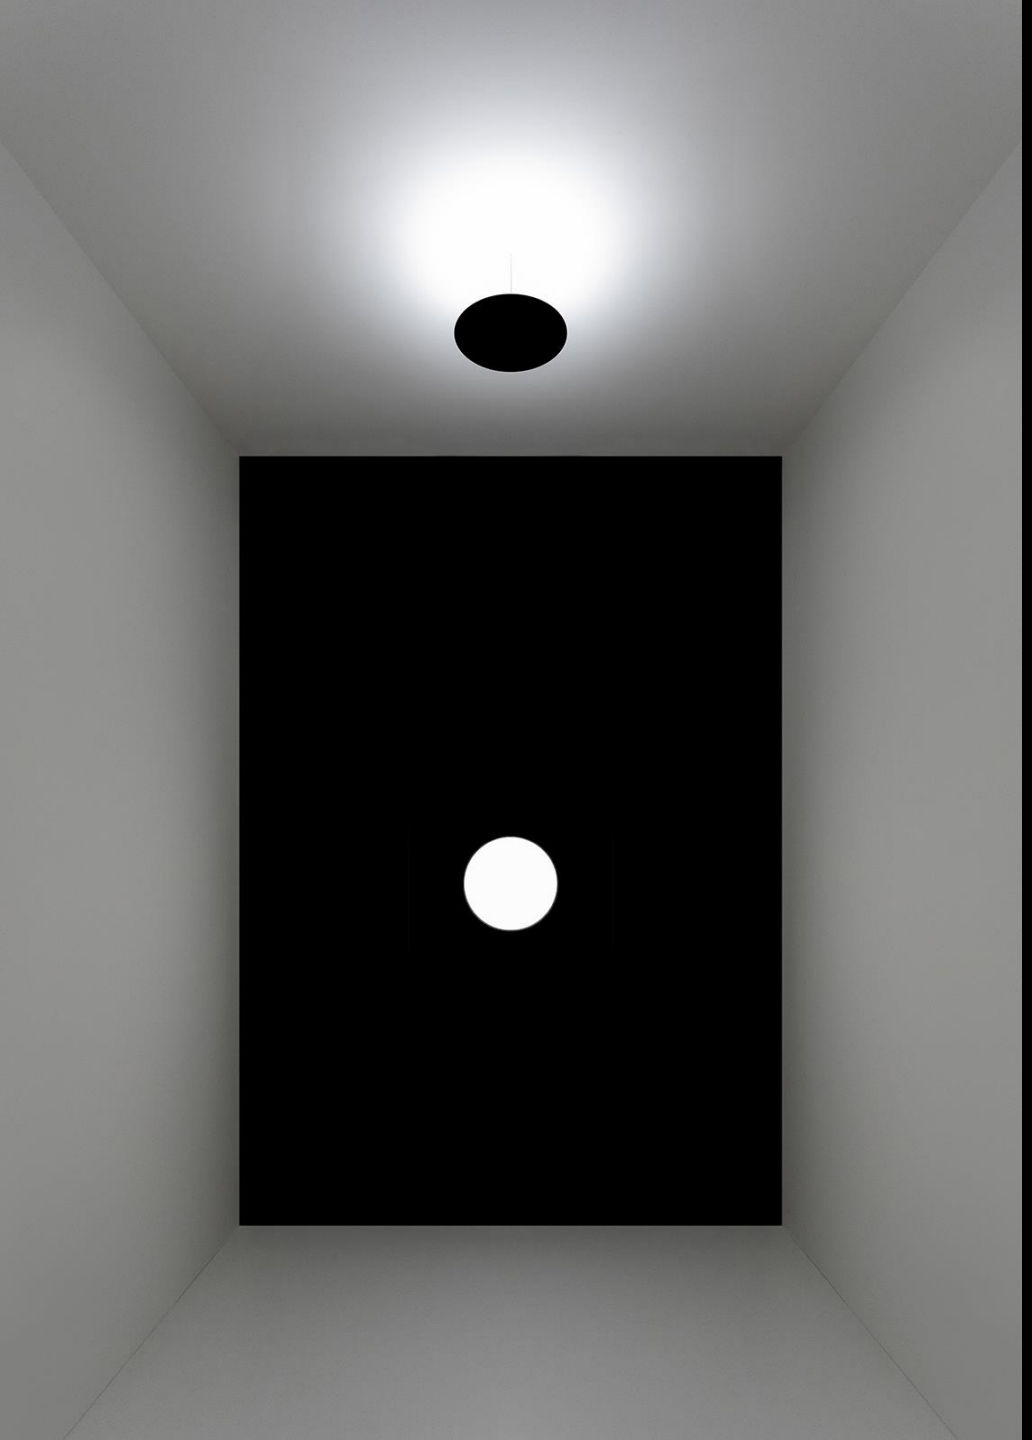

# ASINTOTO

Davide Groppi / 2023

Ceiling / Indirect / Indoor

**Material** Metal - Methacrylate

**Finish** **.27** Gravity Black

**Note** Ceiling luminaire. Disc with gravity black finish. Magnetic weight available for disc tilting. Black cable.

*Apparecchio illuminante da soffitto. Disco con finitura gravity black. Disponibile un peso magnetico per l'orientamento inclinato del disco. Cavo nero.*




**ASINTOTO**
18W
Max 500mA DC
2700K - 1435lm / 3000K - 1478lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Gravity Black - 2700K | 1A4072700.27.20 |
| Gravity Black - 3000K | 1A4072700.30.20 |

## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 500mA/20W(15W)/IP20/DALI | 1Z0241180.500 | |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 500mA/20W(15W)/IP20/PUSH - 1-10V | 1Z0240870.500 | |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V | 500mA/20W/IP20/TRIAC/IGBT | 1Z0240850.500 | |





## Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**




| Circular plasterboard panel 12,5 mm / Botola circolare per cartongesso 12,5 mm | | | Not included |
|---|---|---|---|
| Standard | Cut-out 400x400 mm<br>Minimum space for mounting Ø 115 mm | 1A4520000.00.00 | |

**Suspension kits / Kit di sospensione**

| Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm | | | Not included |
|---|---|---|---|
| Matt White | For elettrical cables - 1 Piece<br>Plasterboard cut-out Ø 44 mm<br>Minimum space for mounting 70 mm | 1X0000300.04.00 | |
| Matt Black | For elettrical cables - 1 Piece<br>Plasterboard cut-out Ø 44 mm<br>Minimum space for mounting 70 mm | 1X0000400.04.00 | |

| Ceiling suspension kit / Kit di sospensione da soffitto | | | Not included |
|---|---|---|---|
| Matt White | For elettrical cables - 1 Piece | 1X0010300.04.00 | |
| Matt Black | For elettrical cables - 1 Piece | 1X0010400.04.00 | |




| Wall adapter plate / Piastra di adattamento da parete | | | Not included |
|---|---|---|---|
| Matt White | For mounting on brick masonry walls | 1X0050300.01.00 | |

**Other accessories / Altri accessori**

| Magnetic weight / Peso magnetico | | | Not included |
|---|---|---|---|
| Matt Black | For sloped installation | 1A4710400.00.00 | |

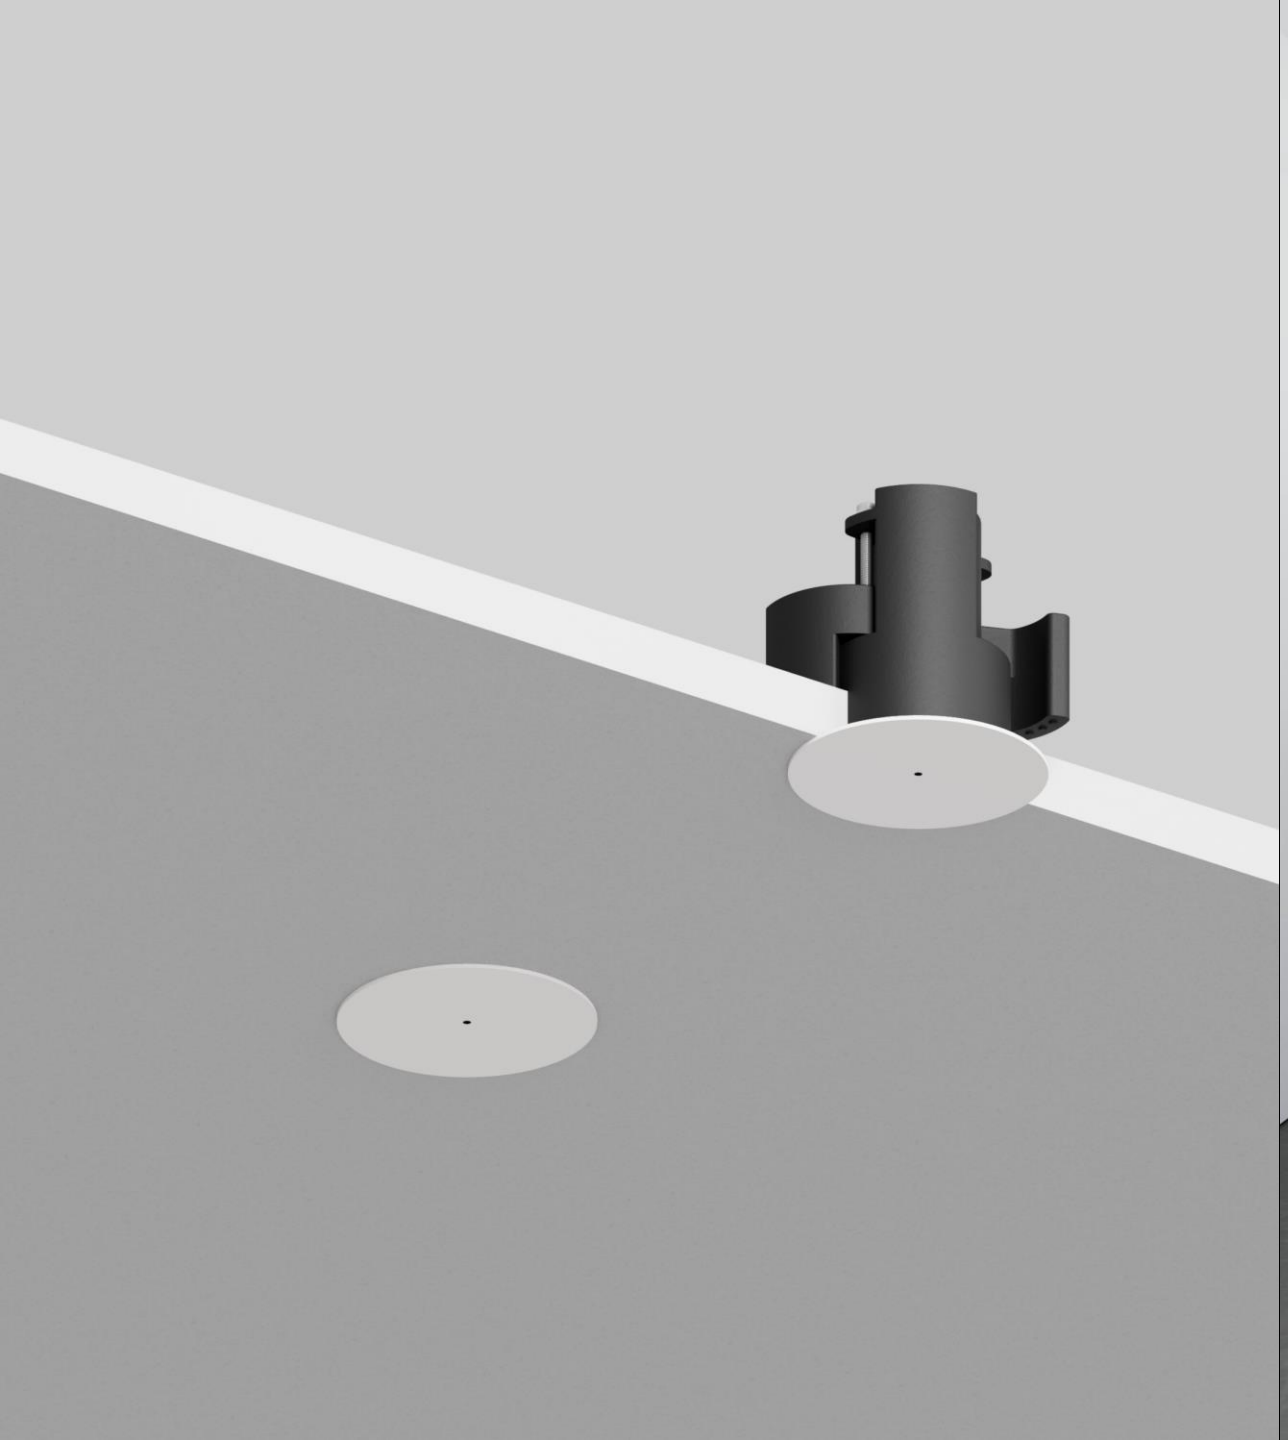

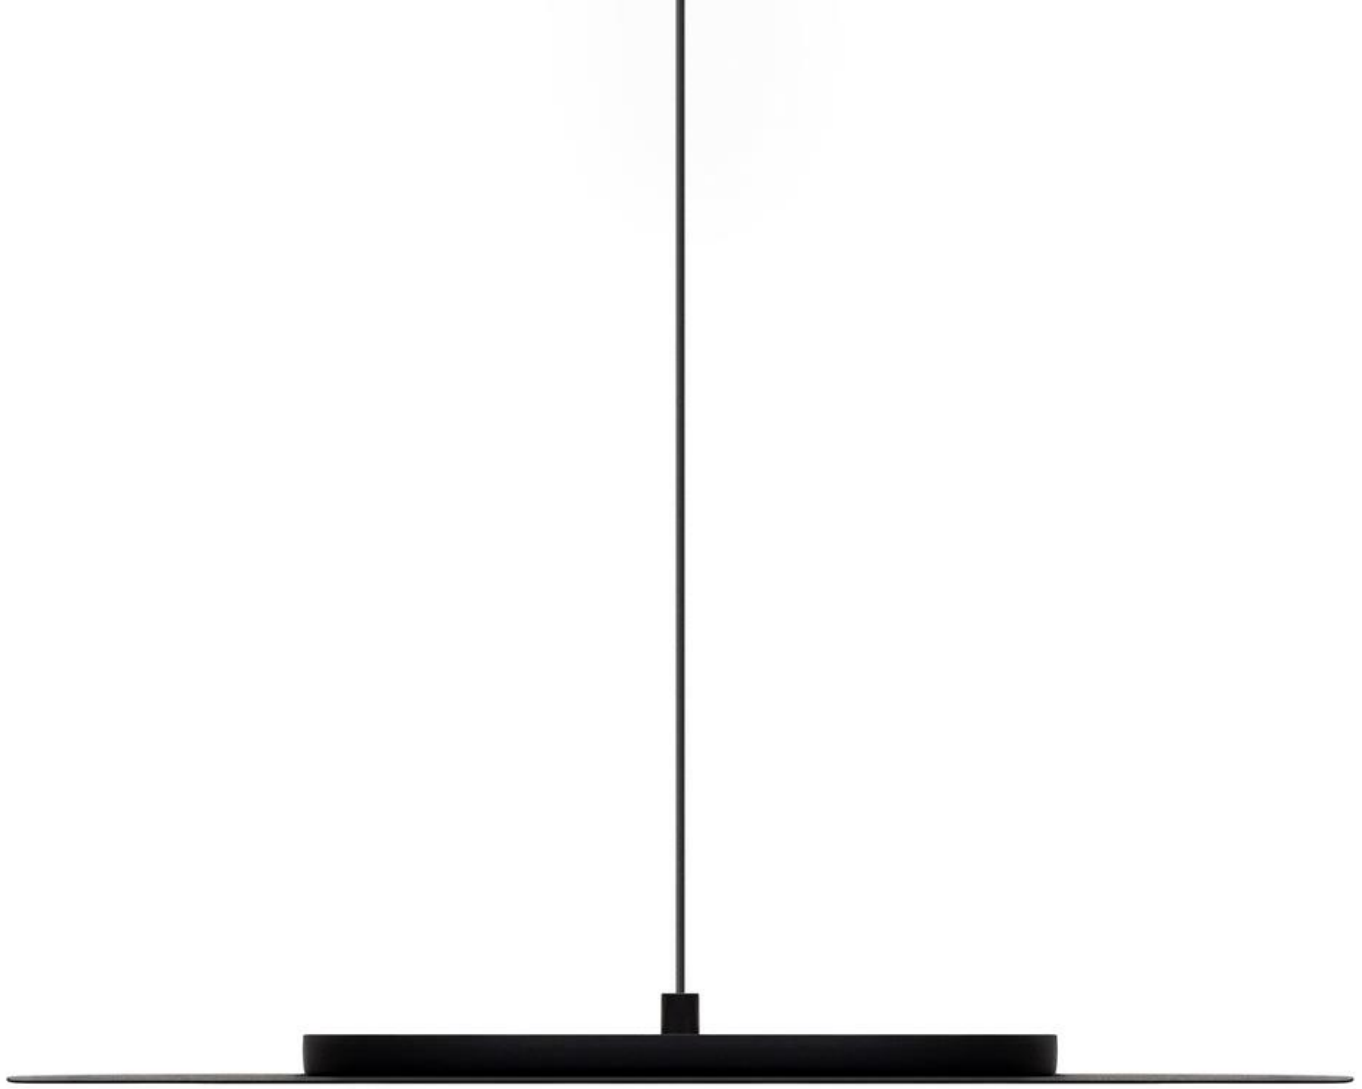

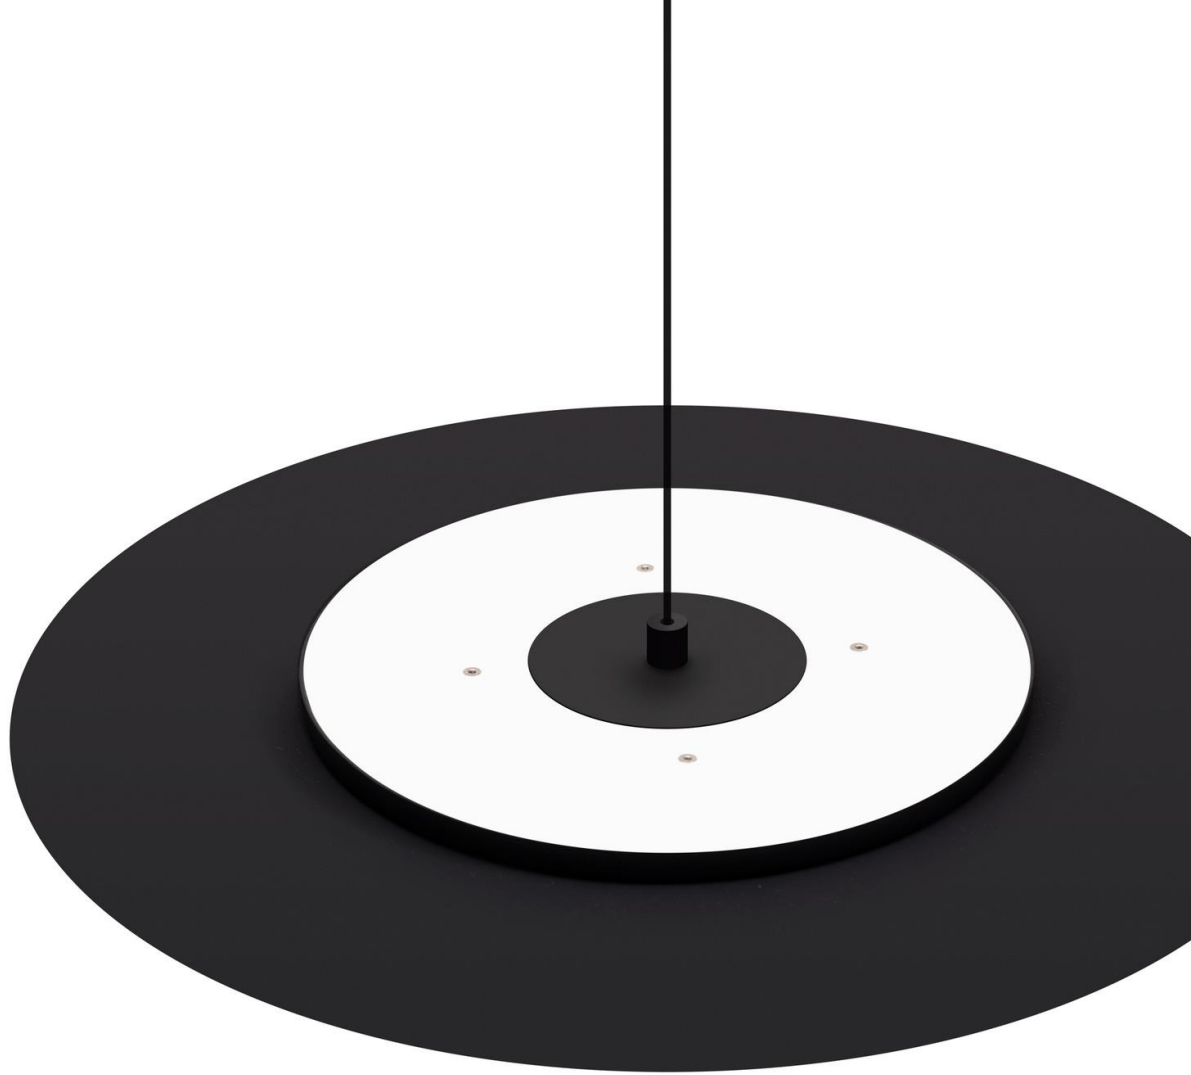

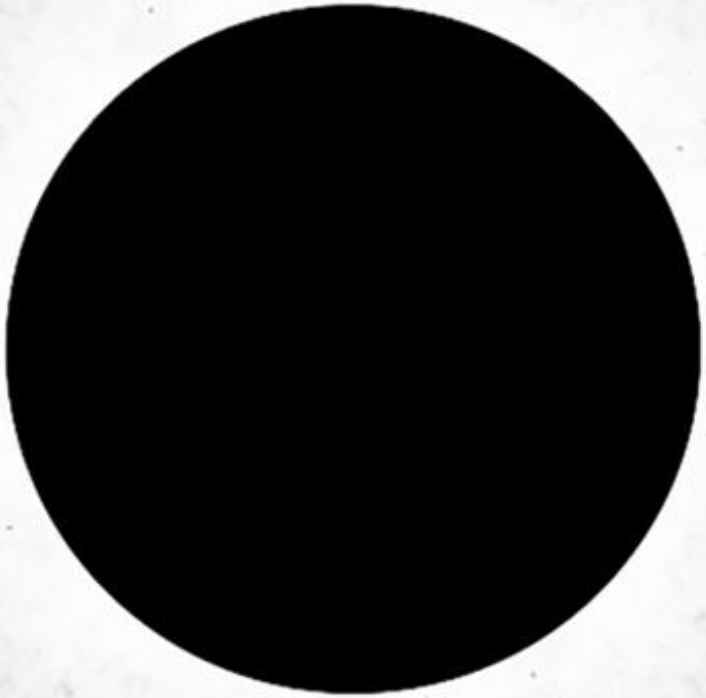

# AURORA

Design Davide Groppi – 2023

A white disc, the perfect representation of diffused light.
It can be mounted on the wall or ceiling, with modular brightness.

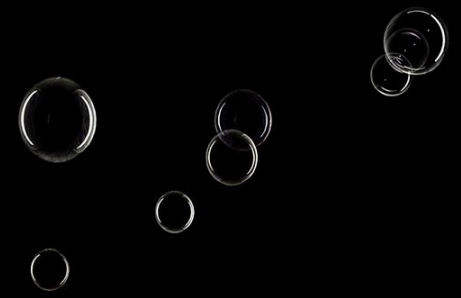

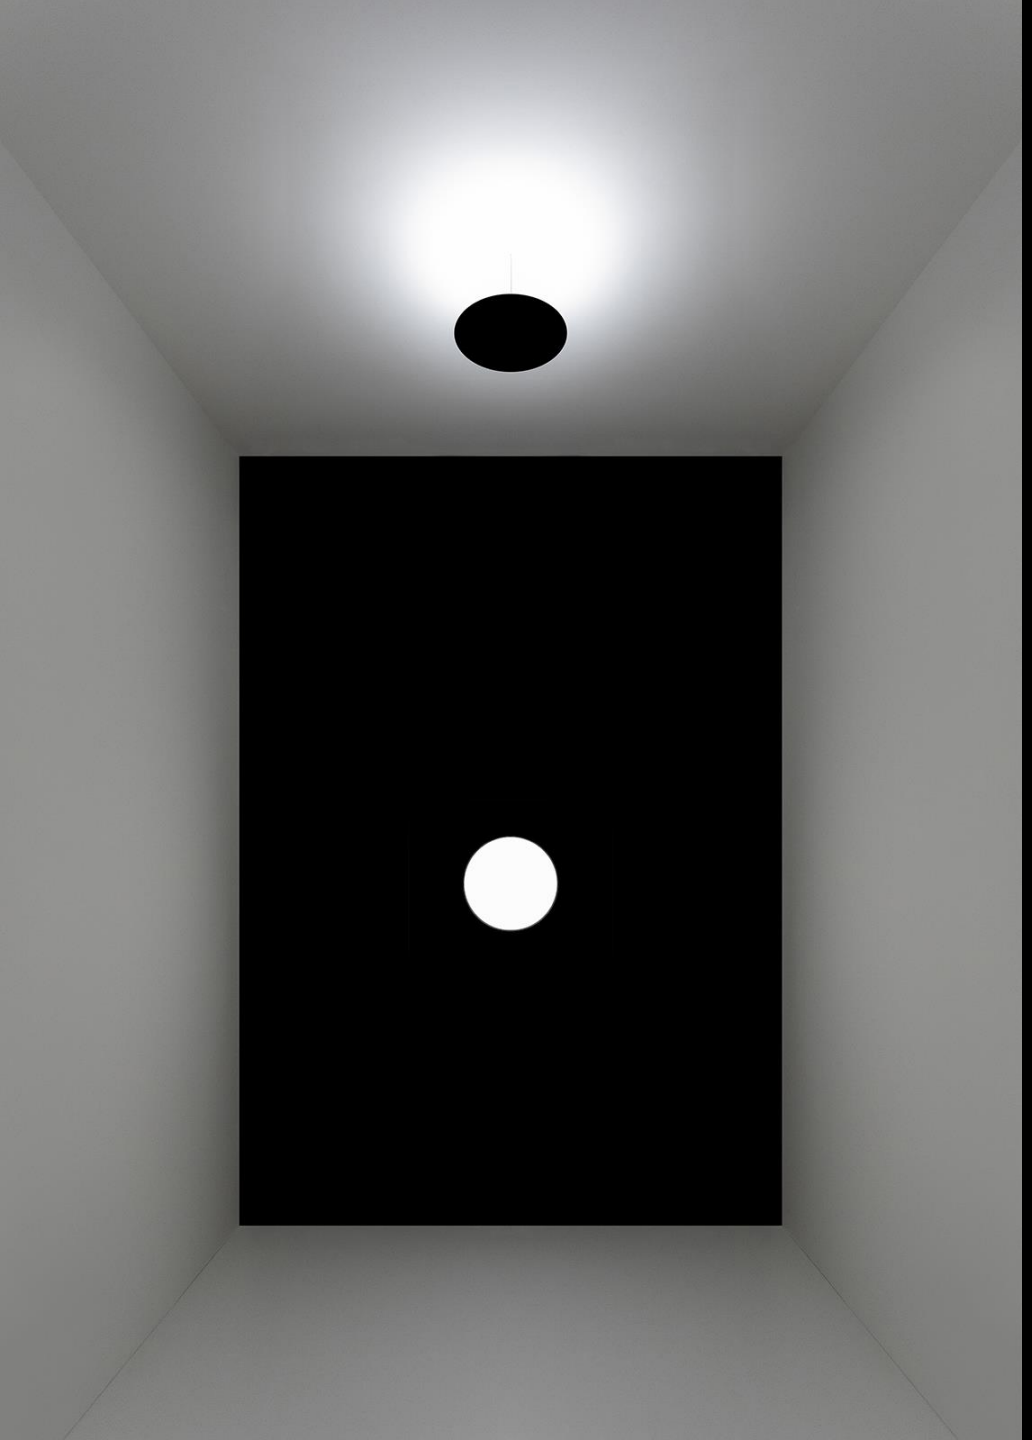

## AURORA

Davide Groppi / 2023

Ceiling-Wall / Diffuse / Indoor

**Material** Metal - PMMA

**Finish** **.03** Matt White **.04** Matt Black **.32** Copper Oxide

**Note** Wall and ceiling luminaire. Matt white diffuser. *Apparecchio illuminante da parete e soffitto. Diffusore bianco opaco.*




**AURORA**
28W
110-240V - 50/60Hz
3000K - 2700lm
CRI >80
Driver integrated
DALI - PUSH - 1-10V
CE IP20

| | |
|---|---|
| Matt White - 3000K - DALI - PUSH - 1-10V | 1A4010300.30.07 |
| Matt Black - 3000K - DALI - PUSH - 1-10V | 1A4010400.30.07 |
| Copper Oxide - 3000K - DALI - PUSH - 1-10V | 1A4013200.30.07 |

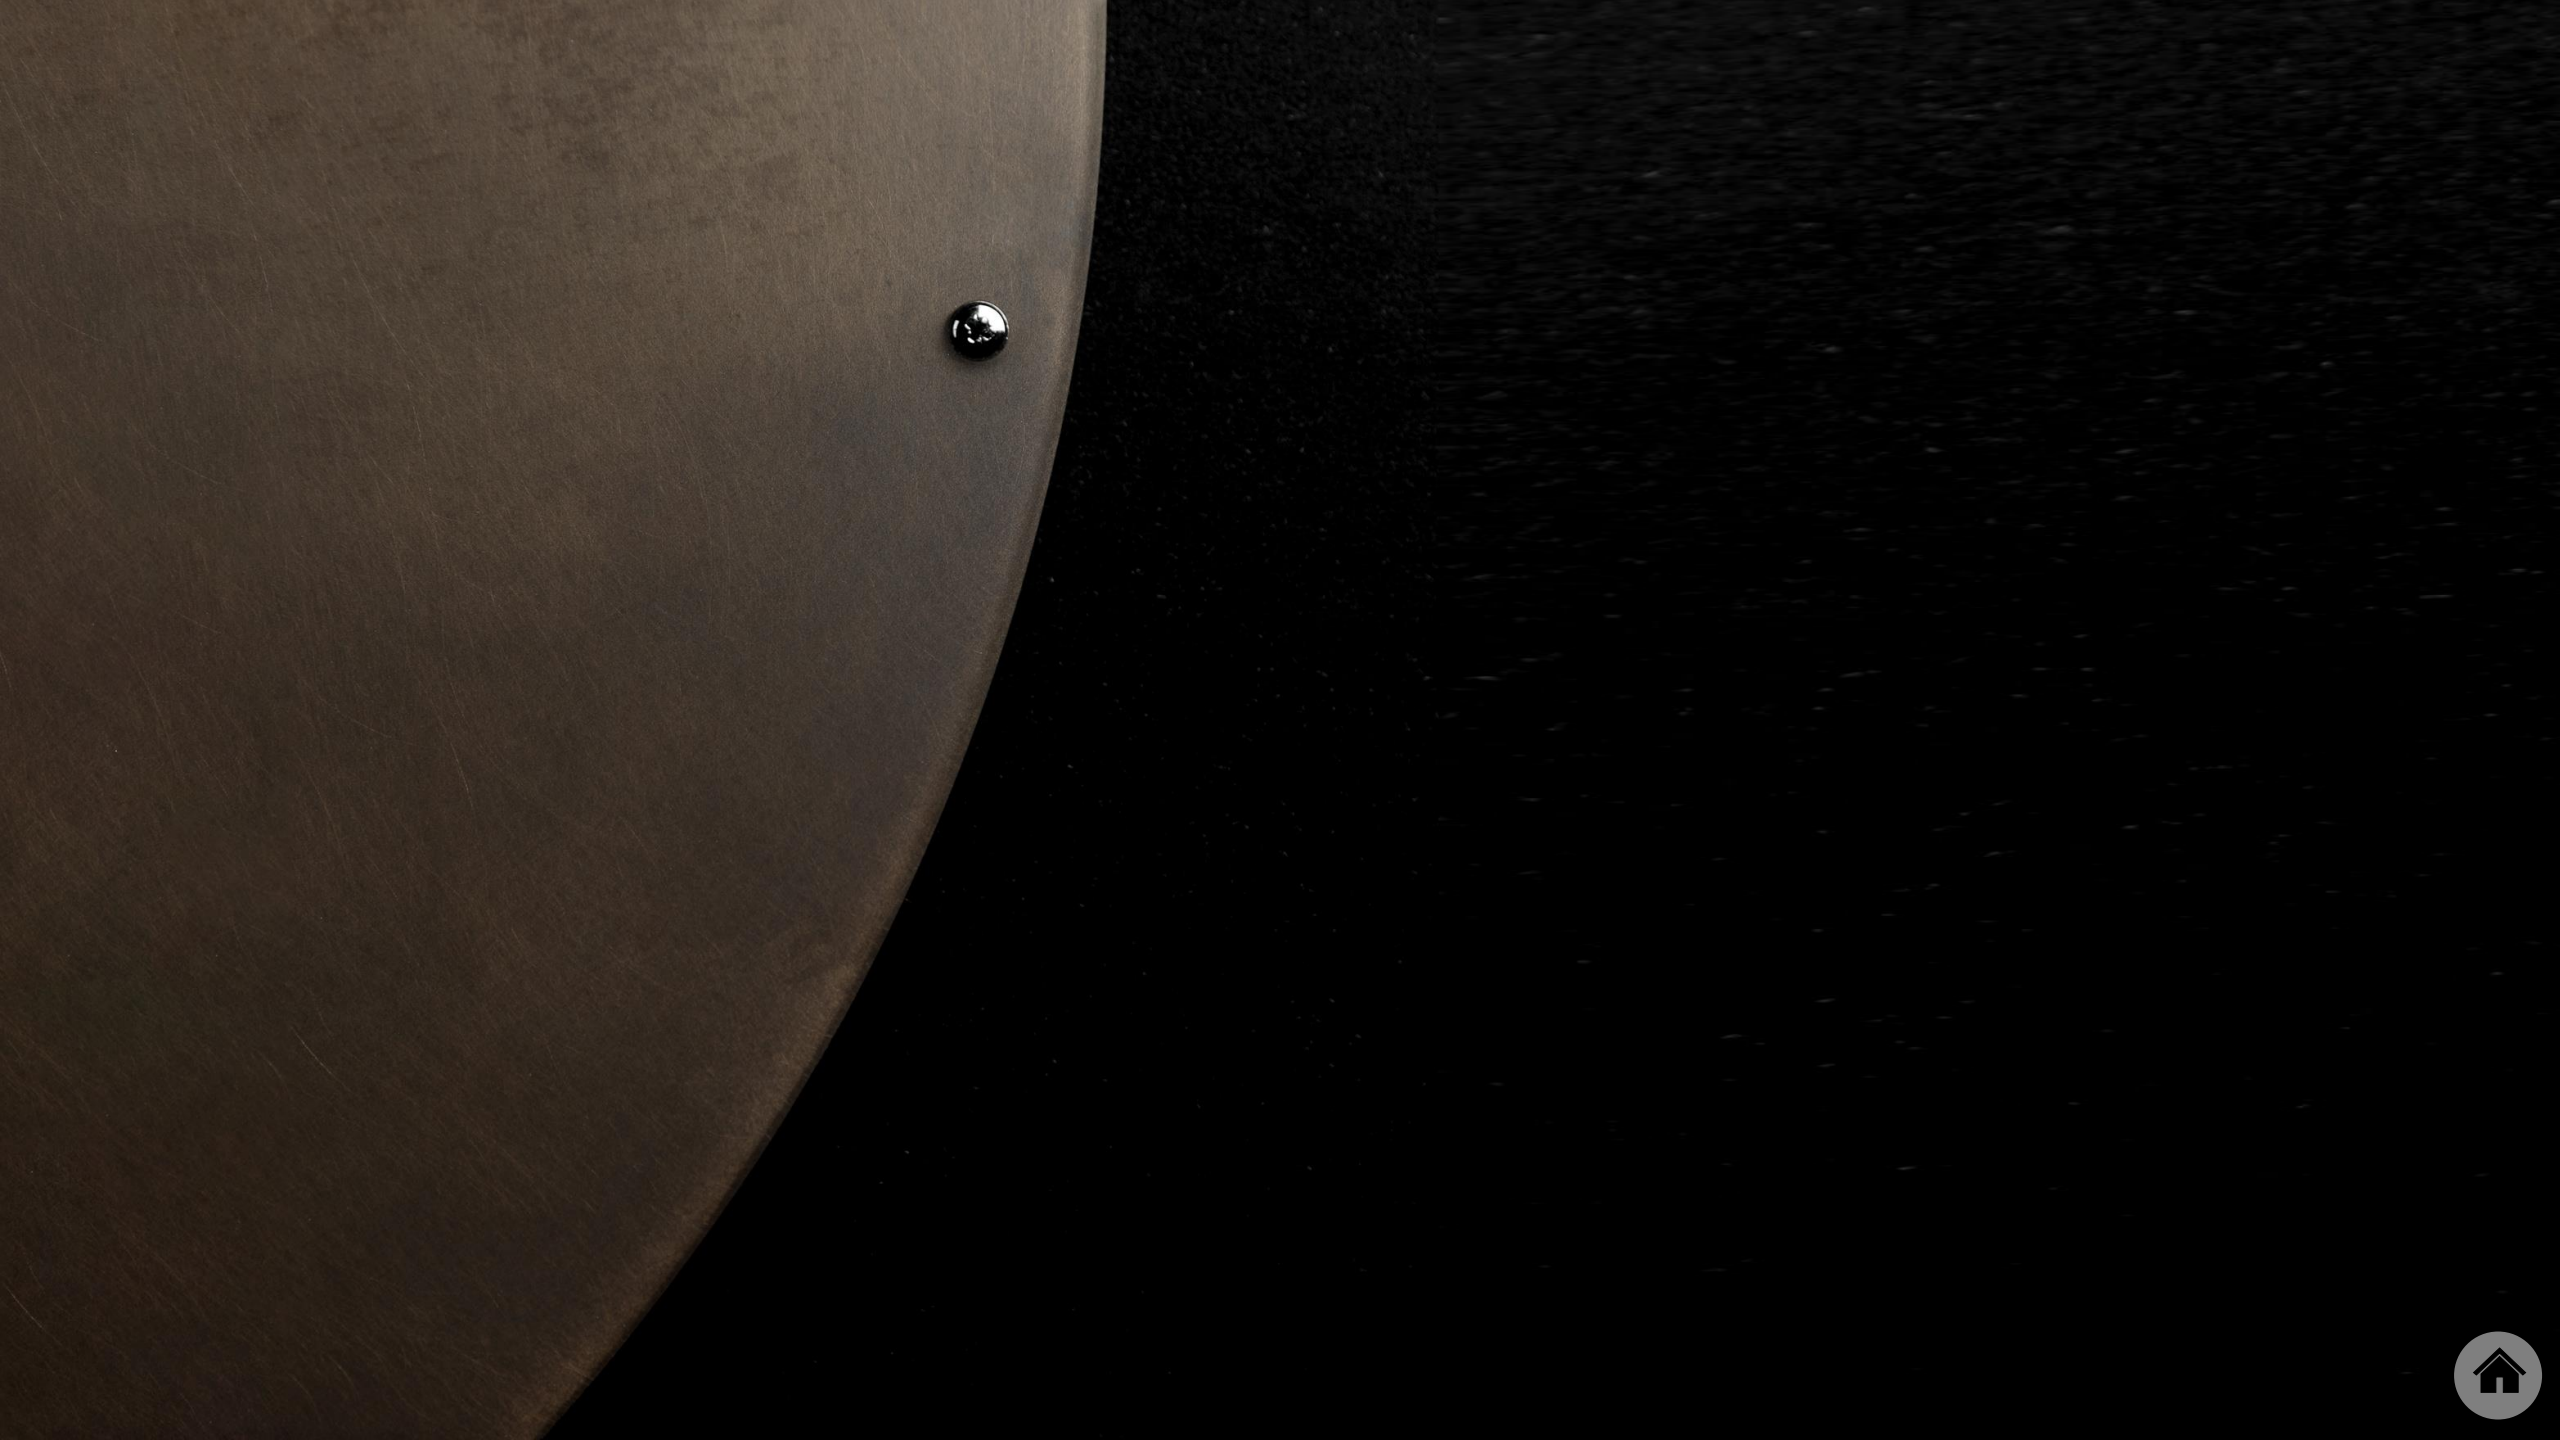

# VIS À VIS

Design Michele Groppi – 2023

Vis à Vis is a magic trick, between technique and illusion.
Once again, we decided to take away, seeking only the light.
Transparency is the main feature of this battery-powered lamp.

# VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless

**Material** Metal - Methacrylate

**Finish** **.00** Standard

**Note** Chargeable table luminaire. Transparent disc with refractive effect. Magnetic fixing LED module and transparent stem. Battery life: 9 hours.

*Apparecchio illuminante da tavolo a batteria ricaricabile. Disco trasparente con effetto rifrattivo. Stelo trasparente e modulo LED con fissaggio magnetico. Autonomia della batteria: 9 ore.*




**VIS À VIS**
2W
2700K - 110lm / 3000K - 113lm
CRI >90
ON/OFF
Driver with plug not included
USB cable included
CE IP20

| | |
|---|---|
| Standard - 2700K - ON/OFF | 1A4530000.27.00 |
| Standard - 3000K - ON/OFF | 1A4530000.30.00 |

## Optional accessories / Accessori opzionali

### Drivers / Alimentatori

| Driver with plug / Alimentatore con spina | | Not included |
|---|---|---|
| Matt Black | Input 110-240V - 50/60Hz<br>Output 5V DC - 2A - 10W - IP20 | 1Z0000088 |

### LED modules / Moduli LED

| LED module / Modulo LED | | | Included |
|---|---|---|---|
| Standard | 5W - 2700K - 110lm - CRI >90<br>Rechargeable lithium battery 5V DC Li-Ion<br>4800mAh - Battery life 9 hours | 1A5370000.27.00 | |
| | 2W - 3000K - 113lm - CRI >90<br>Rechargeable lithium battery 5V DC Li-Ion<br>4800mAh - Battery life 9 hours | 1A5370000.30.00 | |

### Other accessories / Altri accessori

| USB to USB-C cable / Cavo da USB a USB-C | | Included |
|---|---|---|
| Matt Black | Length 1 m | 1Z0000132 |



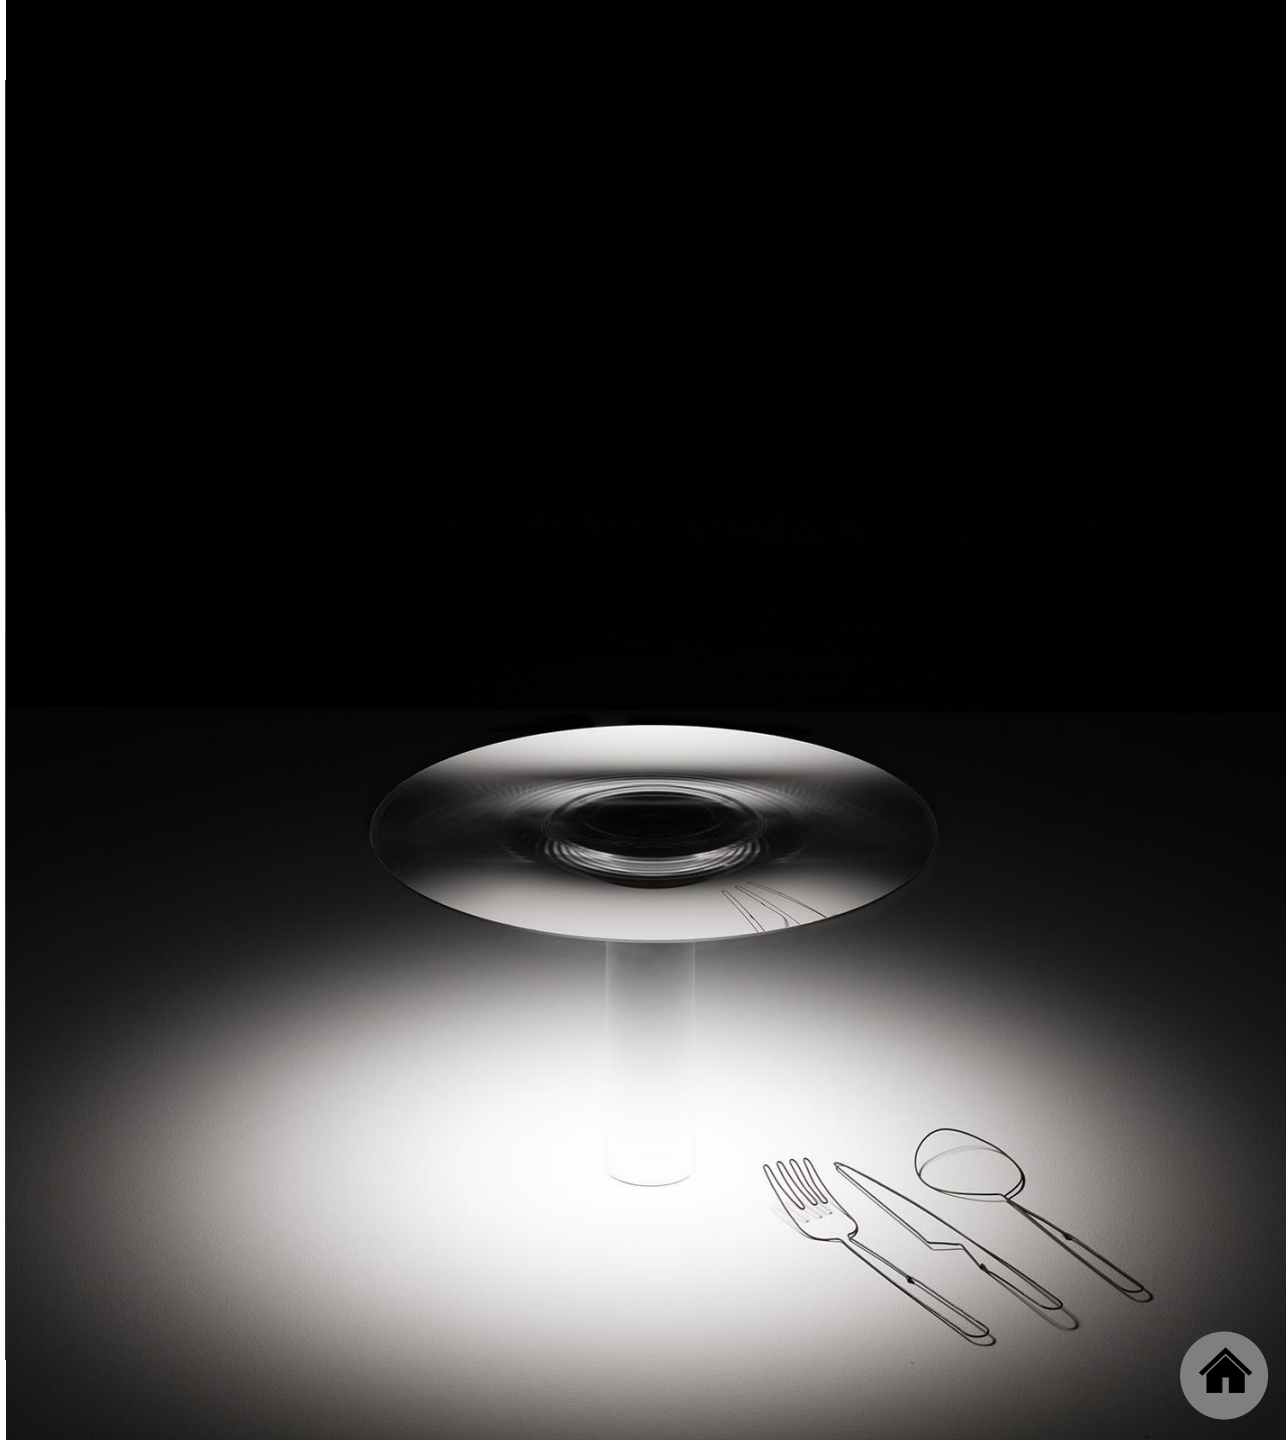

# POST PRANDIUM

Design Davide Groppi – 2023

During a meal with friends, a ladle is reused to scoop up the light and serve it onto the table. A project from many years ago, today in a new wireless version.

## POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

**Material** Metal - Methacrylate

**Finish** **.01** Polished Chrome

**Note** Chargeable table luminaire. Details with polished gold finish. Matt black base. Battery life: 9 hours.

*Apparecchio illuminante da tavolo a batteria ricaricabile. Dettagli con finitura oro lucido. Base nero opaco. Autonomia della batteria: 9 ore.*

**POST PRANDIUM**
2W
3000K - 171lm
CRI >90
ON/OFF
Driver with plug not included
USB cable included
CE IP20

| | |
|---|---|
| Polished Chrome - 3000K - ON/OFF | 1A4550100.30.00 |

### Optional accessories / Accessori opzionali

**Drivers / Alimentatori**

| Driver with plug / Alimentatore con spina | | Not included |
|---|---|---|
| Matt Black | Input 110-240V - 50/60Hz<br>Output 5V DC - 2A - 10W - IP20 | 1Z0000088 |

**Other accessories / Altri accessori**

| USB to USB-C cable / Cavo da USB a USB-C | | Included |
|---|---|---|
| Matt Black | Length 1 m | 1Z0000132 |

# COLIBRÌ

Design Davide Groppi – 2023

A minimal track system with tiny lights, small hummingbirds that perch where needed.
Luminaire designed also to be powered by ENDLESS system.

**Layout example of wall and ceiling version**

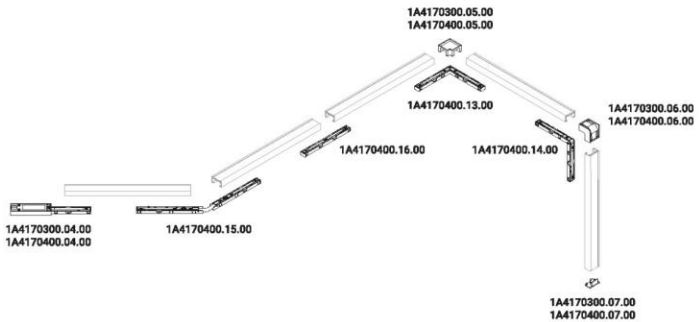


**Layout example of recessed version**

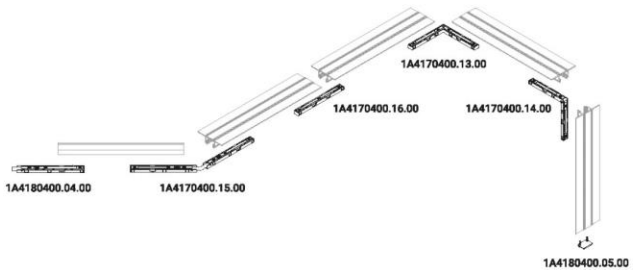






Systems / Direct / Indoor

**Material**

**Finish** **.04** Matt Black

**Note** Ceiling and wall track system operating at 48V DC. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Sistema a binario da soffitto e parete funzionante a 48V DC. Alimentabile anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*

## Compulsory accessories / Accessori obbligatori

Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto

| Wall and ceiling track - 1 m / Binario da parete e soffitto - 1 m | Not included |
|---|---|
| Matt White | 1A4170300.01.00 |
| Matt Black | 1A4170400.01.00 |

| Wall and ceiling track - 2 m / Binario da parete e soffitto - 2 m | Not included |
|---|---|
| Matt White | 1A4170300.02.00 |
| Matt Black | 1A4170400.02.00 |

| Wall and ceiling track - 3 m / Binario da parete e soffitto - 3 m | Not included |
|---|---|
| Matt White | 1A4170300.03.00 |
| Matt Black | 1A4170400.03.00 |




| Power connector / Elemento di alimentazione | Not included |
|---|---|
| Matt White | 1A4170300.04.00 |
| Matt Black | 1A4170400.04.00 |

| End cap / Tappo di chiusura | Not included |
|---|---|
| Matt White | 1A4170300.07.00 |
| Matt Black | 1A4170400.07.00 |

# COLIBRÌ

Davide Groppi / 2023

## Compulsory accessories / Accessori obbligatori

Installation kits for recessed track / Kit d'installazione per binario da incasso

| Recessed wall and ceiling track - 1 m / Binario da parete e soffitto da incasso - 1 m | | | Not included |
|---|---|---|---|
| Matt Black | | 1A4180400.01.00 | |

| Recessed wall and ceiling track - 2 m / Binario da parete e soffitto da incasso - 2 m | | | Not included |
|---|---|---|---|
| Matt Black | | 1A4180400.02.00 | |

| Recessed wall and ceiling track - 3 m / Binario da parete e soffitto da incasso - 3 m | | | Not included |
|---|---|---|---|
| Matt Black | | 1A4180400.03.00 | |

| Power connector / Elemento di alimentazione | | | Not included |
|---|---|---|---|
| Matt Black | For recessed track | 1A4180400.04.00 | |

| End cap / Tappo di chiusura | | | Not included |
|---|---|---|---|
| Matt Black | For recessed track | 1A4180400.05.00 | |

Drivers / Alimentatori




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| | Input 100-240V - 50/60Hz<br>Output 48V - 60W - IP20 - DALI | 1A4170000.19.00 | |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| | Input 100-240V - 50/60Hz<br>Output 48V - 150W - IP20 - DALI | 1A2810000.11.00 | |

## Optional accessories / Accessori opzionali

Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto

| Corner joint cover H / Coprigiunto angolare H | | | Not included |
|---|---|---|---|
| Matt White | For wall and ceiling track | 1A4170300.05.00 | |
| Matt Black | For wall and ceiling track | 1A4170400.05.00 | |

| Corner joint cover V / Coprigiunto angolare V | | | Not included |
|---|---|---|---|
| Matt White | For wall and ceiling track | 1A4170300.06.00 | |
| Matt Black | For wall and ceiling track | 1A4170400.06.00 | |

| Cover - 3 m / Copertura - 3 m | | | Not included |
|---|---|---|---|
| Matt White | For wall and ceiling track | 1A4170300.08.00 | |
| Matt Black | For wall and ceiling track | 1A4170400.08.00 | |




| Endless connector / Connettore Endless | | | Not included |
|---|---|---|---|
| Standard | For wall and ceiling track | 1A4170000.20.00 | |

Installation kits for recessed track / Kit d'installazione per binario da incasso

| Cover - 3 m / Copertura - 3 m | | | Not included |
|---|---|---|---|
| Matt White | For recessed track | 1A4180300.08.00 | |
| Matt Black | For recessed track | 1A4180400.08.00 | |

| Template / Dima | | | Not included |
|---|---|---|---|
| Standard | For recessed track | 1A4180000.09.00 | |





## Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione

| L connector / Connettore a L | | Not included |
|---|---|---|
| Matt Black | 1A4170400.13.00 | |

| Ceiling wall connector / Connettore soffitto-parete | | Not included |
|---|---|---|
| Matt Black | 1A4170400.14.00 | |




| Flexible joint / Giunto flessibile | | Not included |
|---|---|---|
| Matt Black | 1A4170400.15.00 | |

| Linear connector / Connettore lineare | | Not included |
|---|---|---|
| Matt Black | 1A4170400.16.00 | |

| Locking tool / Strumento per bloccaggio | | Not included |
|---|---|---|
| Standard | 1A4170000.17.00 | |

## Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti




**COLIBRÌ 18 - 15°**
2W - 0,07A
48V DC
2700K - 81lm / 3000K - 84lm
CRI >90
Beam 15°
Driver integrated
DALI
CE IP20

| | |
|---|---|
| Matt Black - 2700K - DALI | 1A4260400.27.01 |
| Matt Black - 3000K - DALI | 1A4260400.30.01 |




**COLIBRÌ 18 - 25°**
2W - 0,07A
48V DC
2700K - 79lm / 3000K - 81lm
CRI >90
Beam 25°
Driver integrated
DALI
CE IP20

| | |
|---|---|
| Matt Black - 2700K - DALI | 1A4270400.27.01 |
| Matt Black - 3000K - DALI | 1A4270400.30.01 |




**COLIBRÌ 28 - BEAM 15°**
4W - 0,14A
48V DC
2700K - 147lm / 3000K - 151lm
CRI >90
Beam 15°
Driver integrated
DALI
CE IP20

| | |
|---|---|
| Matt Black - 2700K - DALI | 1A4280400.27.01 |
| Matt Black - 3000K - DALI | 1A4280400.30.01 |








**COLIBRÌ 28 - BEAM 25°**
5W - 0,14A
48V DC
2700K - 250lm / 3000K - 258lm
CRI >90
Beam 25°
Driver integrated
DALI
CE IP20

| | |
|---|---|
| Matt Black - 2700K - DALI | 1A4290400.27.01 |
| Matt Black - 3000K - DALI | 1A4290400.30.01 |

FATE.

«ova plurimorum animalium,
Struthiique,præcipue
(B. Ceruti e A. Chiocco, 1622)
Nel Medioevo e nel Rinascimento il suo uovo fu simbolo dell'Immacolata Concezione o della Resurrezione. Per queste ragioni, le uova di struzzo erano
*In Mediaeval and Renaissance times ostrich eggs became a symbol of the Immaculate Conception and Resurrection. This is why they were hung from the*

# HAZARD

Design Davide Groppi – 2023

We have always been thrilled by bare, abandoned lamps.
On the walls of mountain huts, in the countryside of our plain.
Unfinished works, lamps still to be decided, ephemeral thoughts that become poetry.
Wall lamp with direct light for outdoor environments with steel nail subject to natural oxidation over time.

## HAZARD

Davide Groppi / 2023

Wall / Direct / Outdoor

**Material** Metal - Thermoplastic resin

**Finish** **.00** Standard

**Note** Outdoor wall luminaire. Adjustable in all directions. One red and one black cable (1,5 m).

*Apparecchio illuminante da esterno da parete. Orientabile in tutte le direzioni. Un cavo rosso e un cavo nero (1,5 m).*




**HAZARD**
0,6W - E27
36V DC
2200K - 50lm
CRI 80
Driver not included
Bulb included
CE IP65

| | |
|---|---|
| Standard - 2200K | 1A4210000.22.20 |

### Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 110-240V | 36V/36W/IP67/ON/OFF | 1Z1120590 |

# REFLEX

Design Michele Groppi - 2022

A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution, which provides an indirect light that multiplies spaces and gives the eye unprecedented perspectives, unexpected depths, illusions of light.
Suspension version also available.
Luminaire designed also to be powered by ENDLESS system.

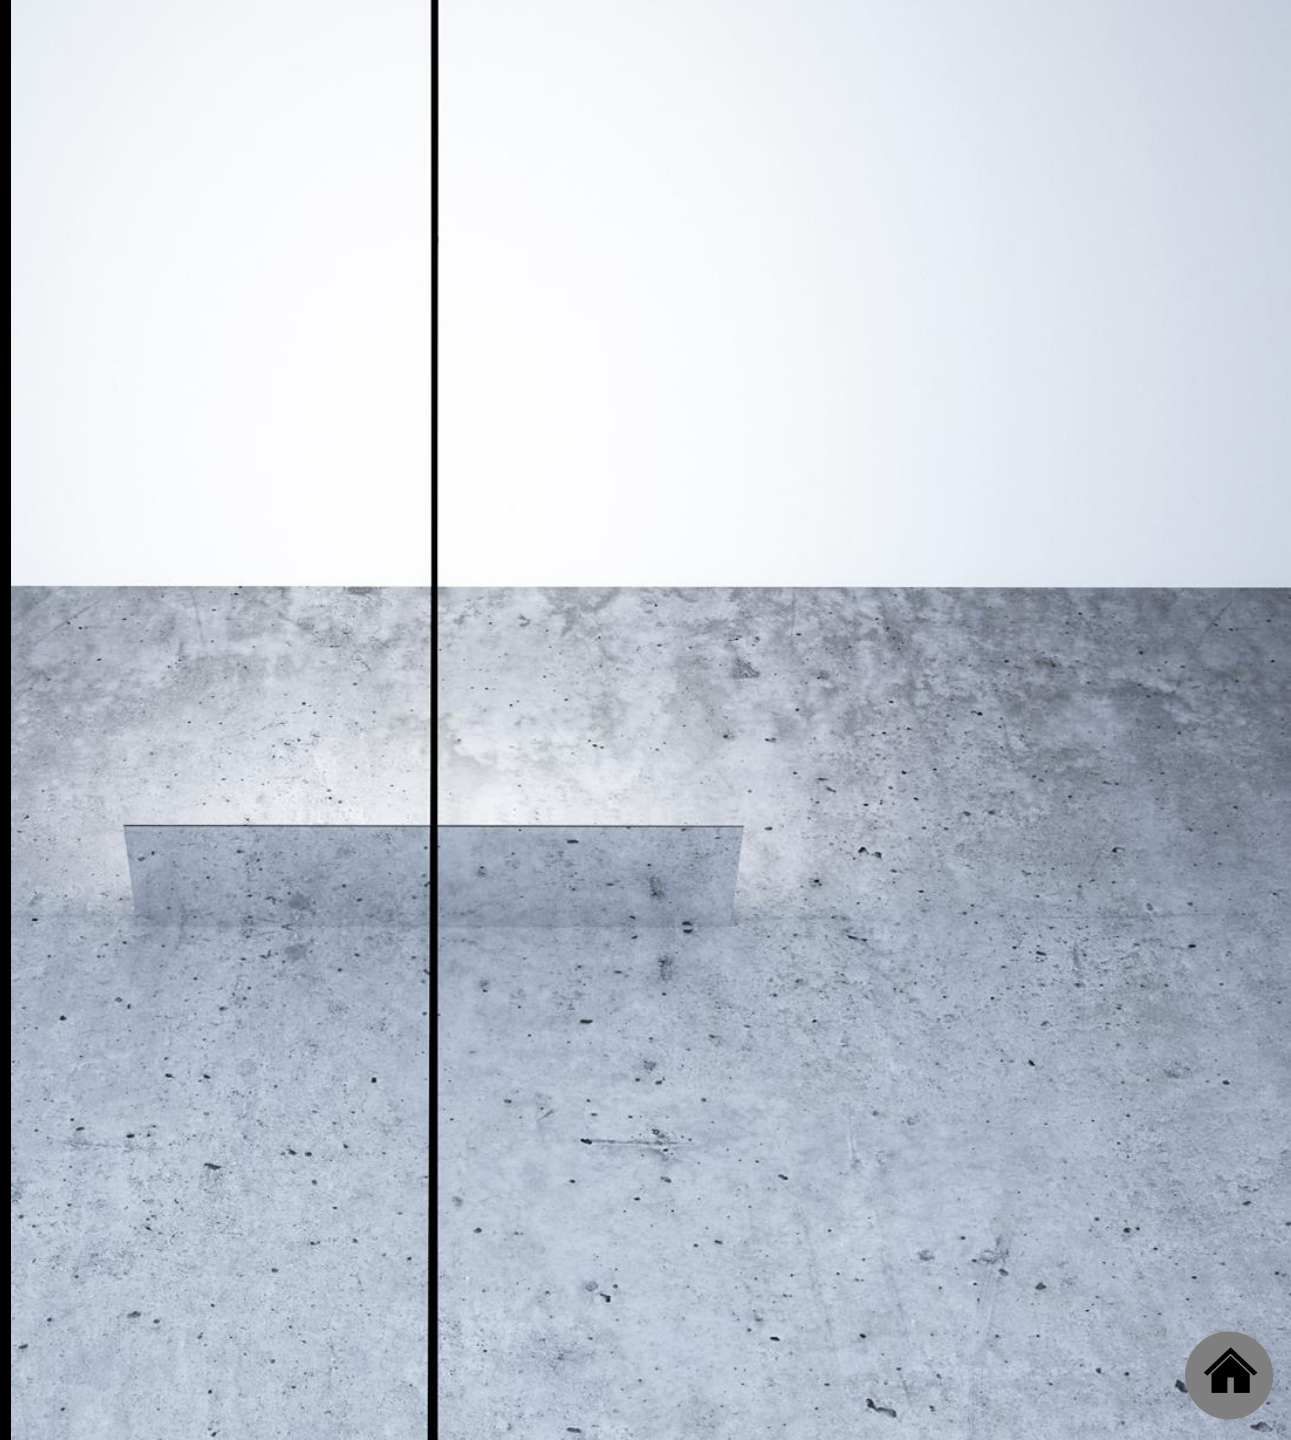

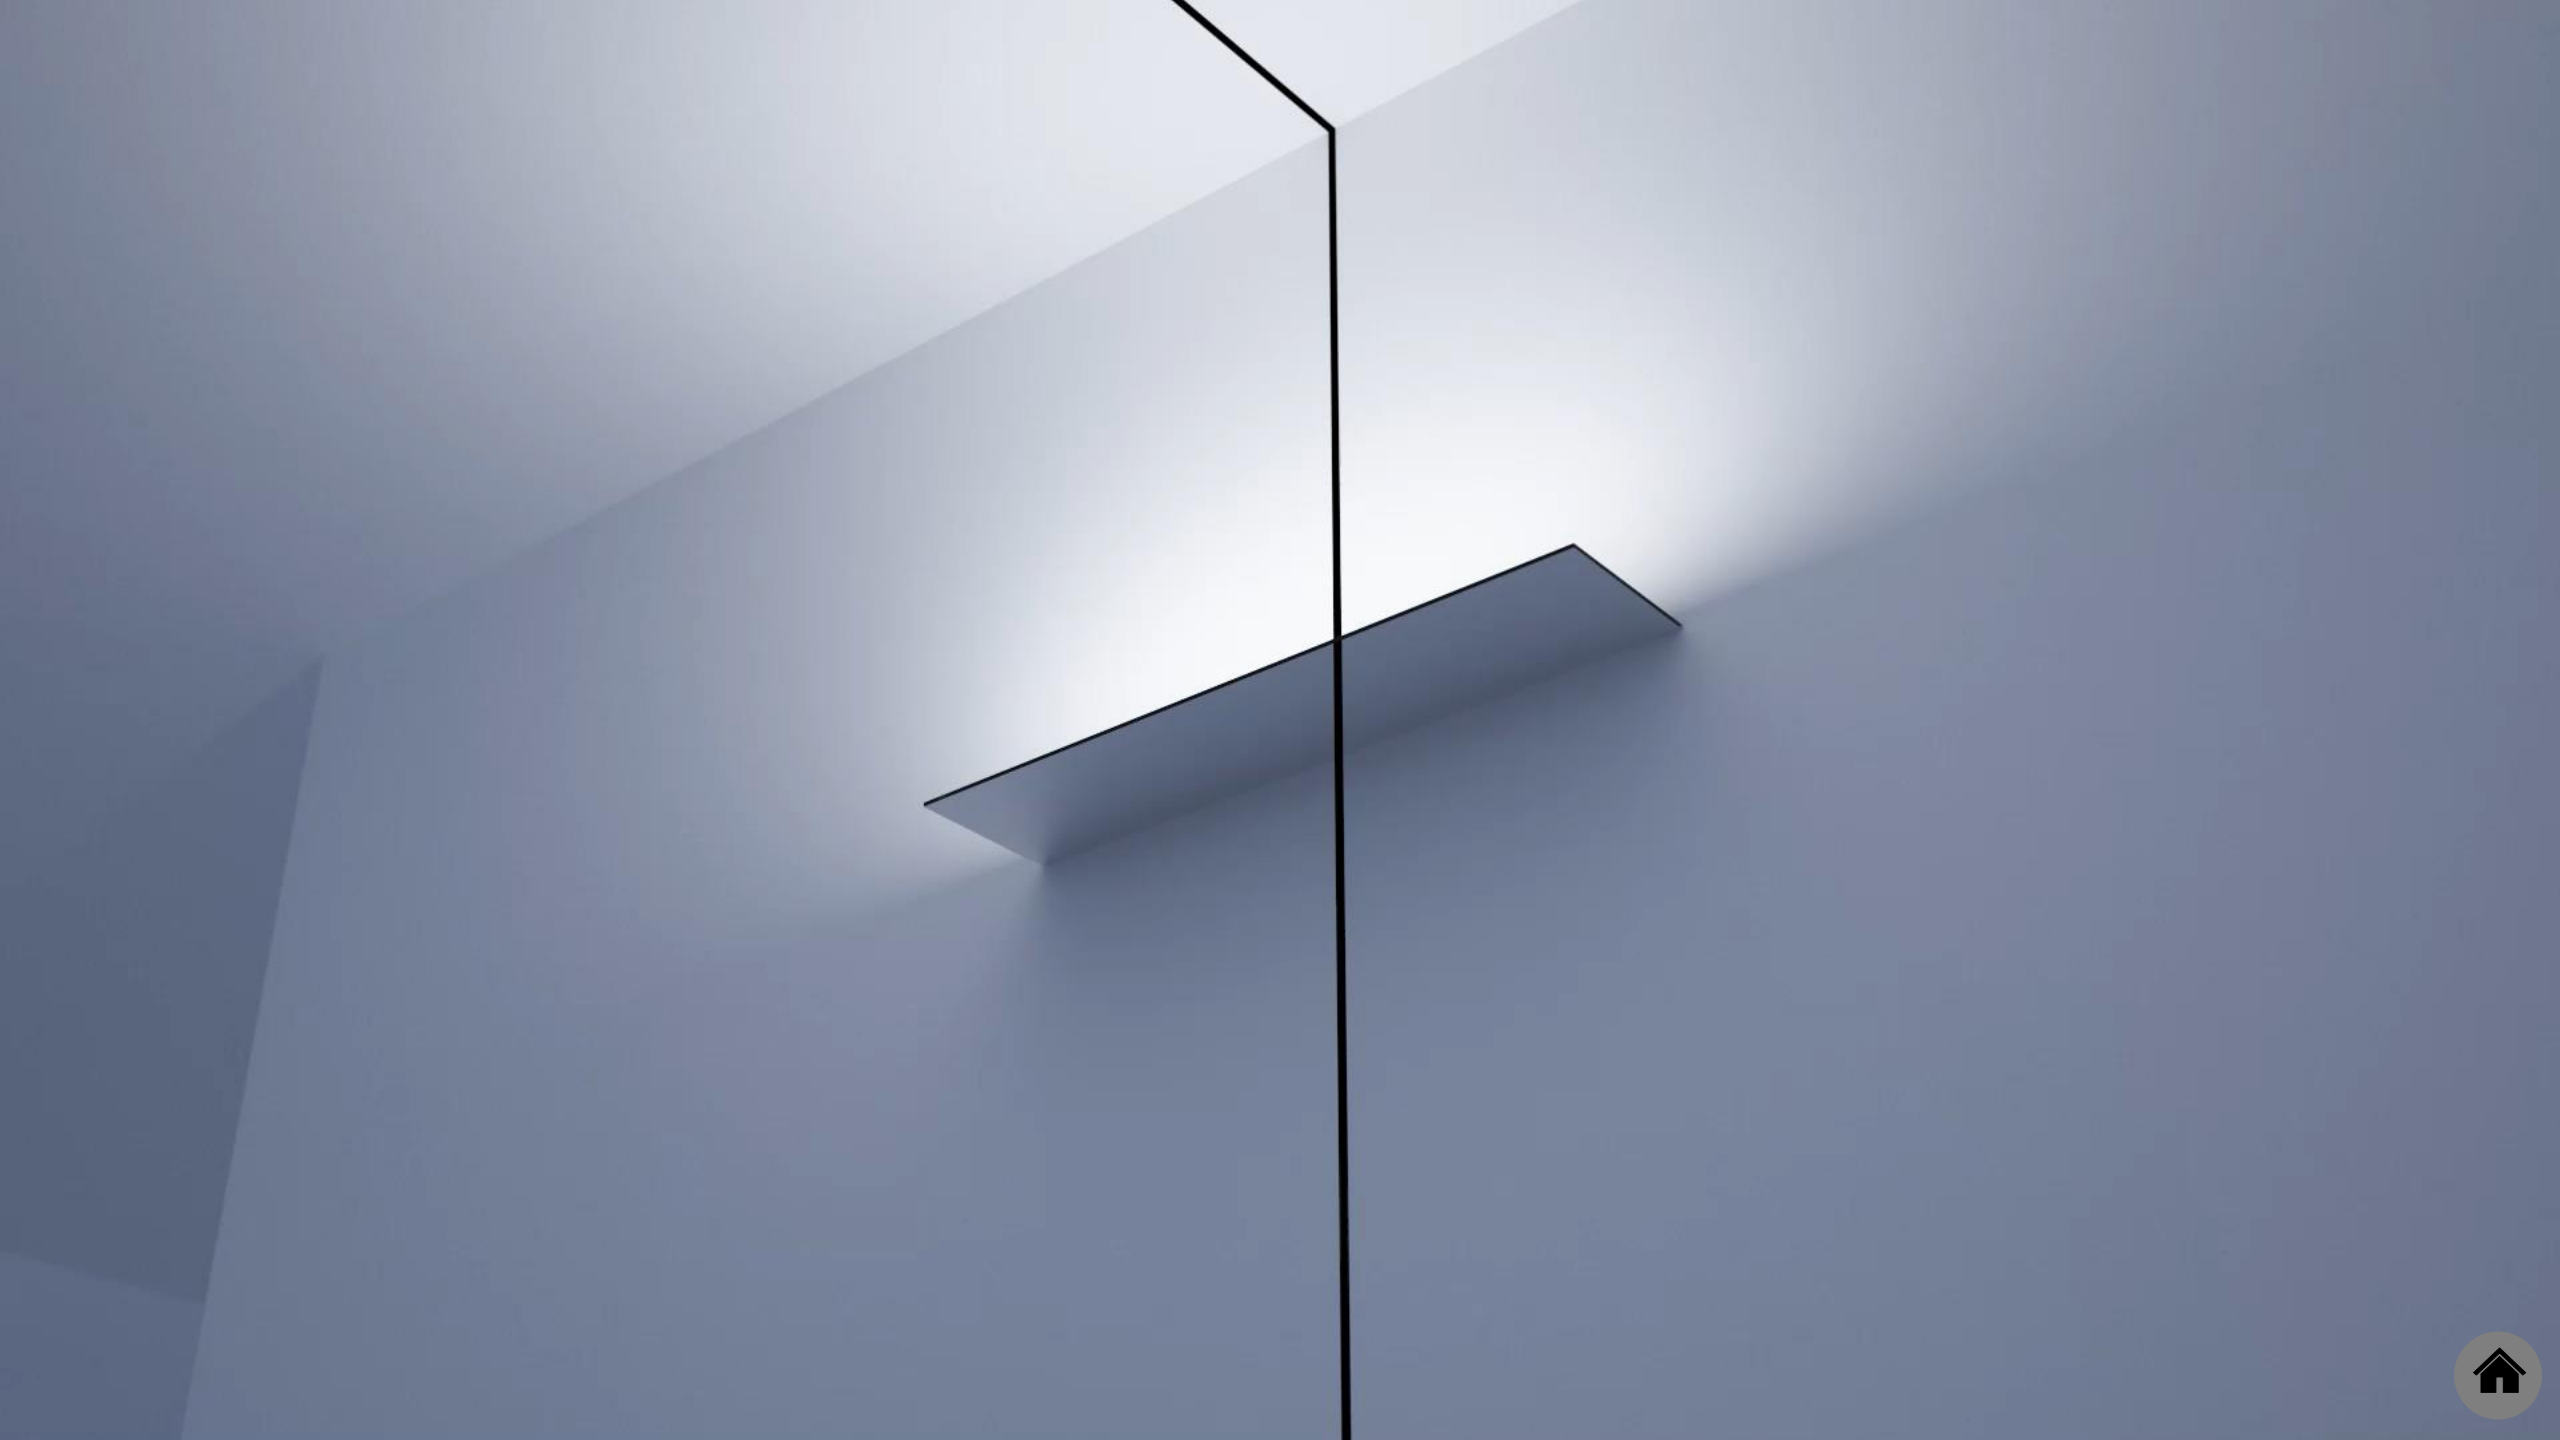

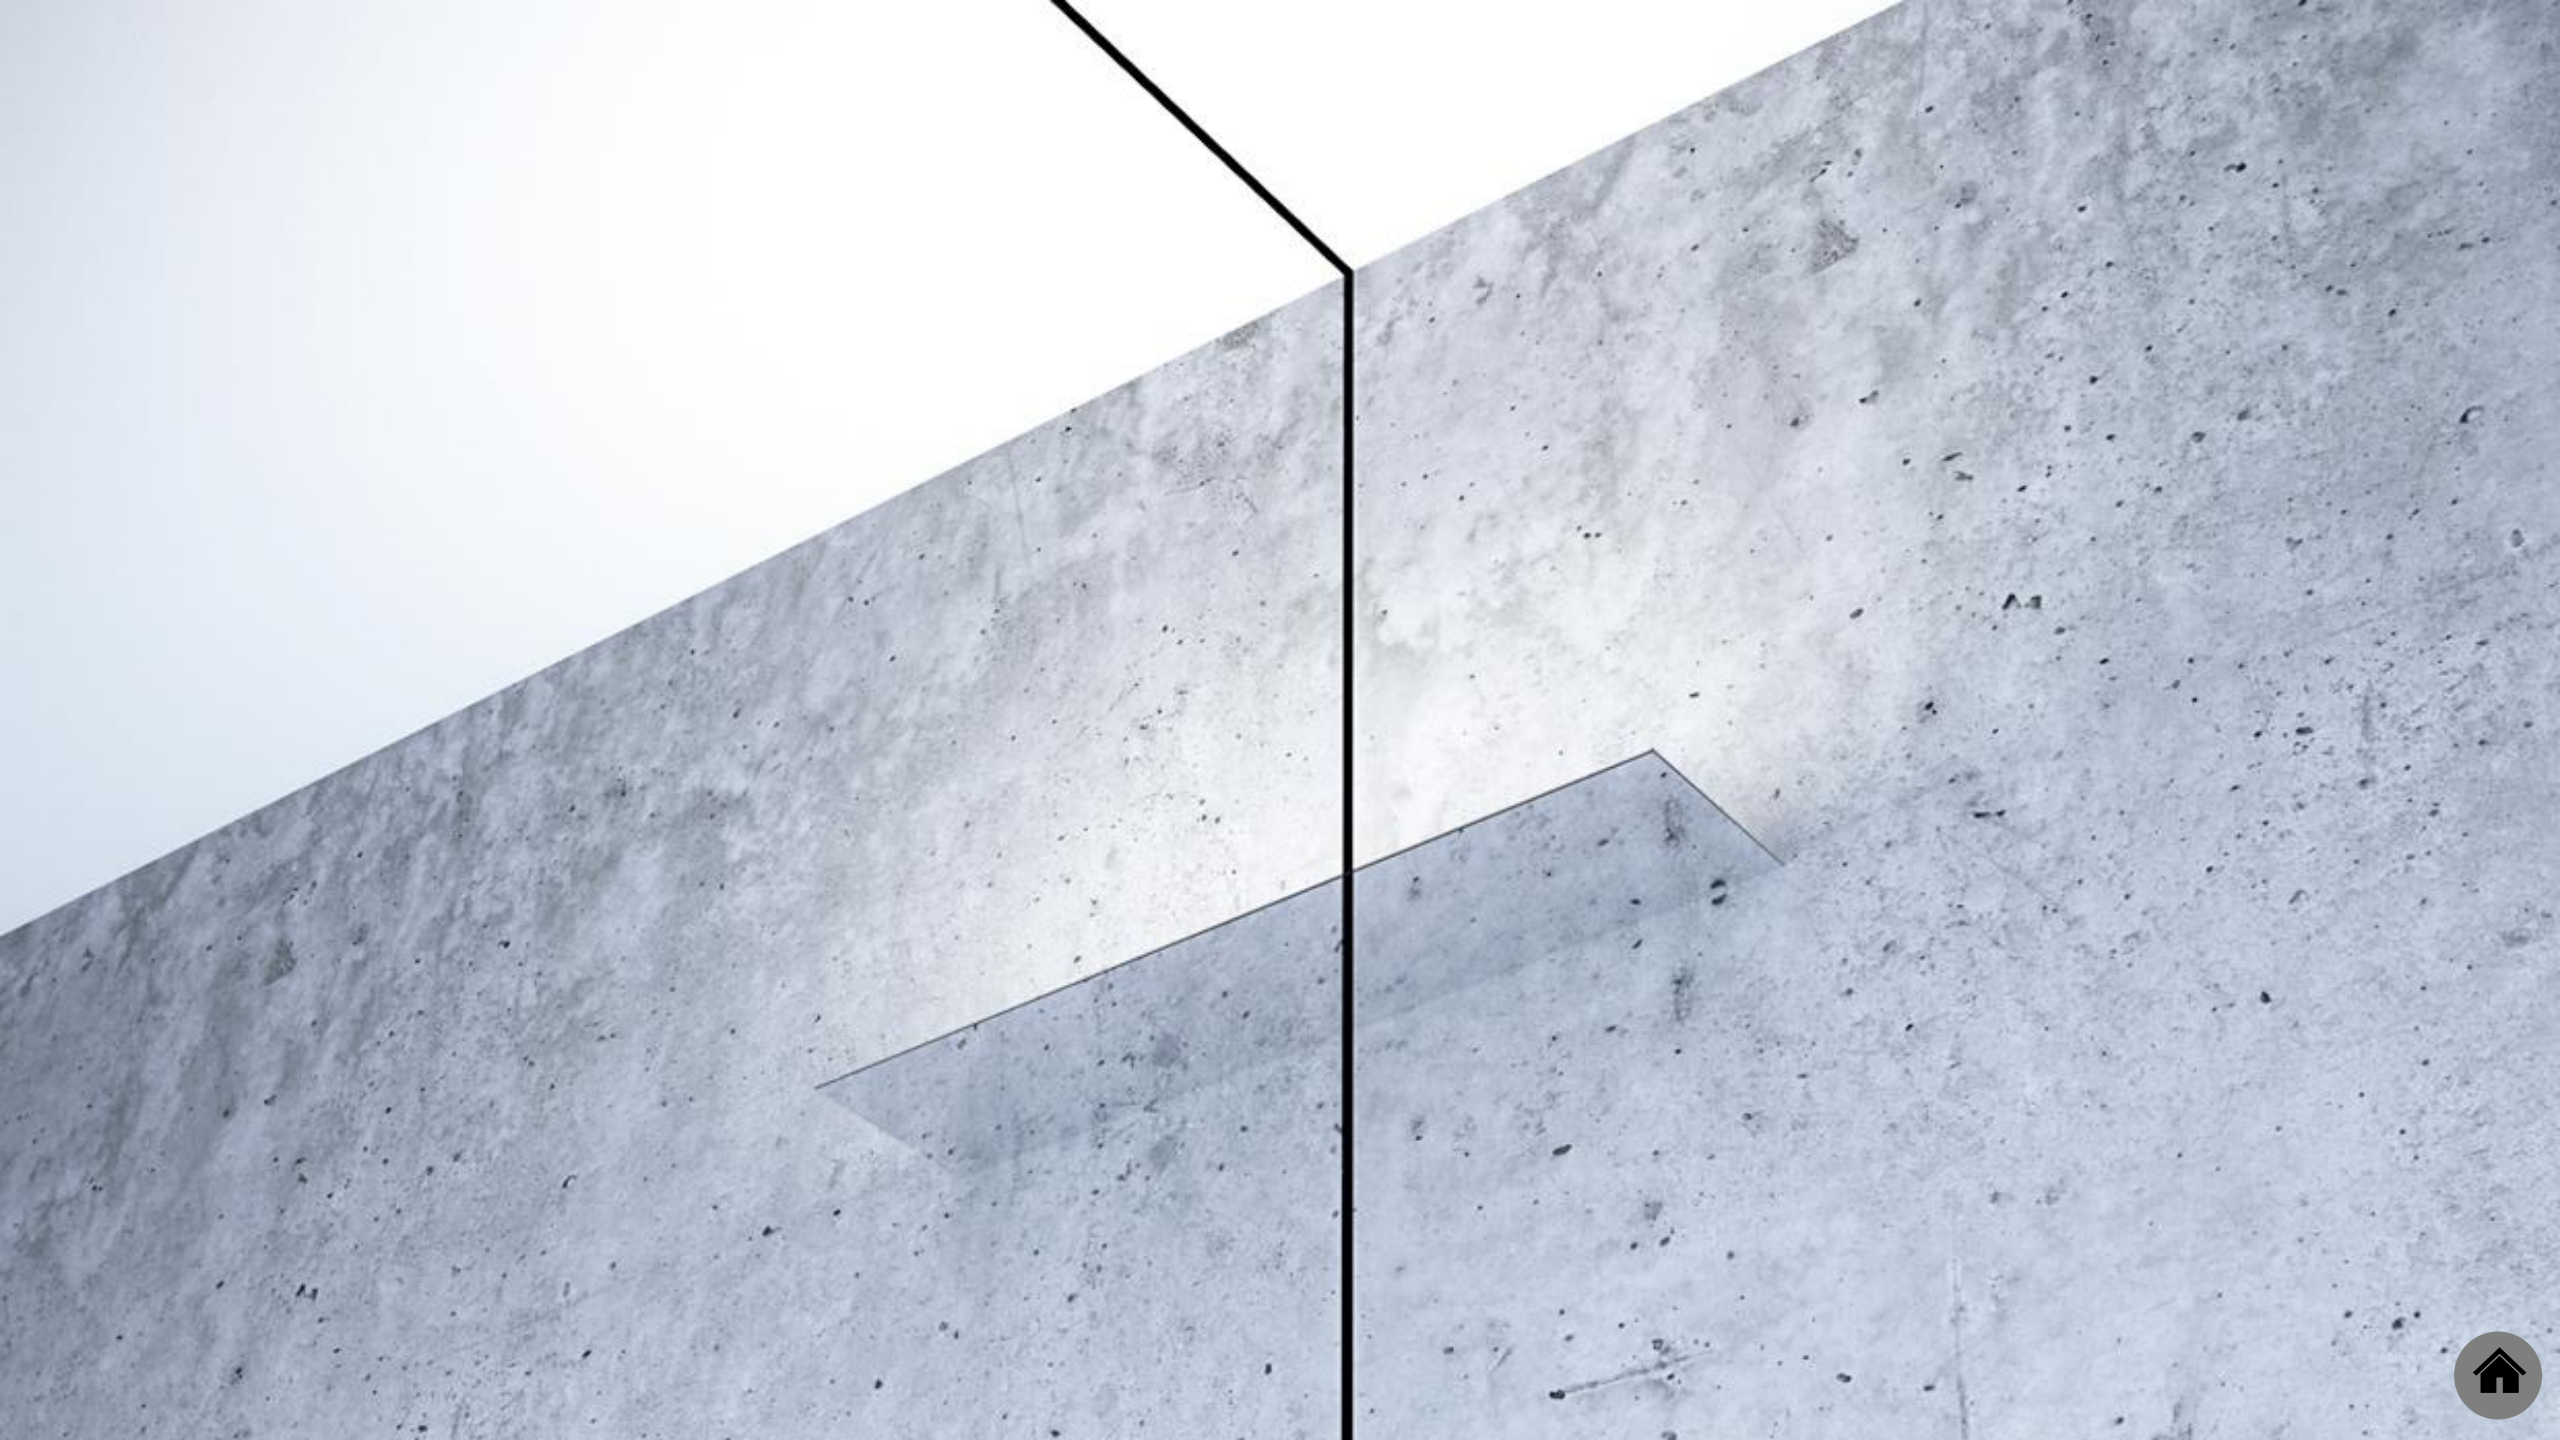

**KIT DI ALIMENTAZIONE CON SPINA** / POWER SUPPLY KIT WITH PLUG

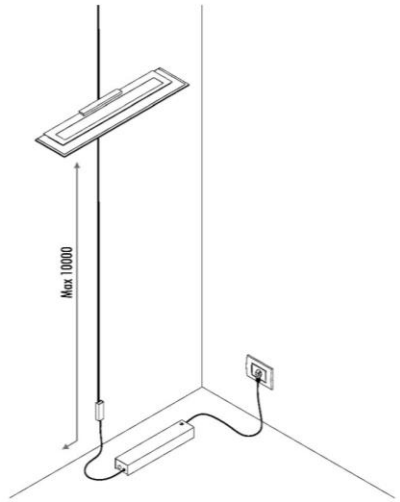


**KIT ROSONE DA PARETE E SOFFITTO** / WALL AND CEILING ROSE KIT

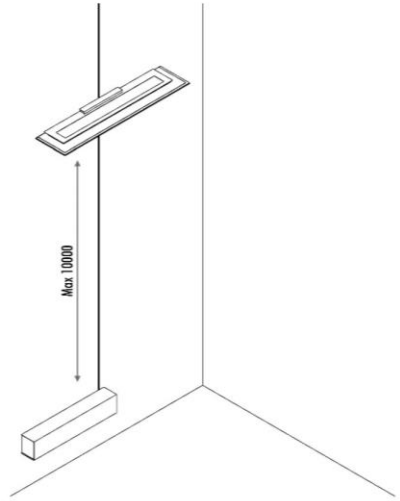


**KIT DI ALIMENTAZIONE REMOTO** / REMOTE POWER SUPPLY KIT

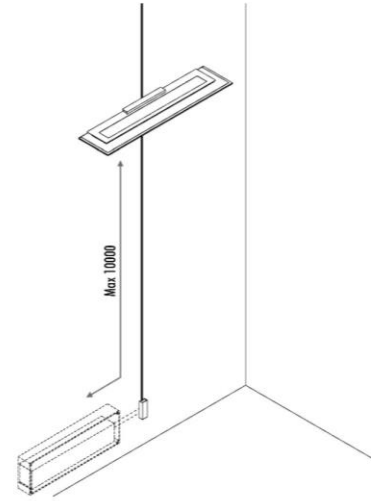

## REFLEX

Michele Groppi / 2022

Wall / Indirect / Indoor

**Material** Metal - Mirror

**Finish** **.04** Matt Black

**Note** Wall luminaire. Plane with mirror finish. Matt black rear plane. Possibility for the luminaire to be powered by ENDLESS system (Max 48V DC - Max 150W - Max 4A) and to be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Apparecchio illuminante da parete. Piano con finitura a specchio. Retro del piano nero opaco. Alimentabile anche con il sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*




**REFLEX**
23W - 0,57A
48V DC
2700K - 2158lm / 3000K - 2320lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt Black - 2700K | 1A0850400.27.20 |
| Matt Black - 3000K | 1A0850400.30.20 |

### Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 100-240V | 48V/60W/IP67/ON/OFF | 1Z1120640 |




| Driver / Alimentatore | | Not included |
|---|---|---|
| 220-240V | 48V/60W/IP20/DALI | 1Z0830820 |

1A0850400.27.40 / 1A0850400.30.40 - **INSTALLAZIONE CON KIT DI ALIMENTAZIONE REMOTO** / INSTALLATION WITH REMOTE POWER SUPPLY KIT

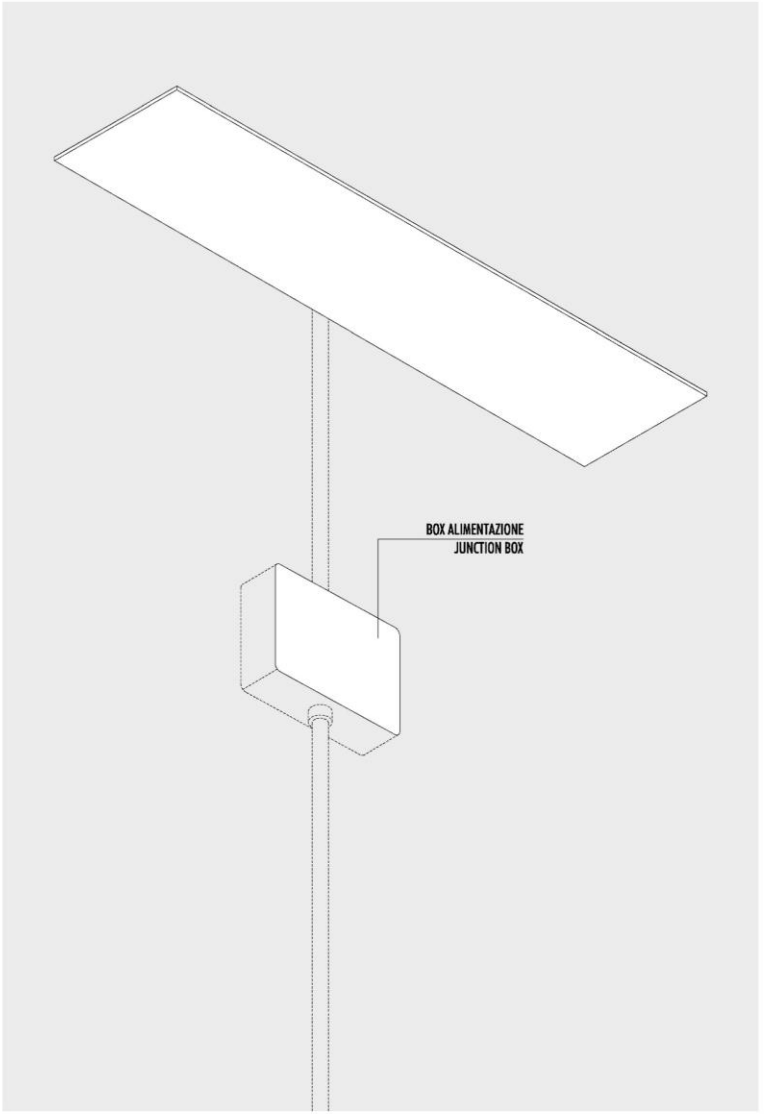

# NULLA

Design Davide Groppi - 2010

An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light. Nulla is a project that represents both the beginning and end of our work on light.
It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time we look at Nulla, we feel as though we can't get it better than that. Nulla generates light and propagates mystery. Nulla is the most generous of our lamps. Its sole objective is to hide and give all the attention to whatever it is lighting. What we see is only a tiny black hole, as if it were drawn on the ceiling.
A circle in the ceiling hiding a very bright LED and lens to project the light.

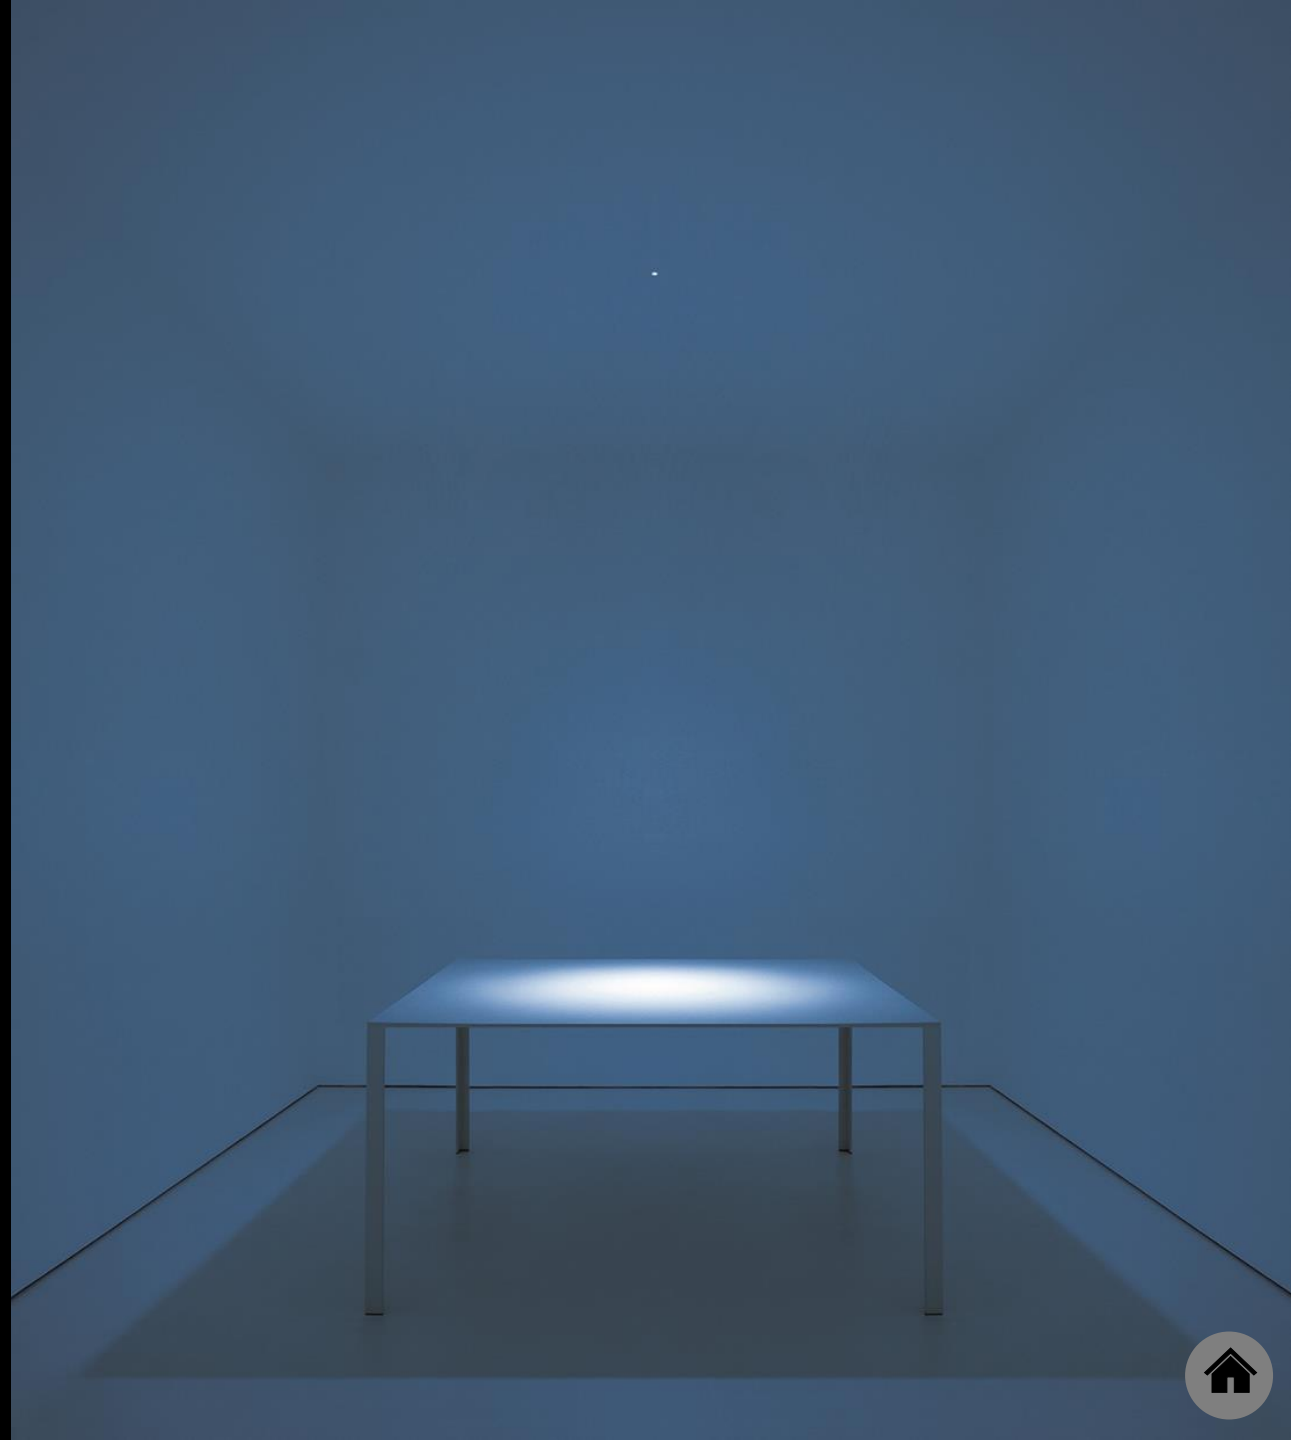

# NULLA

Davide Groppi / 2010

Recessed / Direct / Indoor

**Material** Metal

**Finish** **.00** Standard

**Note** Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.

*Apparecchio illuminante da incasso. Foro visibile con diametro da 18 / 25 mm. NULLA 18 e NULLA 25: apparecchio estraibile per manutenzione.*

**NULLA - 23°**
14W
24V DC
2700K - 425lm / 3000K - 458lm
CRI >90
Beam 23°
UGR <19
Driver not included
CE IP20/IP65

| | |
|---|---|
| Standard - 2700K | 1A4100000.27.20 |
| Standard - 3000K | 1A4100000.30.20 |

**NULLA - 32°**
14W
24V DC
2700K - 538lm / 3000K - 579lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP20/IP65

| | |
|---|---|
| Standard - 2700K | 1A2110000.27.20 |
| Standard - 3000K | 1A2110000.30.20 |

**NULLA 18 - 20°**
4,5W
24V DC
2700K - 174lm / 3000K - 186lm
CRI >90
Beam 20°
UGR <19
Driver not included
CE IP20

| | |
|---|---|
| Standard - 2700K | 1A2010000.27.20 |
| Standard - 3000K | 1A2010000.30.20 |

**NULLA 25 - 23°**
9W
24V DC
2700K - 304lm / 3000K - 327lm
CRI >90
Beam 23°
UGR <19
Driver not included
CE IP20/IP65

| | |
|---|---|
| Standard - 2700K | 1A4080000.27.20 |
| Standard - 3000K | 1A4080000.30.20 |

**NULLA 25 - 32°**
9W
24V DC
2700K - 384lm / 3000K - 413lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP20/IP65

| | |
|---|---|
| Standard - 2700K | 1A2020000.27.20 |
| Standard - 3000K | 1A2020000.30.20 |

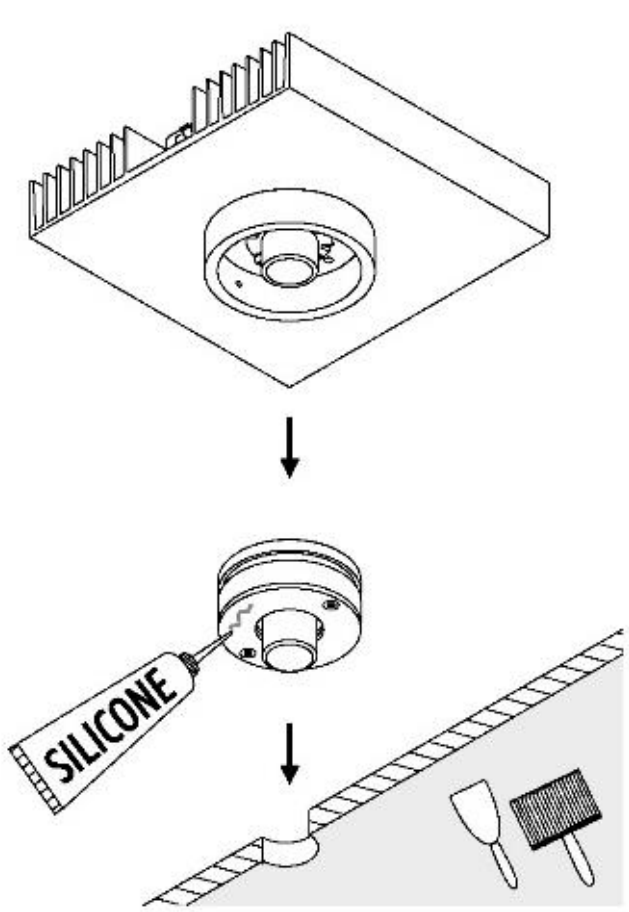
SILICONE

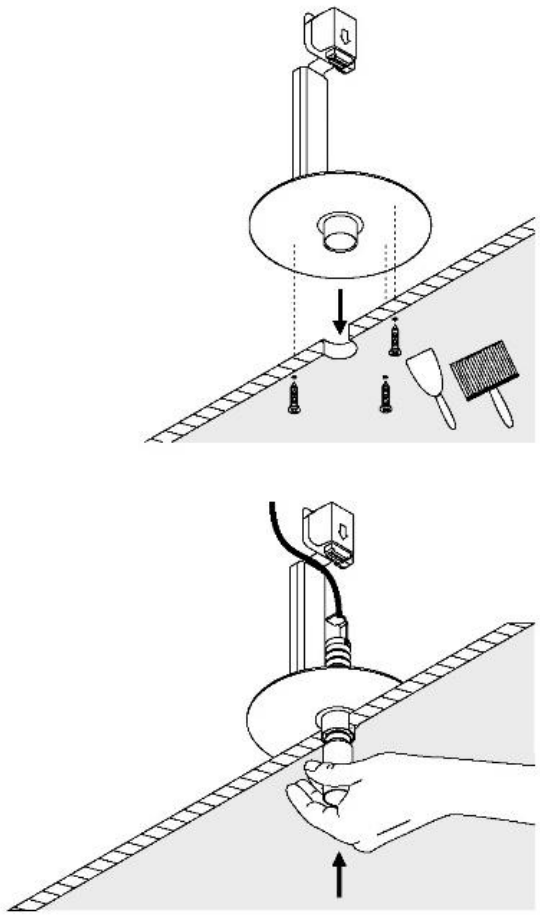

## Compulsory accessories / Accessori obbligatori

### Installation kits / Kit d'installazione

| Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| Matt Black | Cut-out Ø 21 mm<br>Minimum space for mounting 100 mm<br>IP65 | NULLA | 1A2200400.00.00 | |

| Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| Matt Black | Cut-out Ø 22 mm<br>Minimum space for mounting 190 mm | NULLA 18 | 1A2210400.00.00 | |

| Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| Matt Black | Cut-out Ø 35 mm<br>Minimum space for mounting 190 mm | NULLA 25 | 1A2170400.00.00 | |

| Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| Matt Black | Cut-out Ø 35 mm<br>Minimum space for mounting 145 mm<br>IP65 | NULLA 25 | 1A3980400.00.00 | |

| Plasterboard flange (bottom) ≠ 12,5 mm / Flangia (da sotto) per cartongesso ≠ 12,5 mm | | | | Not included |
|---|---|---|---|---|
| Matt Black | Cut-out Ø 35 mm<br>Minimum space for mounting 145 mm<br>IP65 | NULLA 25 | 1A4960400.00.00 | |

### Drivers / Alimentatori




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 24V/16W(15W)/IP20/DALI | 1Z0241180.24 | |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 24V/20W(15W)/IP20/PUSH | 1Z0240870.24 | |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V | 24V/20W/IP20/TRIAC/IGBT | 1Z0240850.24 | |





## Optional accessories / Accessori opzionali

### Installation kits / Kit d'installazione

| Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| Standard | Cut-out 205x205 mm | NULLA | 1A3780000.00.00 | |

| Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| Standard | Cut-out 415x415 mm | NULLA | 1A3790000.00.00 | |




| Masonry Box / Cassaforma per laterizio | | | Not included |
|---|---|---|---|
| Standard | NULLA 18 | 1A2390000.00.00 | |




| Concrete box / Cassaforma per cemento | | | Not included |
|---|---|---|---|
| Standard | NULLA 18 | 1A2240000.00.00 | |




| Masonry Box / Cassaforma per laterizio | | | Not included |
|---|---|---|---|
| Standard | NULLA 25 | 1A2380000.00.00 | |




| Concrete box / Cassaforma per cemento | | | Not included |
|---|---|---|---|
| Standard | NULLA 25 | 1A2230000.00.00 | |

## Compulsory accessories / Accessori obbligatori

Electrical power supply / Alimentazione elettrica




| Driver LED | | | | Not included |
|---|---|---|---|---|
| 220-240V | 24V/20W/IP20/TRIAC/IGBT | NULLA / NULLA 18 / NULLA 25 | 1Z0240850.24 | |




| Driver LED | | | | Not included |
|---|---|---|---|---|
| 220-240V(100-127V) | 24V/16W(15W)/IP20/DALI | NULLA / NULLA 18 / NULLA 25 | 1Z0241180.24 | |




| Driver LED | | | | Not included |
|---|---|---|---|---|
| 220-240V(100-127V) | 24V/20W(15W)/IP20/PUSH | NULLA / NULLA 18 / NULLA 25 | 1Z0240870.24 | |

## Optional accessories / Accessori opzionali

Installation kit / Kit installazione

| Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| | Cut-out 200 x 200 mm | NULLA | 1A3780000.00.00 | |

| Trapdoor for plasterboard 12,5 mm / Botola per cartongesso 12,5 mm | | | | Not included |
|---|---|---|---|---|
| | Cut-out 400 x 400 mm | NULLA | 1A3790000.00.00 | |



## Optional accessories / Accessori opzionali

Installation kit / Kit installazione




| Plaster box / Cassaforma per laterizio | | | | Not included |
|---|---|---|---|---|
| | Dimensions 189 x 445 mm | NULLA 18 | 1A2390000.00.00 | |




| Concrete box / Cassaforma per cemento armato | | | | Not included |
|---|---|---|---|---|
| | Dimensions 189 x 445 mm | NULLA 18 | 1A2240000.00.00 | |




| Plaster box / Cassaforma per laterizio | | | | Not included |
|---|---|---|---|---|
| | Dimensions 189 x 445 mm | NULLA 25 | 1A2380000.00.00 | |




| Concrete box / Cassaforma per cemento armato | | | | Not included |
|---|---|---|---|---|
| | Dimensions 189 x 445 mm | NULLA 25 | 1A2230000.00.00 | |

# EXTRADARK SYSTEM

UGR

UNIFIED GLAGE RATING < 19

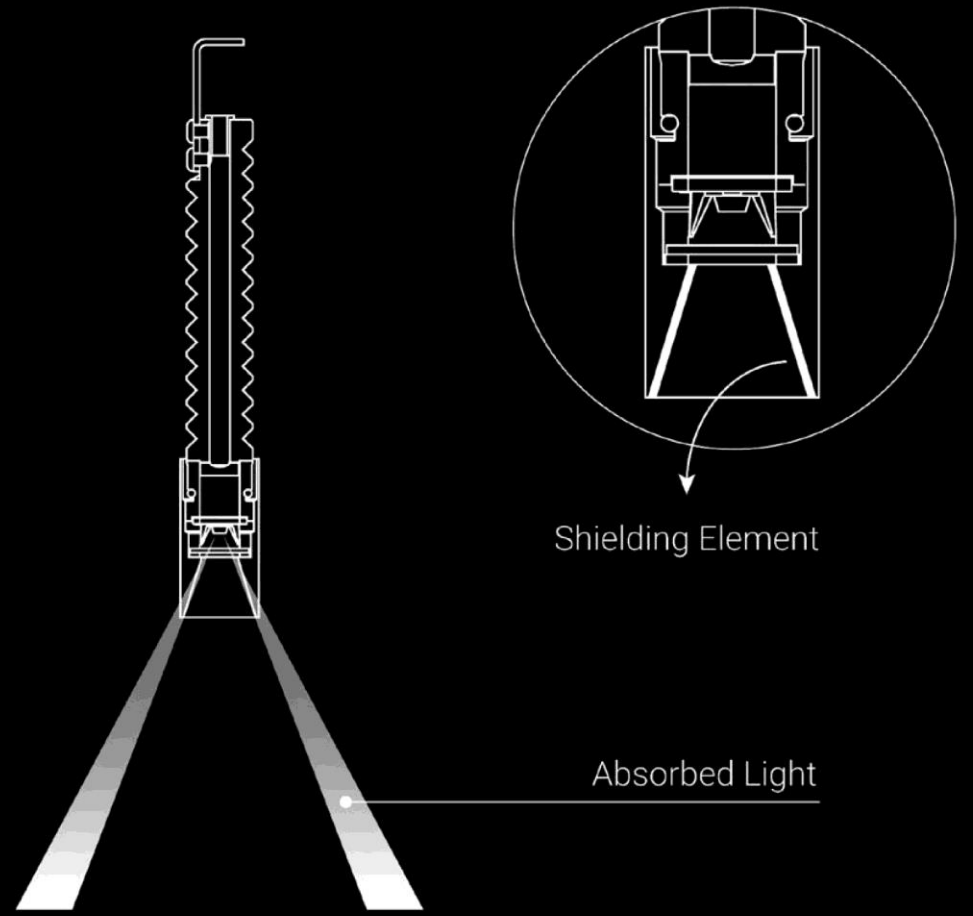

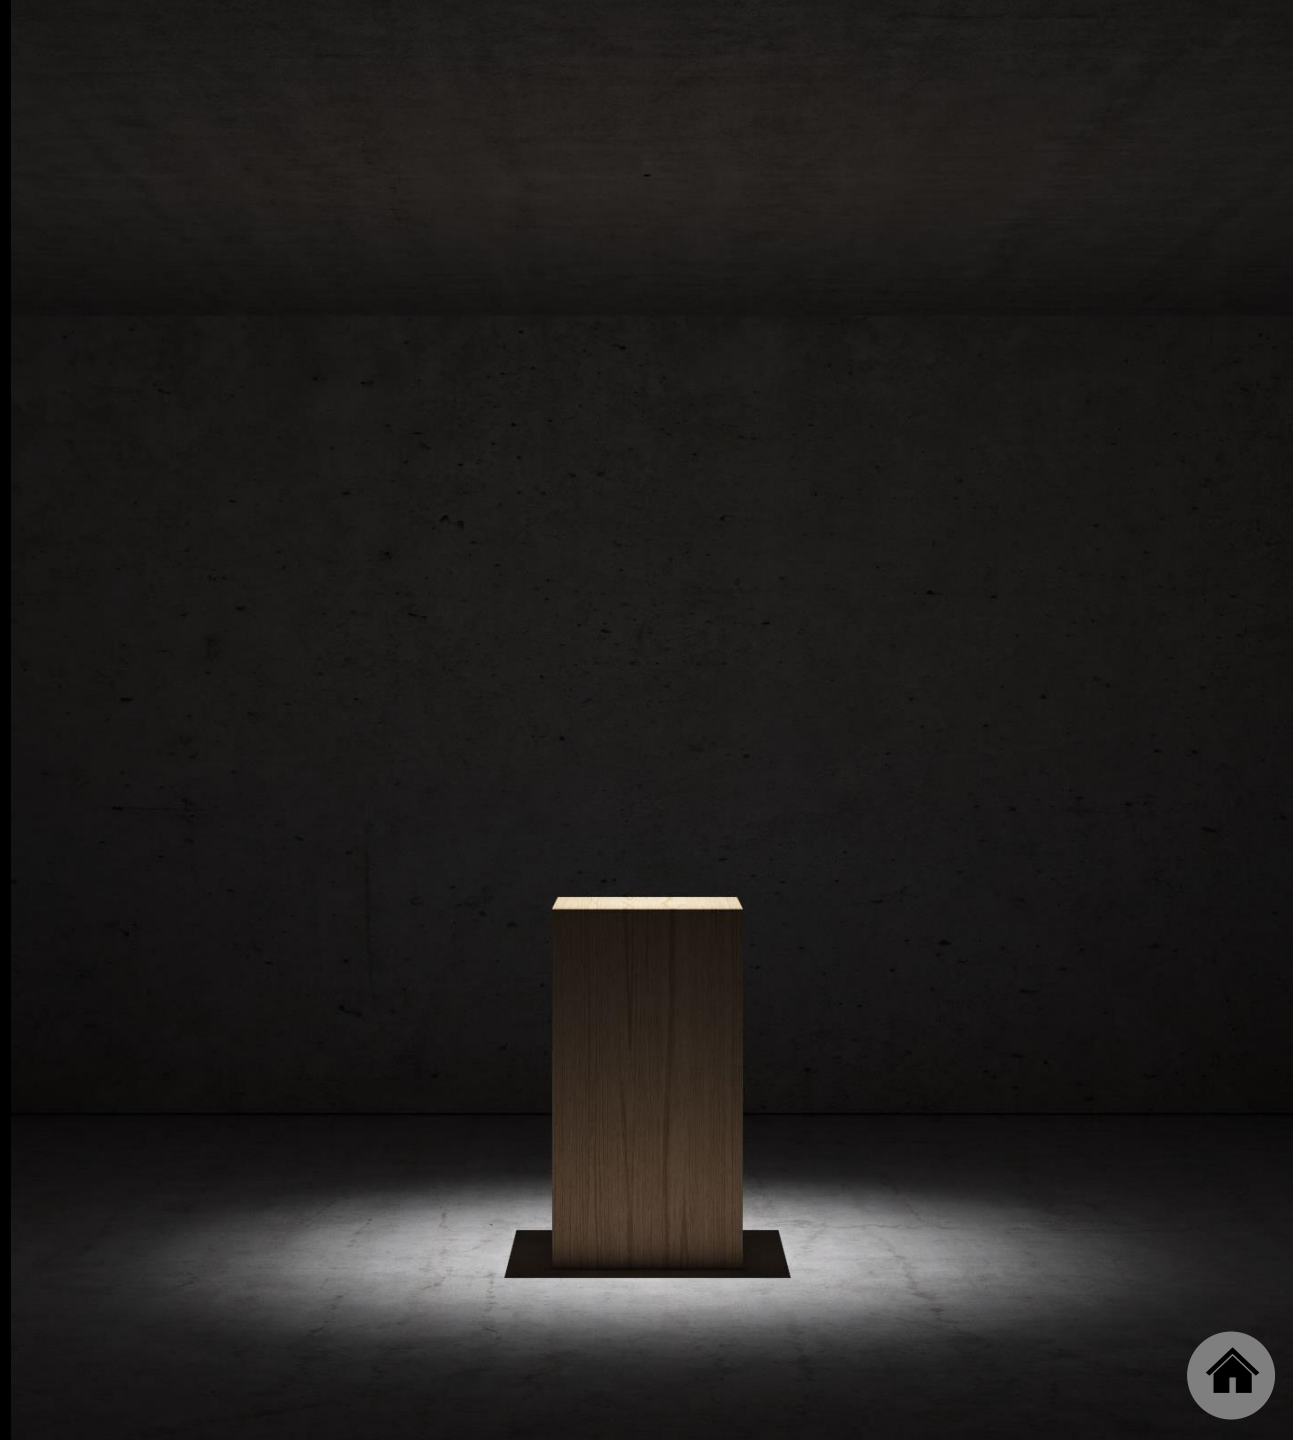

# TETATET

Design Davide Groppi - 2013

A timeless icon with an eye on the future.
Portable and rechargeable, the greatest expression of freedom.
With TeTaTeT, every table becomes a meeting place, a complete dining experience. Its light caresses those it illuminates with pure emotion.
Equipped with Touch technology and a magnetic fixing base.

davide groppi

double gruppi

# TeTaTeT

Davide Groppi / 2013

Table / Direct / Wireless

**Material** ABS - Metal - Methacrylate

**Finish** **.03** Matt White **.04** Matt Black **.18** Matt Gold

**Note** Chargeable table luminaire. Magnetic fixing stem. Touch ON/OFF. Battery life: 12 hours.

*Apparecchio illuminante da tavolo a batteria ricaricabile. Stelo con fissaggio magnetico. ON/OFF touch. Autonomia della batteria: 12 ore.*




**TeTaTeT**
2W
2700K - 165lm / 3000K - 178lm
CRI >90
ON/OFF
Driver with plug included
CE IP20

| | |
|---|---|
| Matt White - 2700K - ON/OFF | 1A0310300.27.00 |
| Matt White - 3000K - ON/OFF | 1A0310300.30.00 |
| Matt Black - 2700K - ON/OFF | 1A0310400.27.00 |
| Matt Black - 3000K - ON/OFF | 1A0310400.30.00 |
| Matt Gold - 2700K - ON/OFF | 1A0311800.27.00 |
| Matt Gold - 3000K - ON/OFF | 1A0311800.30.00 |

## Optional accessories / Accessori opzionali

Drivers / Alimentatori




| Driver with plug / Alimentatore con spina | | Included |
|---|---|---|
| Matt Black | Input 110-240V - 50/60Hz<br>Output 6V DC - 1A - 6W - IP20 | 1Z0000073 |

Other accessories / Altri accessori




| Rechargeable battery / Batteria ricaricabile | | Included |
|---|---|---|
| Matt White | 4,8V DC - NiMH 4300mAh | 1A0430300.00.00 |
| Matt Black | 4,8V DC - NiMH 4300mAh | 1A0430400.00.00 |
| Matt Gold | 4,8V DC - NiMH 4300mAh | 1A0431800.00.00 |





## Optional accessories / Accessori opzionali

Other accessories / Altri accessori




| Table / Tavolino | Not included |
|---|---|
| Matt White | 1A4020300.00.00 |
| Matt Black | 1A4020400.00.00 |

# TETATET

NEW FINISHES

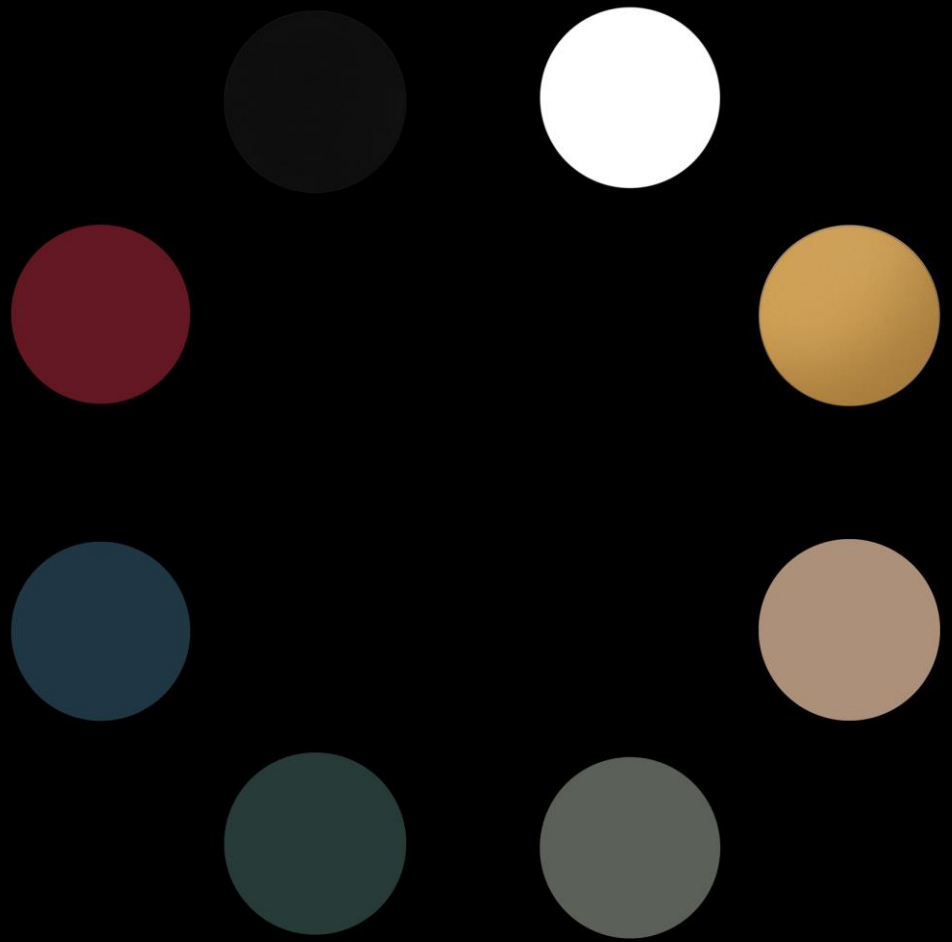

davide groppi

PLAY

# SIMBIOSI

Design Davide Groppi - 2015

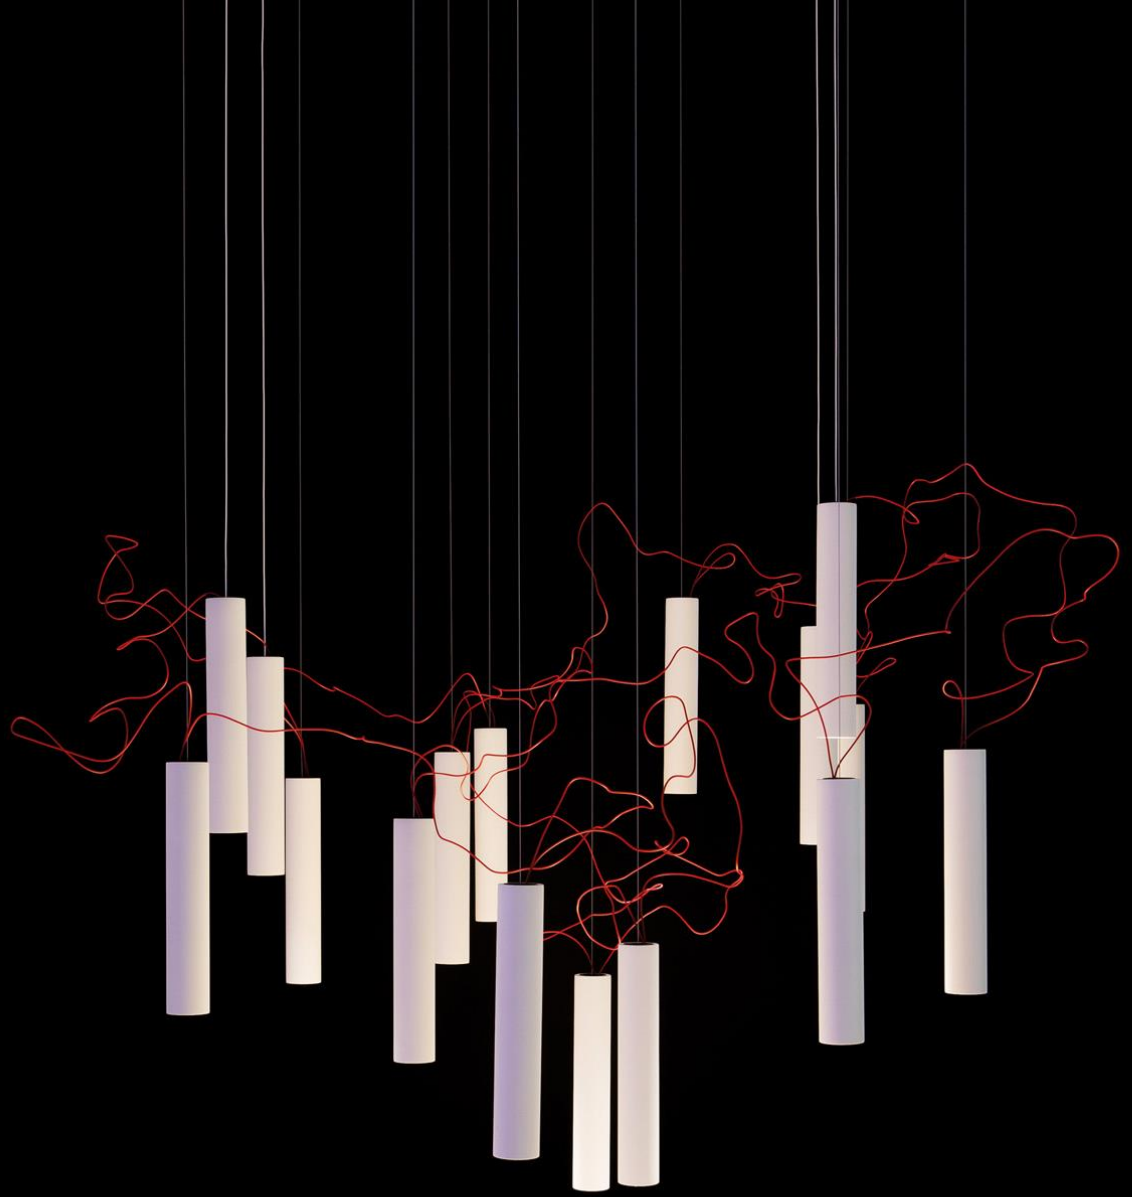

A de-structured chandelier that can be re-assembled as you like.
A conjuring trick that gives you the possibility of connecting the diodes in series using very weak electric currents with wires that are practically invisible.
The very thin wire that connects the light sources and brings them alive, one in relation to the other, is the principal component of this project.

## SIMBIOSI

Davide Groppi / 2015

Suspension / Direct / Indoor

**Material** Metal

**Finish** **.03** Matt White **.26** Total Black

**Note** Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the matt black finish. AISI 304 stainless steel suspension cables.

*Apparecchio illuminante a sospensione. Rosone bianco opaco e cavi rossi per la finitura bianco opaco. Rosone nero opaco e cavi grigio antracite per la finitura nero opaco. Cavi di sospensione in inox AISI 304.*




**SIMBIOSI**
15W
110-240V - 50/60Hz
2700K - 931lm / 3000K - 960lm
CRI >90
Driver integrated
DALI
CE IP20

| | |
|---|---|
| Matt White - 2700K - DALI | 1A2870300.27.01 |
| Matt White - 3000K - DALI | 1A2870300.30.01 |
| Total Black - 2700K - DALI | 1A2872600.27.01 |
| Total Black - 3000K - DALI | 1A2872600.30.01 |




**SIMBIOSI**
15W
110-240V - 50/60Hz
2700K - 931lm / 3000K - 960lm
CRI >90
Driver integrated
PUSH
CE IP20

| | |
|---|---|
| Matt White - 2700K - PUSH | 1A2870300.27.04 |
| Matt White - 3000K - PUSH | 1A2870300.30.04 |
| Total Black - 2700K - PUSH | 1A2872600.27.04 |
| Total Black - 3000K - PUSH | 1A2872600.30.04 |

### Optional accessories / Accessori opzionali

**Suspension kits / Kit di sospensione**

| Sloped ceiling suspension hook / Gancio di sospensione per soffitto inclinato | | Not included |
|---|---|---|
| Chrome plated - 1 Piece | 1A0530000.00.00 | |

# SIMBIOSI

SERIES CONNECTION

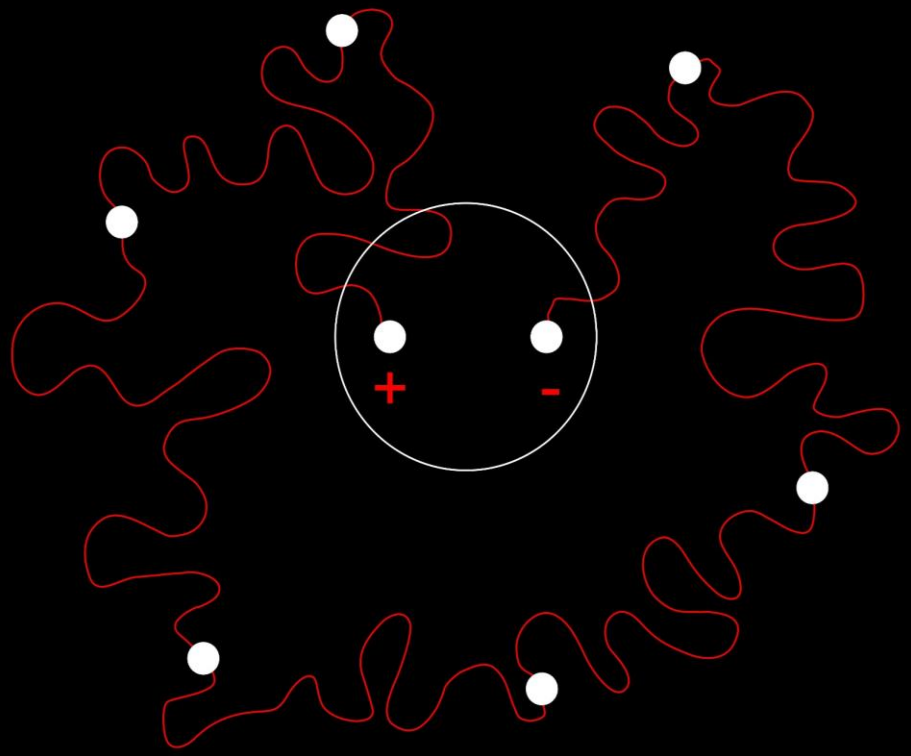

# SIMBIOSI

COMPOSITION

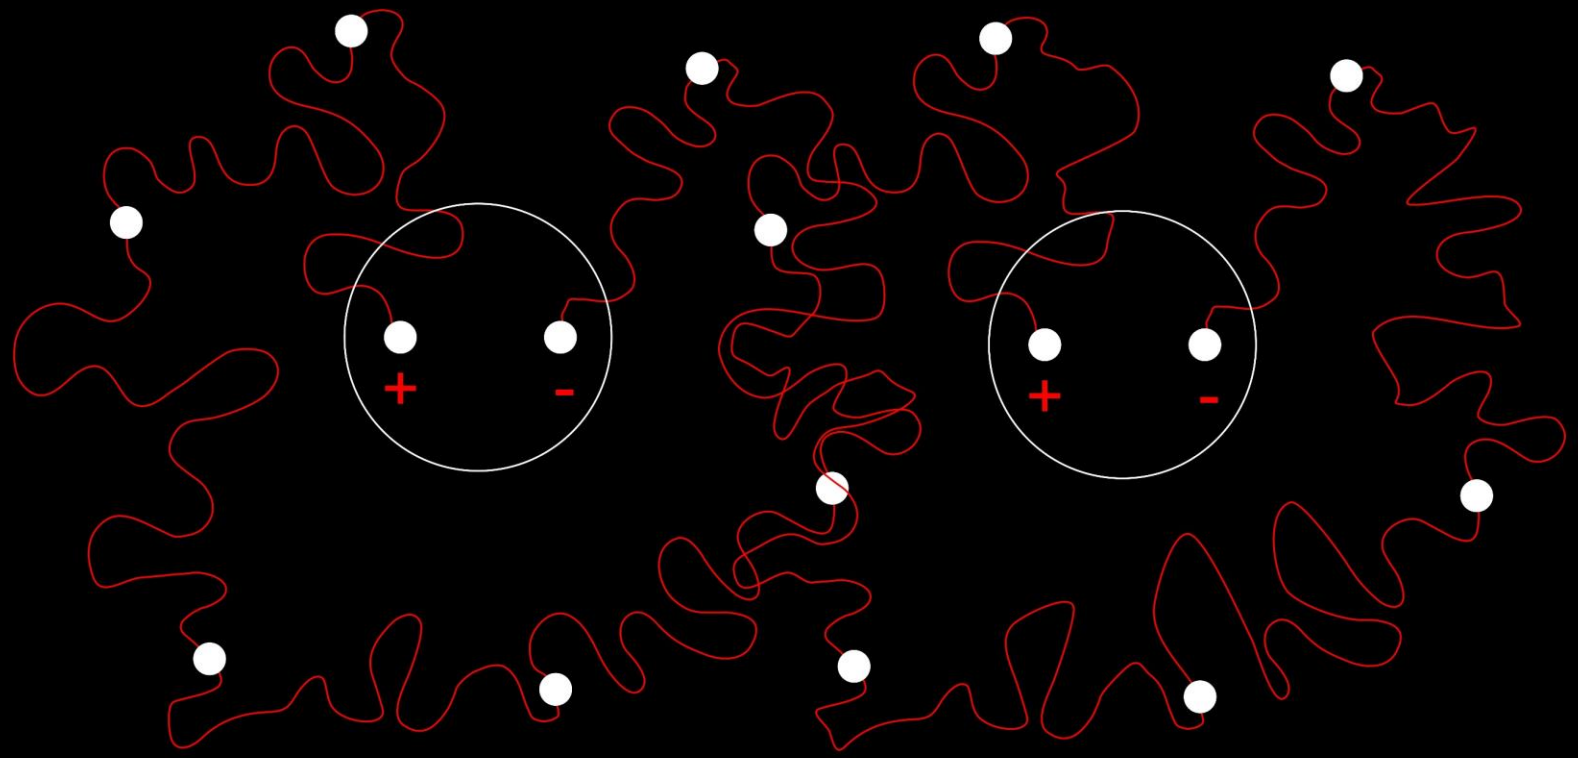

# SAMPEI

Design Davide Groppi – Enzo Calabrese – 2011

A special project, an authentic ready-made.
Obtained from a flexible fishing rod, it is a delicate and elegant sign, which brings to mind the subtle branches of a willow tree or bamboo canes floating on a light breeze.
Sampei is an unexpected gift, it is the magic of looking up, using light as a hook, and being amazed by so much weightlessness. The light is the fisherman's line, catching faces, gazes, people.
Available in 4 different heights and also in an outdoor version.

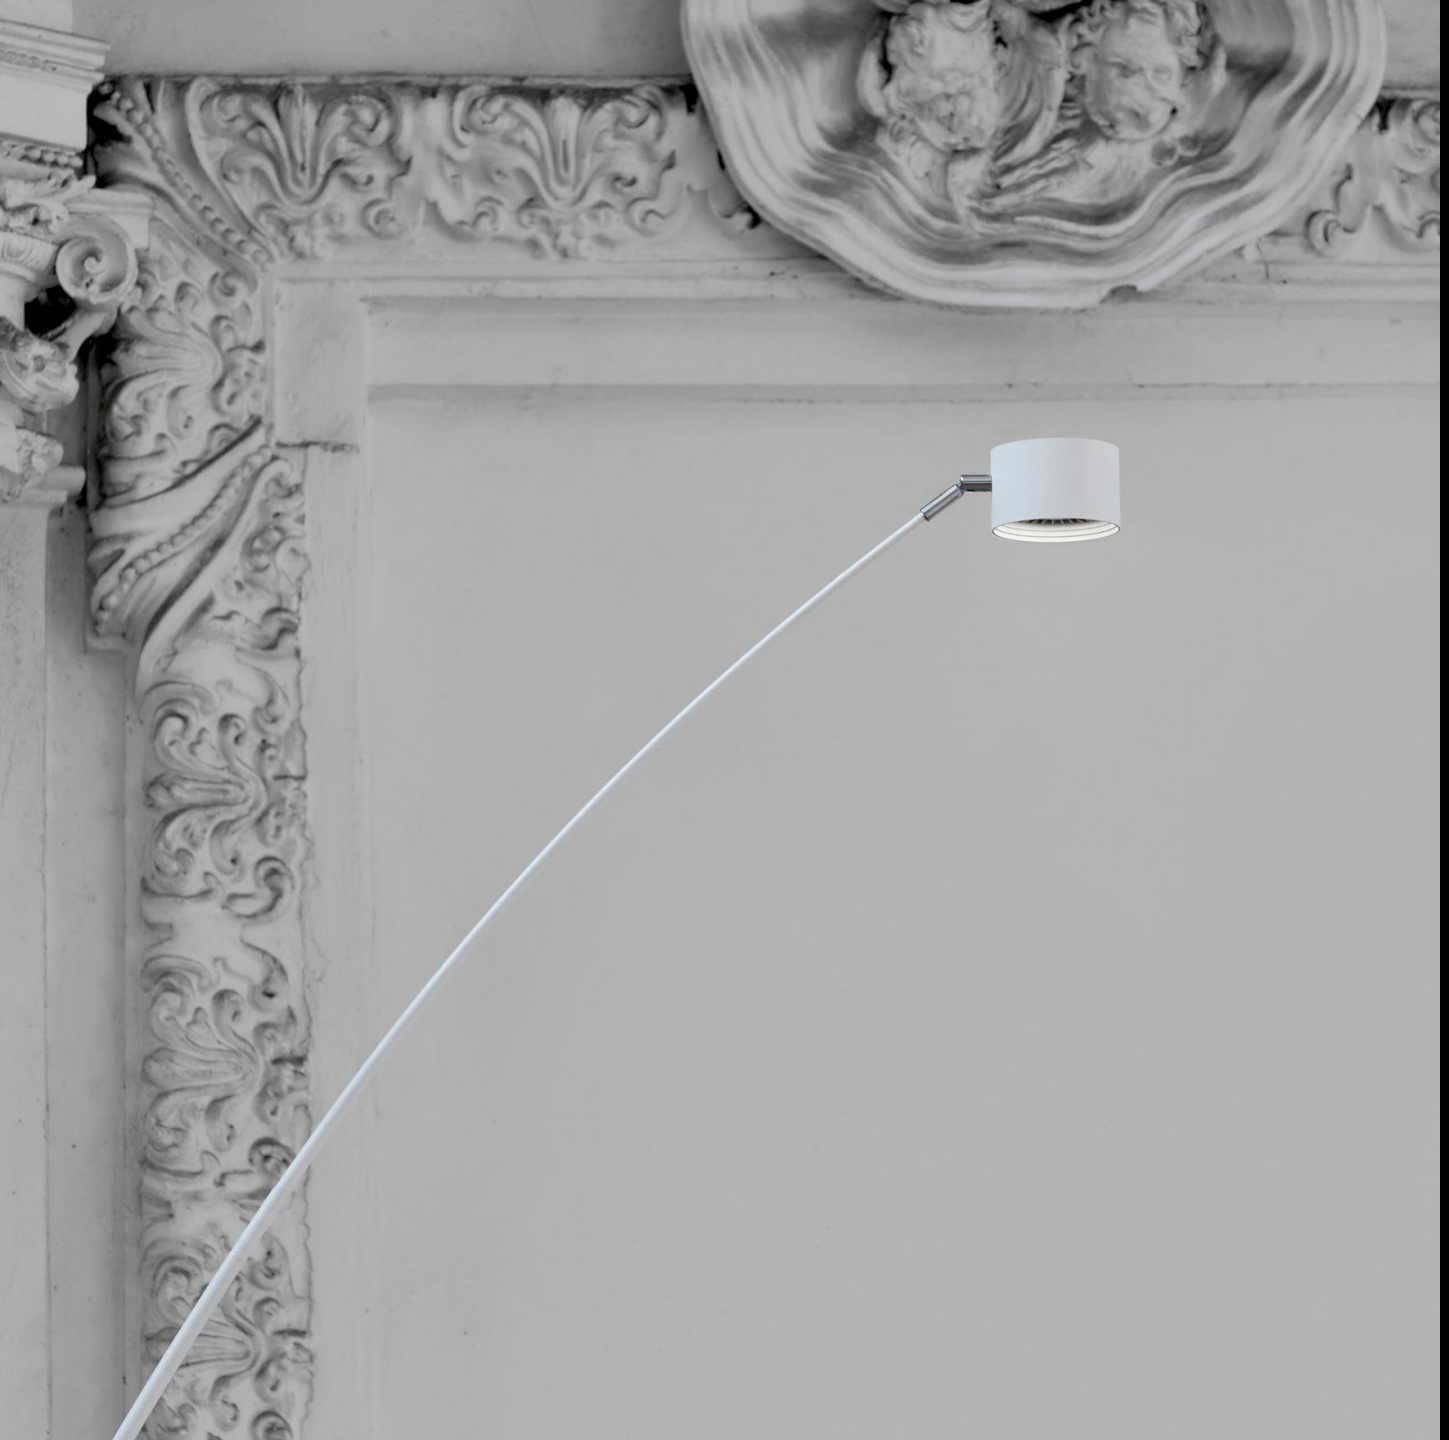

## SAMPEI

Enzo Calabrese - Davide Groppi / 2011

Floor / Direct / Indoor

**Material** Glass fiber - Metal

**Finish** **.03** Matt White **.04** Matt Black

**Note** Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish.

*Apparecchio illuminante da terra. Orientabile in tutte le direzioni. Dimmer lungo il cavo. Cavo bianco per la finitura bianco opaco e cavo nero per la finitura nero opaco.*




**SAMPEI 230**
Max 21W
220-240V - 50/60Hz
2700K - 1808lm / 3000K - 1890lm
CRI >90
Driver integrated
Dimmer on board
CE IP20

| | |
|---|---|
| Matt White - 2700K - Dimmer on board | 1A3730300.27.06 |
| Matt White - 3000K - Dimmer on board | 1A3730300.30.06 |
| Matt Black - 2700K - Dimmer on board | 1A3730400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A3730400.30.06 |




**SAMPEI 260**
Max 21W
220-240V - 50/60Hz
2700K - 1808lm / 3000K - 1890lm
CRI >90
Driver integrated
Dimmer on board
CE IP20

| | |
|---|---|
| Matt White - 2700K - Dimmer on board | 1A3740300.27.06 |
| Matt White - 3000K - Dimmer on board | 1A3740300.30.06 |
| Matt Black - 2700K - Dimmer on board | 1A3740400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A3740400.30.06 |








**SAMPEI 290**
Max 21W
220-240V - 50/60Hz
2700K - 1808lm / 3000K - 1890lm
CRI >90
Driver integrated
Dimmer on board
CE IP20

| | |
|---|---|
| Matt White - 2700K - Dimmer on board | 1A3750300.27.06 |
| Matt White - 3000K - Dimmer on board | 1A3750300.30.06 |
| Matt Black - 2700K - Dimmer on board | 1A3750400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A3750400.30.06 |




**SAMPEI 440**
Max 21W
220-240V - 50/60Hz
2700K - 1832lm / 3000K - 1915lm
CRI >90
Driver integrated
Dimmer on board
CE IP20

| | |
|---|---|
| Matt White - 2700K - Dimmer on board | 1A3760300.27.06 |
| Matt White - 3000K - Dimmer on board | 1A3760300.30.06 |
| Matt Black - 2700K - Dimmer on board | 1A3760400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A3760400.30.06 |

## SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011

Floor / Direct / Outdoor

**Material** Glass fiber - Metal

**Finish** **.03** Matt White **.04** Matt Black

**Note** Outdoor floor luminaire. Adjustable in all directions. Black cable (5 m). *Apparecchio illuminante da esterno da terra. Orientabile in tutte le direzioni. Cavo nero (5 m).*

**SAMPEI 440 OUTDOOR**
8,4W
Max 700mA DC
2700K - 639lm / 3000K - 639lm
CRI >90
Driver not included
CE IP65

| | |
|---|---|
| Matt White - 2700K | 1A3770300.27.20 |
| Matt White - 3000K | 1A3770300.30.20 |
| Matt Black - 2700K | 1A3770400.27.20 |
| Matt Black - 3000K | 1A3770400.30.20 |

### Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori




| Driver / Alimentatore | | Not included |
|---|---|---|
| 220-240V(100-127V) | 700mA/30W(15W)/IP68/ON/OFF | 1Z0241110 |

### Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione

| Driver connector IP68 / Connettore driver IP68 | | Included |
|---|---|---|
| 1 Piece | | 1A1660000.00.00 |

PLAY

# MASAI

Design Maurizio Mancini – 2015

A tribute to Alberto Giacometti and to his thin fellows...
A lamp for lighting pictures, powered by an ordinary electrical socket. The lamp has an adjustable light and it can be oriented. The lamp section is reduced to a minimum.

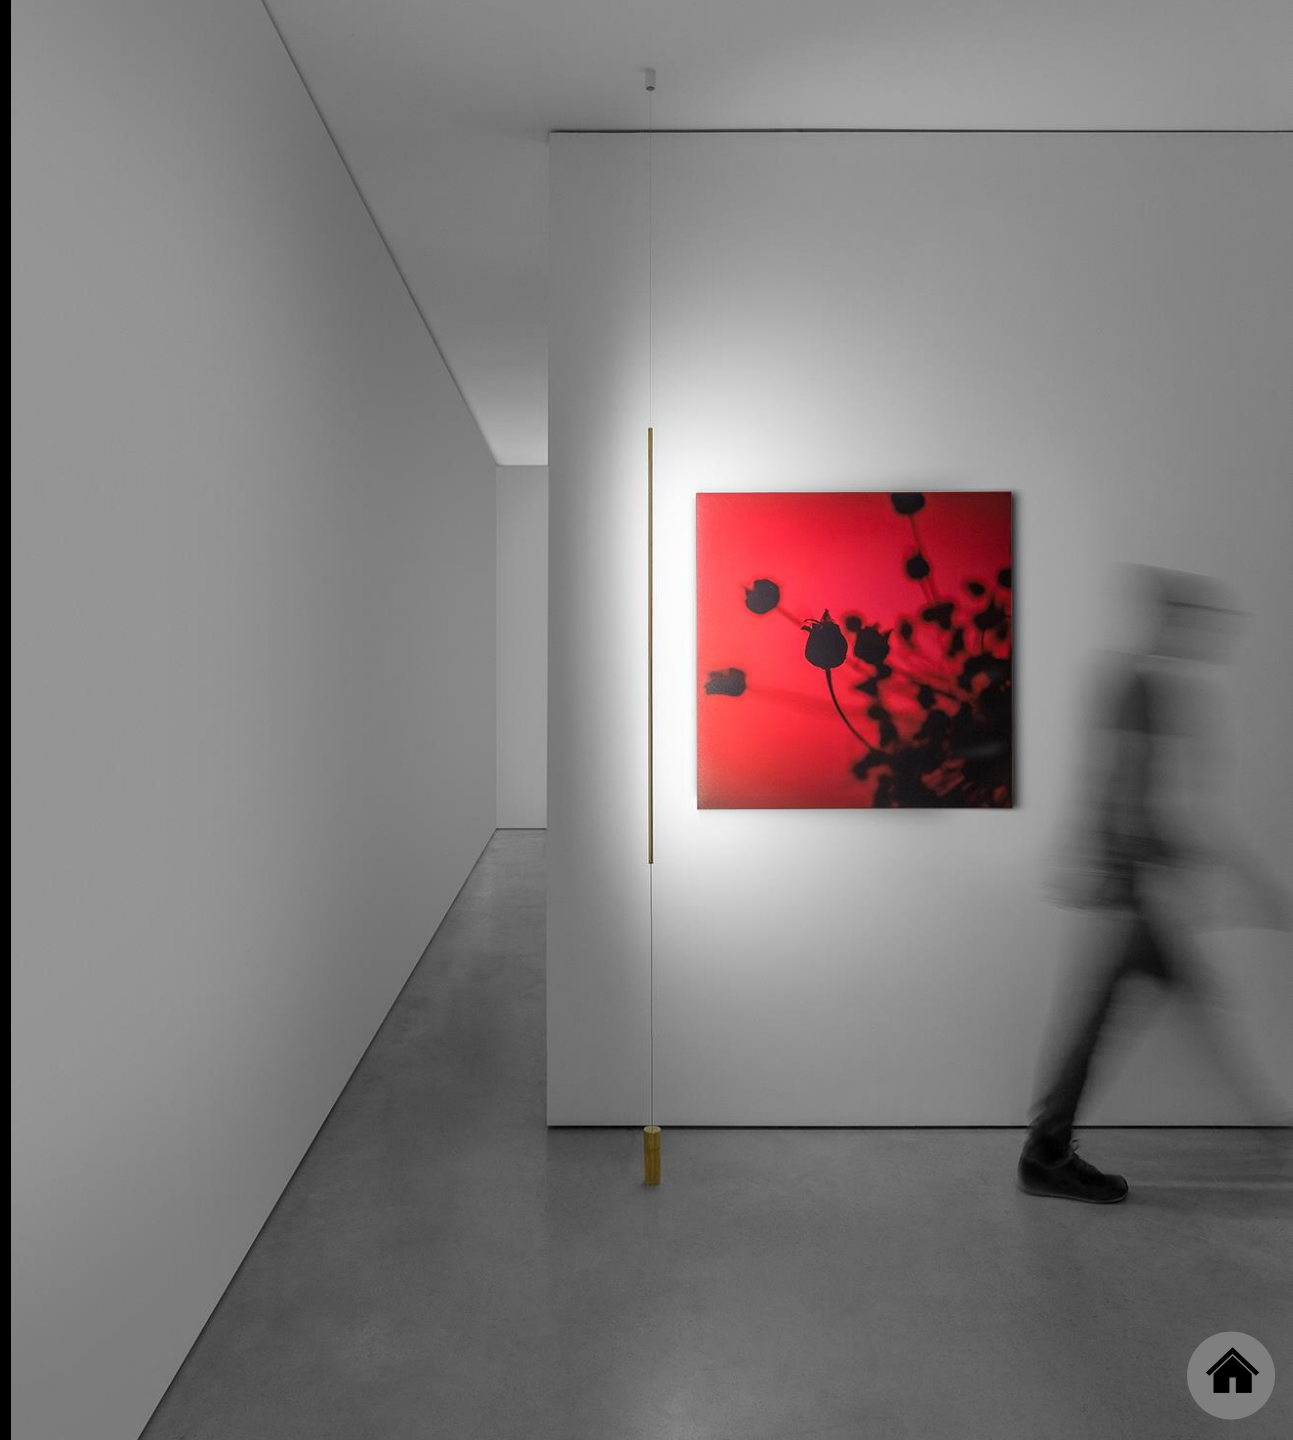

# MASAI

Maurizio Mancini / 2015

Floor-Suspension / Indirect / Indoor

**Material** Brass - Methacrylate

**Finish** **.03** Matt White **.04** Matt Black **.08** Brushed Brass

**Note** Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver.

*Apparecchio da terra con fissaggio a soffitto. Orientabile lungo l'asse verticale. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Dimmer lungo il cavo. Cavo trasparente. MASAI 2: versione con solo il cavo di alimentazione e senza driver.*




**MASAI 1**

Driver with plug version
15,5W
110-240V - 50/60Hz
2700K - 600lm / 3000K - 619lm
CRI >90
Driver integrated
Dimmer on board
CE IP20

| | |
|---|---|
| Matt White - 2700K - Dimmer on board | 1A2720300.27.06 |
| Matt White - 3000K - Dimmer on board | 1A2720300.30.06 |
| Matt Black - 2700K - Dimmer on board | 1A2720400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A2720400.30.06 |
| Brushed Brass - 2700K - Dimmer on board | 1A2720800.27.06 |
| Brushed Brass - 3000K - Dimmer on board | 1A2720800.30.06 |




**MASAI 2**

Remote driver version
13W
24V DC - 50/60Hz
2700K - 600lm / 3000K - 619lm
CRI >90
Driver not included
CE IP20

| | |
|---|---|
| Matt White - 2700K | 1A2720300.27.20 |
| Matt White - 3000K | 1A2720300.30.20 |
| Matt Black - 2700K | 1A2720400.27.20 |
| Matt Black - 3000K | 1A2720400.30.20 |
| Brushed Brass - 2700K | 1A2720800.27.20 |
| Brushed Brass - 3000K | 1A2720800.30.20 |





## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 24V/16W(15W)/IP20/DALI | MASAI 2 | 1Z0241180.24 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 24V/20W(15W)/IP20/PUSH | MASAI 2 | 1Z0240870.24 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V | 24V/20W/IP20/TRIAC/IGBT | MASAI 2 | 1Z0240850.24 |

## Optional accessories / Accessori opzionali

**Suspension kits / Kit di sospensione**

| Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato | | Not included |
|---|---|---|
| | Nickel plated - 1 Piece | 1A0510000.00.00 |

| Recessed suspension kit for 12,5 mm plasterboard / Kit di sospensione da incasso per cartongesso 12,5 mm | | Not included |
|---|---|---|
| Matt White | For suspension cables - 1 Piece<br>Plasterboard cut-out Ø 44 mm<br>Minimum space for mounting 70 mm | 1X0000300.03.00 |
| Matt Black | For suspension cables - 1 Piece<br>Plasterboard cut-out Ø 44 mm<br>Minimum space for mounting 70 mm | 1X0000400.03.00 |

| Ceiling suspension kit / Kit di sospensione da soffitto | | Not included |
|---|---|---|
| Matt White | For suspension cables - 1 Piece | 1X0010300.03.00 |
| Matt Black | For suspension cables - 1 Piece | 1X0010400.03.00 |




| Wall adapter plate / Piastra di adattamento da parete | | Not included |
|---|---|---|
| Matt White | For mounting on brick masonry walls | 1X0050300.01.00 |

| 304 Stainless steel suspension cable / Cavo di sospensione in acciaio inox AISI 304 | | Not included |
|---|---|---|
| | Lenght 10 m | 1A1680000.00.00 |

# MOON

Design Davide Groppi – 2005

Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Table and floor versions available.

## MOON

Davide Groppi / 2005

Suspension / Diffuse / Indoor

**Material** Japanese paper - PE

**Finish** **.00** Standard

**Note**

Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. MOON 60 DE: version with dual emission and on/off. Transparent cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate specifically compulsory for MOON 120 and MOON 200 models.

*Apparecchio illuminante a sospensione. Paralume in PE e carta giapponese. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Cavo bianco. MOON 60 DE: versione a doppia emissione ed accensione. Cavo trasparente.*
*Per spedizioni aerea e via nave: sacco barriera obbligatorio per tutti i modelli e cassa in legno obbligatoria per modelli MOON 120 e MOON 200.*




**MOON 60**
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Standard - ON/OFF

1A2820000.00.00




**MOON 60 DE**
Dual emission
Max 15W - E27 + Max 10W - GU10
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Standard - ON/OFF

1A2830000.00.00








**MOON 80**
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Standard - ON/OFF

1A2840000.00.00




**MOON 120**
Max 2x25W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

Standard - ON/OFF

1A2850000.00.00




**MOON 200**
Max 4x25W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
Transport excluded
CE IP20

Standard - ON/OFF

1A2860000.00.00

## MOON T

Davide Groppi / 2019

Table / Diffuse / Indoor

**Material** Japanese paper - Metal - PE

**Finish** **.00** Standard

**Note** Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer on the cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping.

*Apparecchio illuminante da tavolo. Paralume in PE e carta giapponese. Base verniciata dorata. Dimmer lungo il cavo. Cavo bianco. Sacco barriera obbligatorio per spedizioni aerea e via nave.*




**MOON T**
Max 15W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20

| | |
|---|---|
| Standard - Dimmer on board | 1A2690000.00.06 |

### Optional accessories / Accessori opzionali

**Bulbs / Lampadine**

| **LED - E27 - A60 /** | | Not included |
|---|---|---|
| | 220-240V - 11,2W - 360°<br>2700K - 1521lm - CRI >90<br>Energy Efficiency D - Dimmable | 1Y0330790 |

**Other accessories / Altri accessori**

| **Moisture barrier bag / Sacco barriera** | | Not included |
|---|---|---|
| | Packaging for air and sea shipping | 4A2690010 |

## MOON F

Davide Groppi / 2023

Floor / Diffuse / Indoor

**Material** Japanese paper - PE

**Finish** **.00** Standard

**Note**

Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable.
For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate compulsory for MOON 120 F model.

*Apparecchio illuminante da terra. Paralume in PE e carta giapponese. Base bianco opaco. Dimmer lungo il cavo. Cavo bianco.*
*Per spedizioni aerea e via nave: sacco barriera obbligatorio per tutti i modelli e cassa in legno obbligatoria per il modello MOON 120 F.*




**MOON 80 F**
Max 15W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20

Standard - Dimmer on board | 1A4880000.00.06




**MOON 120 F**
Max 2x25W - E27
100-240V - 50/60Hz
Dimmer on board
Bulb not included
CE IP20

Standard - Dimmer on board | 1A4890000.00.06

# NEURO

Design Davide Groppi – Beppe Merlano - 2013

The idea is to bring light wherever you like, starting from a socket.
A simple project, almost a revival of the old electrical wiring.
A plug, a cable, some isolators, a socket and a LED.
Outdoor version also available.

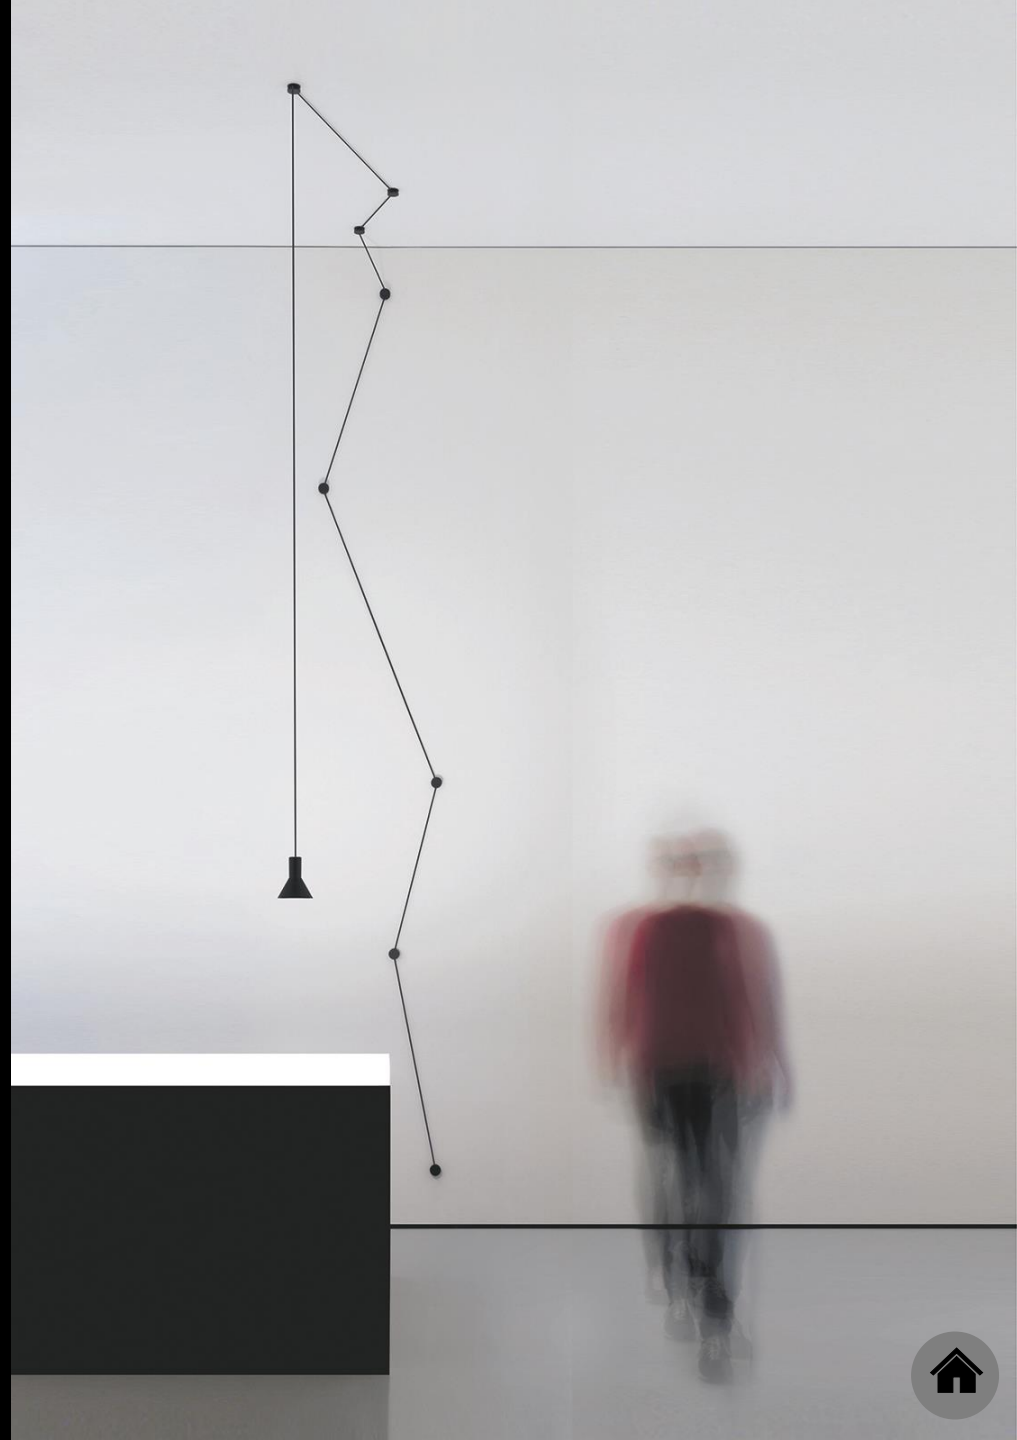

# NEURO

Davide Groppi - Beppe Merlano / 2013

Suspension / Direct / Indoor

**Material** Metal

**Finish** **.03** Matt White **.04** Matt Black

**Note** Suspension luminaire. Five cable clips included. Matt white cable clips and white cable for the matt white finish. Matt black cable clips and black cable for the matt black finish.

*Apparecchio illuminante a sospensione. Cinque bloccacavo inclusi. Bloccacavo bianco opaco e cavo bianco per la finitura bianco opaco. Bloccacavo nero opaco e cavo nero per la finitura nero opaco.*




**NEURO**
Max 15W - E27
100-240V - 50/60Hz
ON/OFF
Bulb not included
CE IP20

| | |
|---|---|
| Matt White - ON/OFF | 1A0160300.00.00 |
| Matt Black - ON/OFF | 1A0160400.00.00 |

## Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**

| Clamp / Bloccacavo | | Included |
|---|---|---|
| Matt White | 1 Piece | 1A3270300.00.00 |
| Matt Black | 1 Piece | 1A3270400.00.00 |

| Wall and ceiling rose / Rosone da parete e soffitto | | Not included |
|---|---|---|
| Matt White | | 1A3440300.00.00 |
| Matt Black | | 1A3440400.00.00 |

**Bulbs / Lampadine**

| LED - E27 - PAR30s | | Not included |
|---|---|---|
| | 220-240V - 9,5W - 25°<br>3000K - 760lm - CRI >80<br>Energy Efficiency F - Dimmable | 1Y0330730 |

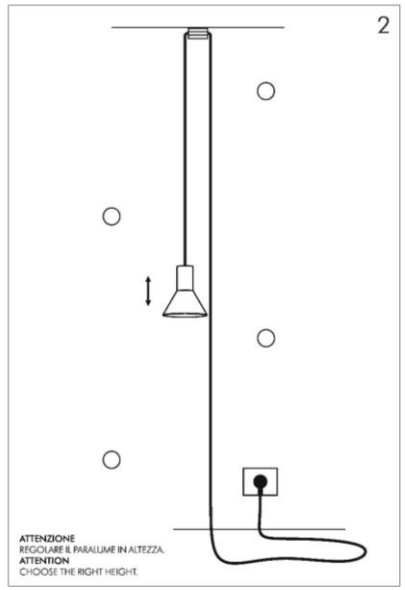


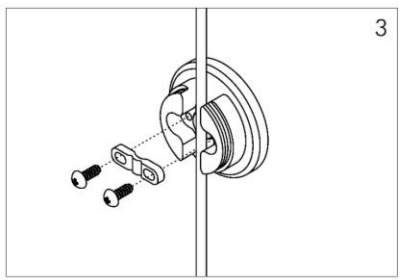


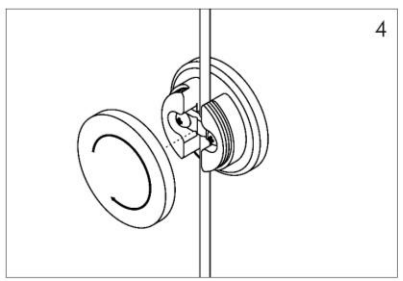


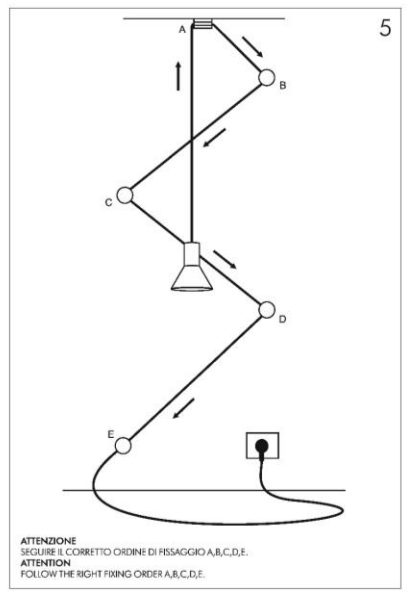

**INSTALLAZIONE CON ROSONE DA PARETE E SOFFITTO** / WALL AND CEILING ROSE INSTALLATION

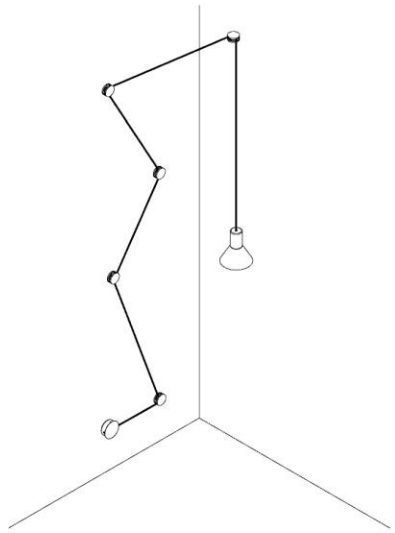

**INSTALLAZIONE CON SPINA** / POWER SUPPLY WITH PLUG INSTALLATION

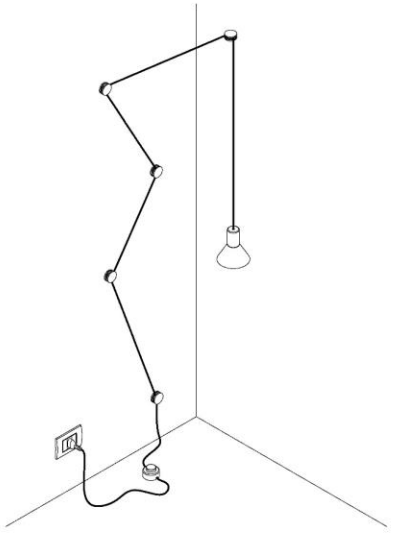

**ESEMPIO DI INSTALLAZIONE** / LAYOUT EXAMPLE

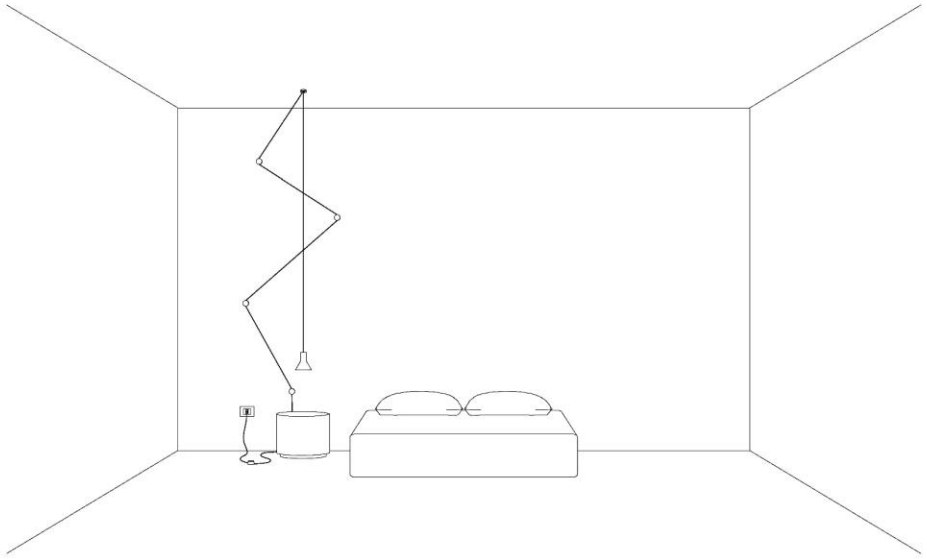

ORIENT EXPRESS

# MISS

Design Omar Carraglia – 2006

So slim and essential...
The fundamental concept of this project is minimalism. A small tube that lights the table with wonder. A real dual project: sign and light.
Luminaire available also in ENDLESS version.

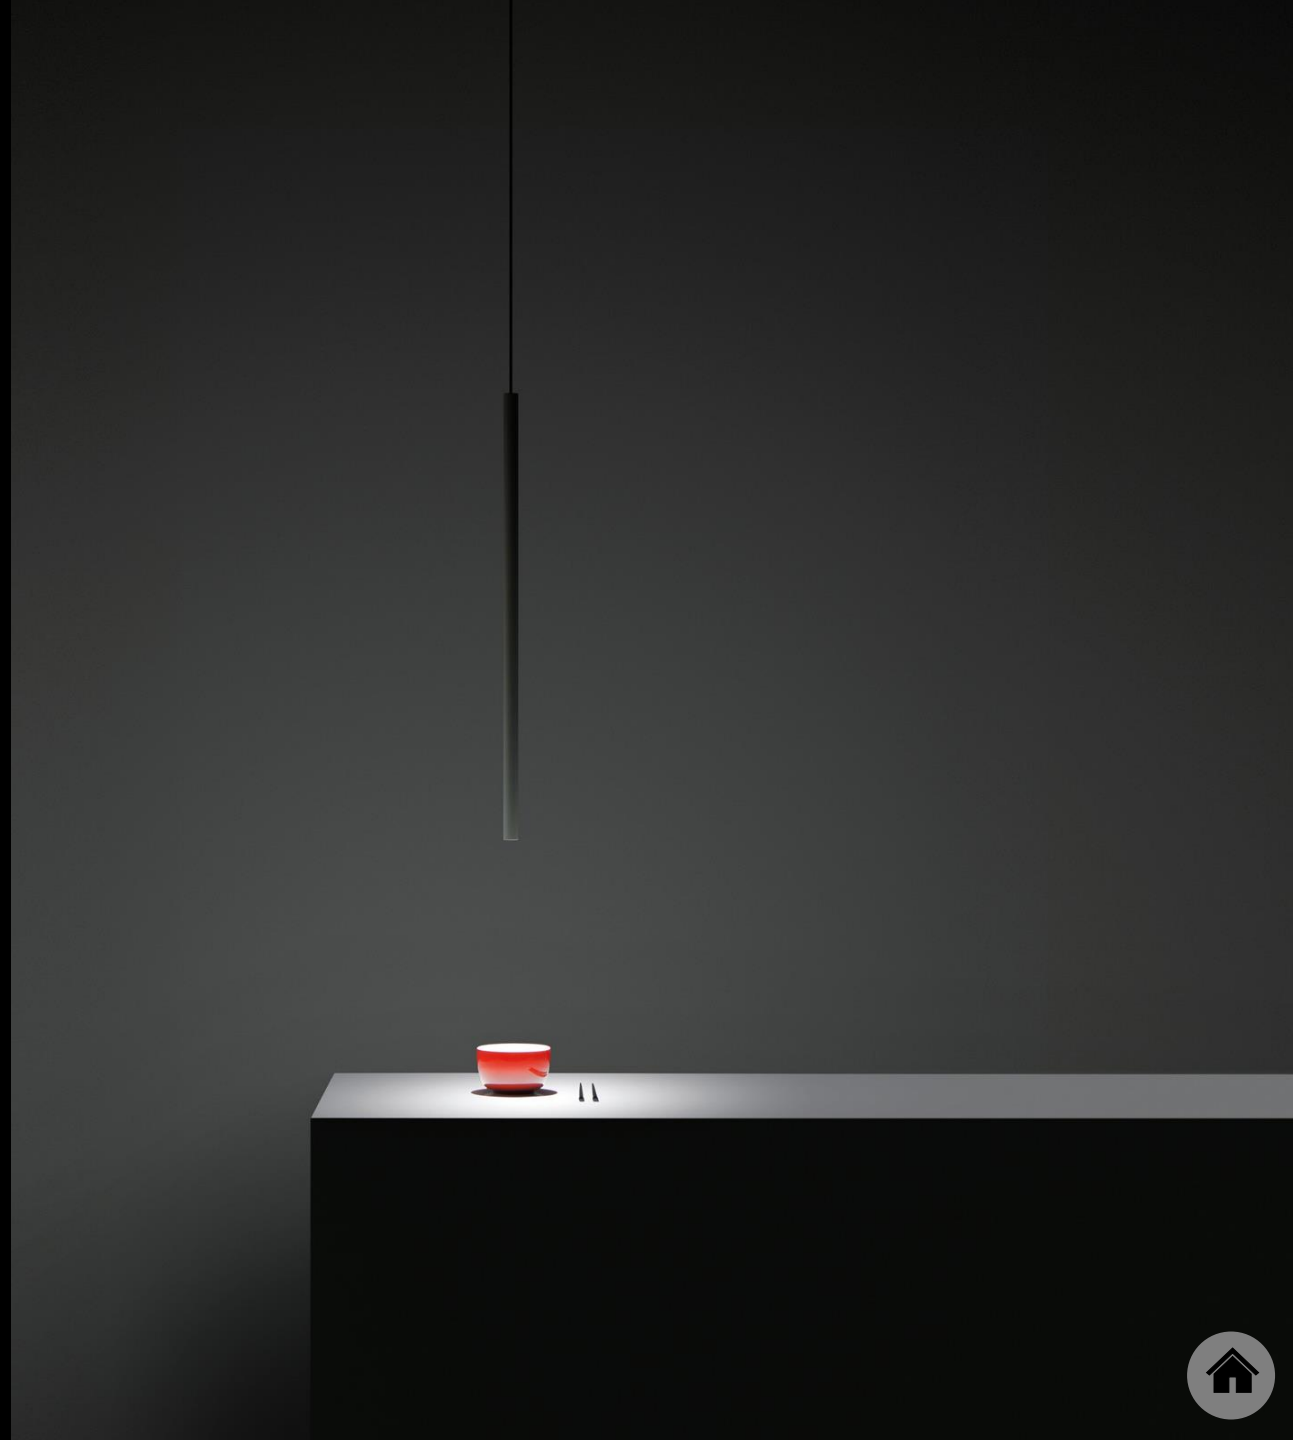

• 25 mm •

# MISS

Omar Carraglia / 2006

Suspension / Direct / Indoor

**Material** Metal

**Finish** **.03** Matt White **.04** Matt Black **.08** Brushed Brass **.26** Total Black

**Note**

Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the total black and brushed brass finish. Single rose for more than one lamp on request. MISS 2: plasterboard version with magnetic fixing flat rose. MISS ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Apparecchio illuminante a sospensione. Rosone bianco opaco e cavo bianco per la finitura bianco opaco e nero opaco. Rosone nero opaco e cavo nero per la finitura total black e ottone spazzolato. Rosone unico per più apparecchi su richiesta. MISS 2: versione per cartongesso con rosone piano a fissaggio magnetico. MISS ENDLESS: apparecchio illuminante dedicato al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*




**MISS 1**
Ceiling driver version
5,6W
100-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
ON/OFF
CE IP20

| | |
|---|---|
| Matt White - 2700K - ON/OFF | 1A2960300.27.00 |
| Matt White - 3000K - ON/OFF | 1A2960300.30.00 |
| Matt Black - 2700K - ON/OFF | 1A2960400.27.00 |
| Matt Black - 3000K - ON/OFF | 1A2960400.30.00 |
| Brushed Brass - 2700K - ON/OFF | 1A2960800.27.00 |
| Brushed Brass - 3000K - ON/OFF | 1A2960800.30.00 |
| Total Black - 2700K - ON/OFF | 1A2962600.27.00 |
| Total Black - 3000K - ON/OFF | 1A2962600.30.00 |




**MISS 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
DALI
CE IP20

| | |
|---|---|
| Matt White - 2700K - DALI | 1A2960300.27.01 |
| Matt White - 3000K - DALI | 1A2960300.30.01 |
| Matt Black - 2700K - DALI | 1A2960400.27.01 |
| Matt Black - 3000K - DALI | 1A2960400.30.01 |
| Brushed Brass - 2700K - DALI | 1A2960800.27.01 |
| Brushed Brass - 3000K - DALI | 1A2960800.30.01 |
| Total Black - 2700K - DALI | 1A2962600.27.01 |
| Total Black - 3000K - DALI | 1A2962600.30.01 |








**MISS 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
PUSH
CE IP20

| | |
|---|---|
| Matt White - 2700K - PUSH | 1A2960300.27.04 |
| Matt White - 3000K - PUSH | 1A2960300.30.04 |
| Matt Black - 2700K - PUSH | 1A2960400.27.04 |
| Matt Black - 3000K - PUSH | 1A2960400.30.04 |
| Brushed Brass - 2700K - PUSH | 1A2960800.27.04 |
| Brushed Brass - 3000K - PUSH | 1A2960800.30.04 |
| Total Black - 2700K - PUSH | 1A2962600.27.04 |
| Total Black - 3000K - PUSH | 1A2962600.30.04 |




**MISS 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
1-10V
CE IP20

| | |
|---|---|
| Matt White - 2700K - 1-10V | 1A2960300.27.03 |
| Matt White - 3000K - 1-10V | 1A2960300.30.03 |
| Matt Black - 2700K - 1-10V | 1A2960400.27.03 |
| Matt Black - 3000K - 1-10V | 1A2960400.30.03 |
| Brushed Brass - 2700K - 1-10V | 1A2960800.27.03 |
| Brushed Brass - 3000K - 1-10V | 1A2960800.30.03 |
| Total Black - 2700K - 1-10V | 1A2962600.27.03 |
| Total Black - 3000K - 1-10V | 1A2962600.30.03 |




**MISS 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
TRIAC/IGBT
CE IP20

| | |
|---|---|
| Matt White - 2700K - TRIAC/IGBT | 1A2960300.27.02 |
| Matt White - 3000K - TRIAC/IGBT | 1A2960300.30.02 |
| Matt Black - 2700K - TRIAC/IGBT | 1A2960400.27.02 |
| Matt Black - 3000K - TRIAC/IGBT | 1A2960400.30.02 |
| Brushed Brass - 2700K - TRIAC/IGBT | 1A2960800.27.02 |
| Brushed Brass - 3000K - TRIAC/IGBT | 1A2960800.30.02 |
| Total Black - 2700K - TRIAC/IGBT | 1A2962600.27.02 |
| Total Black - 3000K - TRIAC/IGBT | 1A2962600.30.02 |




**MISS 2**

Remote driver version
4W
Max 350mA DC
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included

| | |
|---|---|
| Matt White - 2700K | 1A2970300.27.20 |
| Matt White - 3000K | 1A2970300.30.20 |
| Matt Black - 2700K | 1A2970400.27.20 |
| Matt Black - 3000K | 1A2970400.30.20 |
| Brushed Brass - 2700K | 1A2970800.27.20 |
| Brushed Brass - 3000K | 1A2970800.30.20 |
| Total Black - 2700K | 1A2972600.27.20 |
| Total Black - 3000K | 1A2972600.30.20 |




**MISS ENDLESS**

Endless version only
5,5W - 0,14A
48V DC - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included
See page ENDLESS

| | |
|---|---|
| Matt White - 2700K | 1A2960300.27.40 |
| Matt White - 3000K | 1A2960300.30.40 |
| Matt Black - 2700K | 1A2960400.27.40 |
| Matt Black - 3000K | 1A2960400.30.40 |
| Brushed Brass - 2700K | 1A2960800.27.40 |
| Brushed Brass - 3000K | 1A2960800.30.40 |
| Total Black - 2700K | 1A2962600.27.40 |
| Total Black - 3000K | 1A2962600.30.40 |





## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 350mA/17W(15W)/IP20/DALI | MISS 2 | 1Z0241180.350 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 350mA/18W(15W)/IP20/PUSH - 1-10V | MISS 2 | 1Z0240870.350 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V | 350mA/17W/IP20/TRIAC/IGBT | MISS 2 | 1Z0240850.350 |

## Optional accessories / Accessori opzionali

**Suspension kits / Kit di sospensione**




| Decentralization kit / Kit decentratore | | | Not included |
|---|---|---|---|
| | | MISS 1 | 1A0360000.00.00 |




| Kit ceiling rose and decentralizer / Kit rosone e decentratore | | | Not included |
|---|---|---|---|
| Matt White | White cable 3 m included | MISS 1 | 1A0770300.00.00 |
| Matt Black | Black cable 3 m included | MISS 1 | 1A0770400.00.00 |

# CATHODE

Design Omar Carraglia – 2015

A scientific looking bulb made from mouth blown glass.
The shape brings to mind a light bulb that was never born. Think steampunk: situations in which instruments were inspired by the rudiments of electricity. The classic light bulb that has no future becomes a wonderful device made of luminous diodes. What would the past have looked like if the future had arrived first?
Luminaire available also in ENDLESS version.

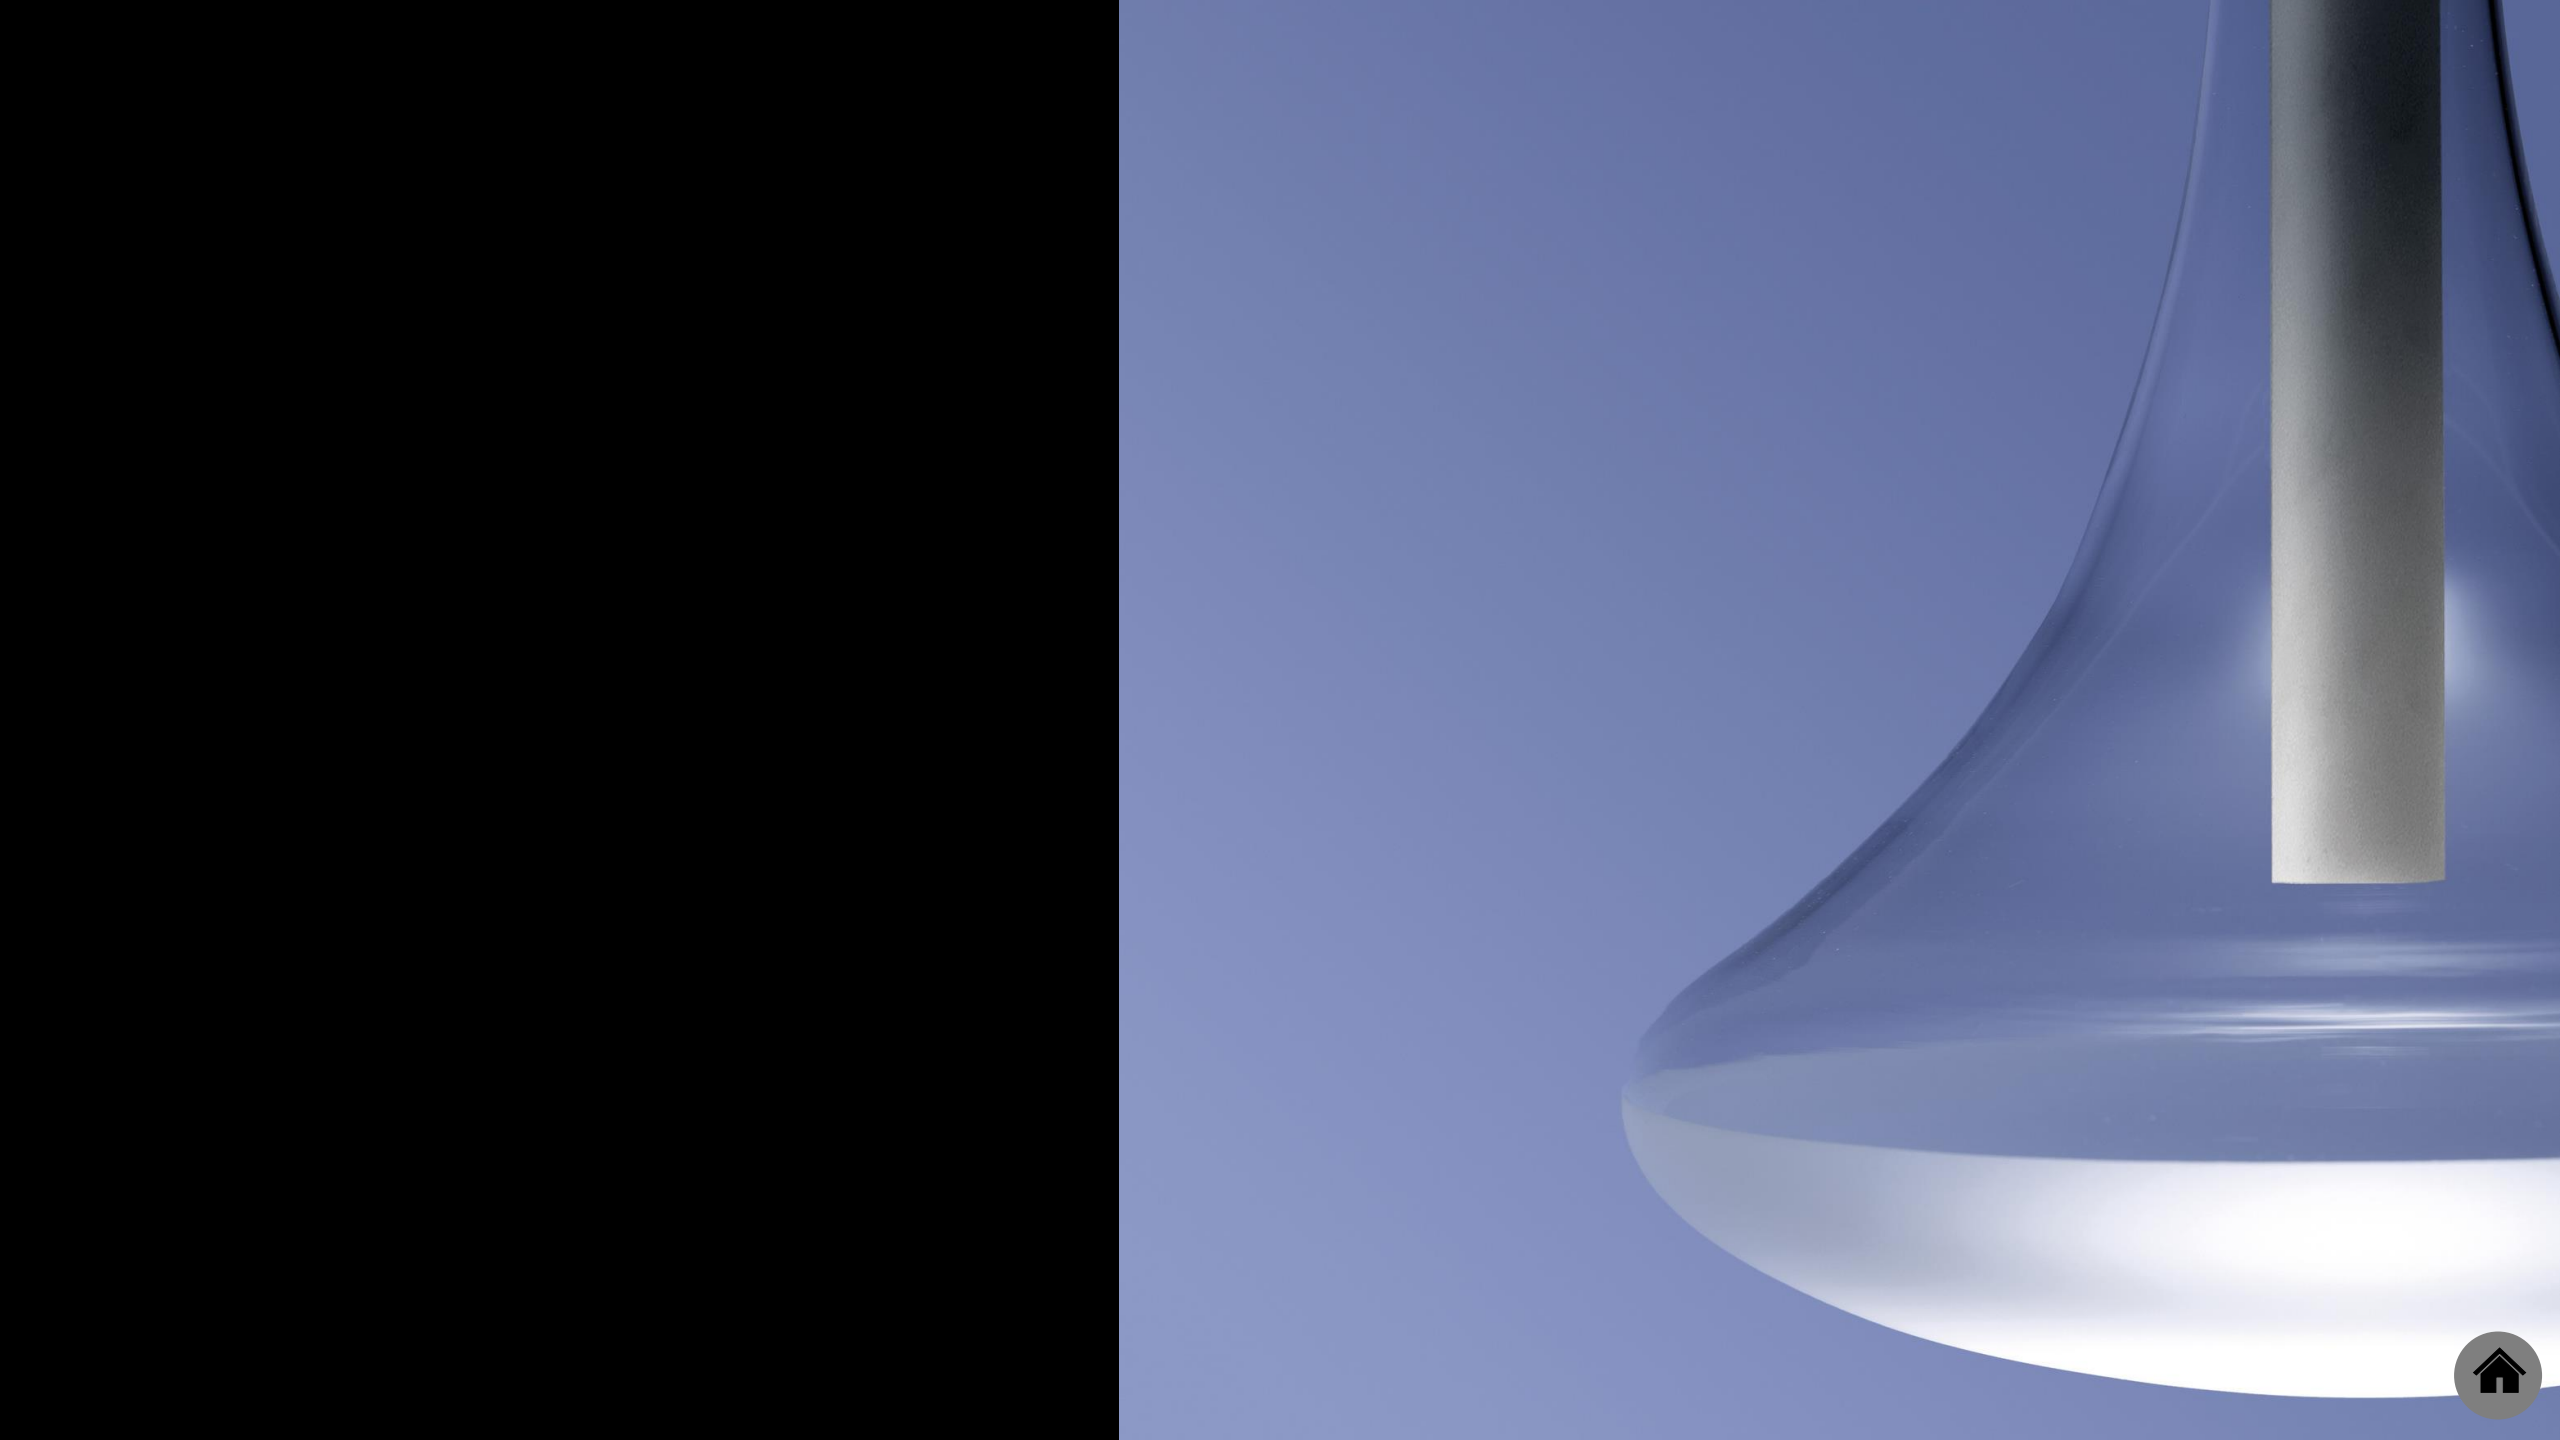

# CATHODE

Omar Carraglia / 2015

Suspension / Diffuse / Indoor

**Material** Blown glass - Metal

**Finish** **.03** Matt White **.08** Brushed Brass

**Note** Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the brushed brass finish. Single rose for more than one lamp on request. CATHODE 2: plasterboard version with magnetic fixing flat rose. CATHODE ENDLESS: luminaire dedicated to ENDLESS system (Max 48V DC - Max 150W - Max 4A). It can be used, on the same circuit, with the ENDLESS models. See page: ENDLESS.

*Apparecchio illuminante a sospensione. Diffusore in vetro soffiato. Rosone bianco opaco e cavo bianco per la finitura bianco opaco. Rosone nero opaco e cavo nero per la finitura ottone spazzolato. Rosone unico per più apparecchi su richiesta. CATHODE 2: versione per cartongesso con rosone piano a fissaggio magnetico. CATHODE ENDLESS: apparecchio illuminante dedicato al sistema ENDLESS (Max 48V DC - Max 150W - Max 4A) ed utilizzabile, sullo stesso circuito, con i modelli ENDLESS. Vedi pagina ENDLESS.*




**CATHODE 1**
Ceiling driver version
5,6W
100-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
ON/OFF
CE IP20

| | |
|---|---|
| Matt White - 2700K - ON/OFF | 1A2980300.27.00 |
| Matt White - 3000K - ON/OFF | 1A2980300.30.00 |
| Brushed Brass - 2700K - ON/OFF | 1A2980800.27.00 |
| Brushed Brass - 3000K - ON/OFF | 1A2980800.30.00 |




**CATHODE 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
DALI
CE IP20

| | |
|---|---|
| Matt White - 2700K - DALI | 1A2980300.27.01 |
| Matt White - 3000K - DALI | 1A2980300.30.01 |
| Brushed Brass - 2700K - DALI | 1A2980800.27.01 |
| Brushed Brass - 3000K - DALI | 1A2980800.30.01 |








**CATHODE 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
PUSH
CE IP20

| | |
|---|---|
| Brushed Brass - 2700K - PUSH | 1A2980800.27.04 |
| Brushed Brass - 3000K - PUSH | 1A2980800.30.04 |
| Matt White - 2700K - PUSH | 1A2980300.27.04 |
| Matt White - 3000K - PUSH | 1A2980300.30.04 |




**CATHODE 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
1-10V
CE IP20

| | |
|---|---|
| Matt White - 2700K - 1-10V | 1A2980300.27.03 |
| Matt White - 3000K - 1-10V | 1A2980300.30.03 |
| Brushed Brass - 2700K - 1-10V | 1A2980800.27.03 |
| Brushed Brass - 3000K - 1-10V | 1A2980800.30.03 |




**CATHODE 1**
Ceiling driver version
6W
110-240V - 50/60Hz
2700K - 264lm / 3000K - 284lm
CRI >90
Driver integrated
TRIAC/IGBT
CE IP20

| | |
|---|---|
| Brushed Brass - 3000K - TRIAC/IGBT | 1A2980800.30.02 |
| Matt White - 2700K - TRIAC/IGBT | 1A2980300.27.02 |
| Matt White - 3000K - TRIAC/IGBT | 1A2980300.30.02 |
| Brushed Brass - 2700K - TRIAC/IGBT | 1A2980800.27.02 |




**CATHODE 2**

Remote driver version
4W
Max 350mA DC
2700K - 264lm / 3000K - 284lm
CRI >90
Driver not included

| | |
|---|---|
| Matt White - 2700K | 1A2990300.27.20 |
| Matt White - 3000K | 1A2990300.30.20 |
| Brushed Brass - 2700K | 1A2990800.27.20 |
| Brushed Brass - 3000K | 1A2990800.30.20 |

**CATHODE ENDLESS**

ENDLESS version only
5,5W - 0,14A
48V DC
2700K - 264lm / 3000K - 284lm
CRI >90
Driver not included
See page ENDLESS

| | |
|---|---|
| Matt White - 2700K | 1A2980300.27.40 |
| Matt White - 3000K | 1A2980300.30.40 |
| Brushed Brass - 2700K | 1A2980800.27.40 |
| Brushed Brass - 3000K | 1A2980800.30.40 |





## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 350mA/17W(15W)/IP20/DALI | CATHODE 2 | 1Z0241180.350 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V(100-127V) | 350mA/18W(15W)/IP20/PUSH - 1-10V | CATHODE 2 | 1Z0240870.350 |




| Driver / Alimentatore | | | Not included |
|---|---|---|---|
| 220-240V | 350mA/17W/IP20/TRIAC/IGBT | CATHODE 2 | 1Z0240850.350 |

## Optional accessories / Accessori opzionali

**Suspension kits / Kit di sospensione**




| Decentralization kit / Kit decentratore | | | Not included |
|---|---|---|---|
| | | CATHODE 1 | 1A0360000.00.00 |




| Kit ceiling rose and decentralizer / Kit rosone e decentratore | | | Not included |
|---|---|---|---|
| Matt White | White cable 3 m included | CATHODE 1 | 1A0770300.00.00 |
| Matt Black | Black cable 3 m included | CATHODE 1 | 1A0770400.00.00 |

# FOSBURY

Design Davide Groppi – 2014

A lamp that interprets the classic theme of decentralization.
An acrobatic and apparently precarious presence, bringing light where you prefer it, starting from a simple wall socket.

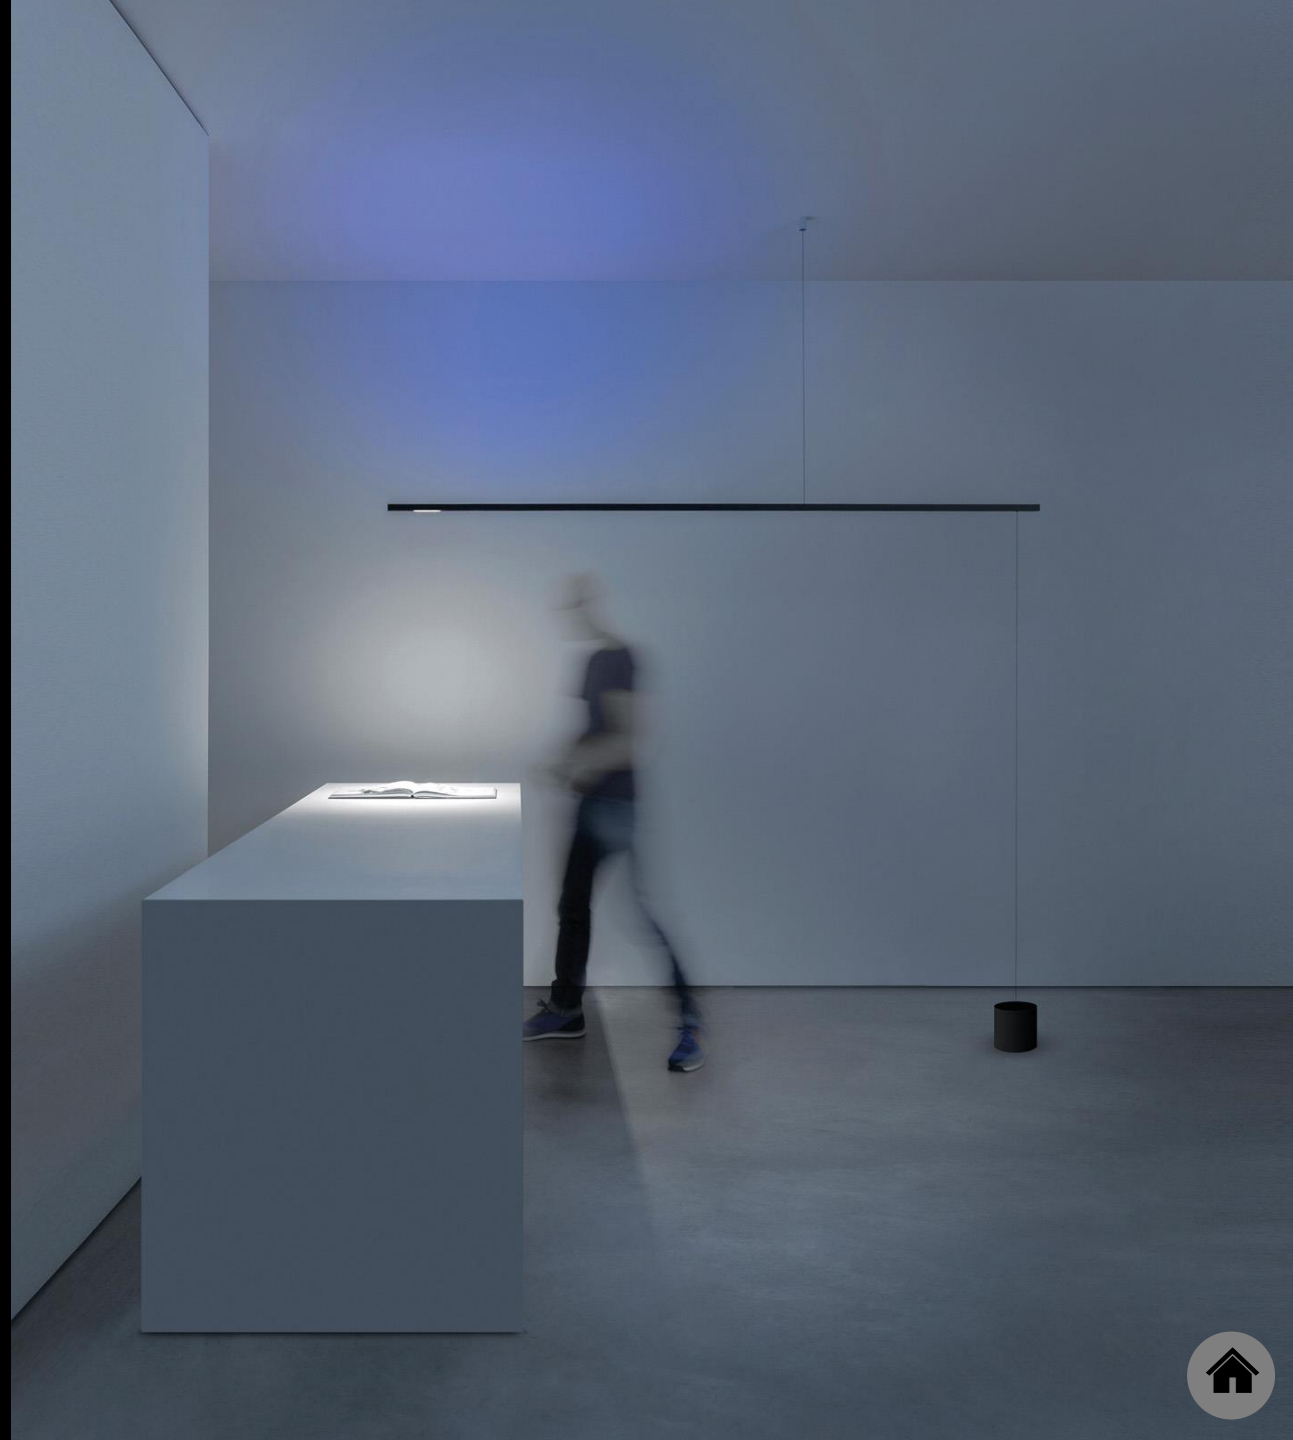

# FOSBURY

Davide Groppi / 2014

Suspension / Direct-Indirect / Indoor

**Material** Metal

**Finish** **.04** Matt Black

**Note** Suspension luminaire with floor support. Matt white rose. AISI 304 stainless steel suspension cable. Dual emission. Indirect blue light. Transparent cable.

*Apparecchio illuminante a sospensione con appoggio a terra. Rosone bianco opaco. Cavo di sospensione in inox AISI 304. Doppia emissione. Luce indiretta blu. Cavo trasparente.*




**FOSBURY**
23W
220-240V - 50/60Hz
2700K - Down 765lm - Up 59lm /
3000K - Down 823lm - Up 59lm
CRI >90
UGR <19
Driver integrated
ON/OFF
CE IP20

| | |
|---|---|
| Matt Black - 2700K - ON/OFF | 1A2590400.27.00 |
| Matt Black - 3000K - ON/OFF | 1A2590400.30.00 |

## Optional accessories / Accessori opzionali

**Suspension kits / Kit di sospensione**

| Sloped ceiling suspension kit / Kit di sospensione per soffitto inclinato | Not included |
|---|---|
| Nickel plated - 1 Piece | 1A0510000.00.00 |




























# ORIGINE

Design Davide Groppi e Giorgio Rava – 2020

From the Latin “origo”, start, birth, source.
It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious, enigmatic but comfortable, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.
Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.
Indoor version also available.

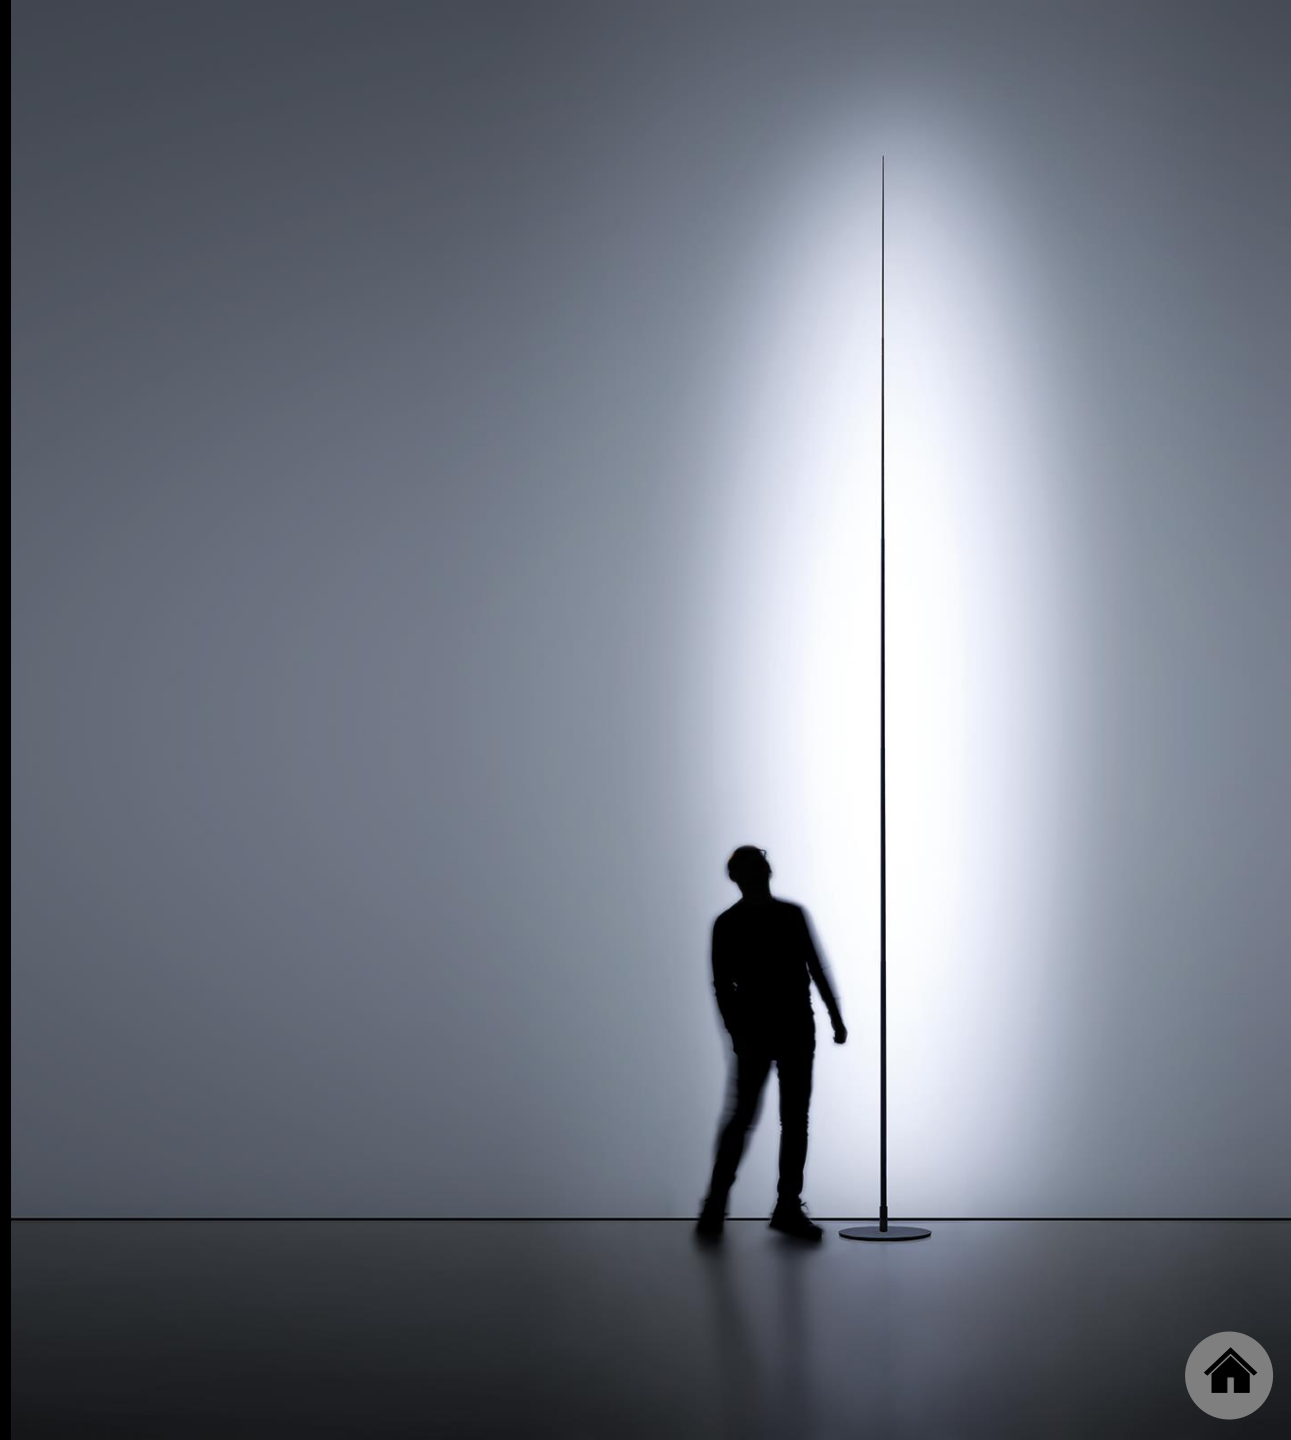

PLAY

# ORIGINE

Davide Groppi - Giorgio Rava / 2020

Floor / Indirect / Indoor

**Material** Glass fiber - Metal

**Finish** **.04** Matt Black

**Note** Floor luminaire. Dimmer on the cable. Black cable.

*Apparecchio illuminante da terra. Dimmer lungo il cavo. Cavo nero.*

**ORIGINE 290**
25W
24V DC
2700K - 1926lm / 3000K - 2075lm
CRI >80
Driver included
Dimmer on board
CE IP20

| | |
|---|---|
| Matt Black - 2700K - Dimmer on board | 1A2300400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A2300400.30.06 |

**ORIGINE 390**
30W
24V DC
2700K - 2843lm / 3000K - 3063lm
CRI >80
Driver included
Dimmer on board
CE IP20

| | |
|---|---|
| Matt Black - 2700K - Dimmer on board | 1A2310400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A2310400.30.06 |








**ORIGINE 490**
35W
24V DC
2700K - 3760lm / 3000K - 4051lm
CRI >80
Driver included
Dimmer on board
CE IP20

| | |
|---|---|
| Matt Black - 2700K - Dimmer on board | 1A2320400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A2320400.30.06 |

## ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

Outdoor / Indirect / Outdoor

**Material** Glass fiber - Metal

**Finish** **.04** Matt Black

**Note** Outdoor floor luminaire. Black cable (5 m). *Apparecchio illuminante da esterno da terra. Cavo nero (5 m).*




**ORIGINE OUTDOOR**
35W
24V DC
2700K - 2872lm / 3000K - 2930lm
CRI >80
Driver not included
CE IP65

| | |
|---|---|
| Matt Black - 2700K | 1A2480400.27.20 |
| Matt Black - 3000K | 1A2480400.30.20 |

### Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 100-240V | 24V/60W/IP67/1-10V | 1Z1120260 |

### Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**

| Driver connector IP68 / Connettore driver IP68 | | Included |
|---|---|---|
| | 1 Piece | 1A1660000.00.00 |

# GRILLO

Design Daniele Sprega – 2012

A small luminous elf that you can install in your garden or inside a vase.
A thin stem stuck into the ground and a little adjustable LED projector. For illuminating a flower, a plant or simply to accompany us along a path.
Lamp with spike.

# GRILLO

Daniele Sprega / 2012

Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal

**Finish** **.04** Matt Black

**Note** Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless steel stem. Black cable (5 m).

*Apparecchio illuminante da esterno a picchetto. Orientabile in tutte le direzioni. Stelo in inox AISI 316L. Cavo nero (5 m).*




**GRILLO**
4,2W
24V DC
2700K - 262lm / 3000K - 282lm
CRI >90
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A3570400.27.20 |
| Matt Black - 3000K | 1A3570400.30.20 |

## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 110-240V | 24V/25W/IP67/ON/OFF | 1Z1120620 |





## Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**

| Driver connector IP68 / Connettore driver IP68 | | Included |
|---|---|---|
| | 1 Piece | 1A1660000.00.00 |

| Additional stem 1 m / Stelo supplementare 1 m | | Not included |
|---|---|---|
| Standard | AISI 316L stainless steel | 1A3590000.00.00 |

**Lighting modules / Corpi illuminanti**

| Additional LED head / Testa LED supplementare | | Not included |
|---|---|---|
| Matt Black | 24V DC - 4,2W<br>2700K - 262lm - CRI >90 | 1A3580400.27.20 |
| | 24V DC - 4,2W<br>3000K - 282lm - CRI >90 | 1A3580400.30.20 |

# BELLADINOTTE

Design Maurizio Mancini – 2012

The magic of the mirror brought into the garden.
A study of camouflage. The reflective surface is used as a tool to camouflage and hide the machine to create light. The reflection of the environment makes the luminaire invisible.

## BELLADINOTTE

Maurizio Mancini / 2012

Floor / Indirect / Outdoor

**Material** Metal

**Finish** **.00** Standard

**Note** Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (5 m).

*Apparecchio illuminante da esterno a picchetto. Orientabile lungo l'asse verticale. Piano con finitura a specchio. Retro del piano a specchio verde opaco. Cavo nero (5 m).*




**BELLADINOTTE**
2x4,2W
24V DC
2700K - 262lm / 3000K - 282lm
CRI >90
Driver not included
CE IP67

| | |
|---|---|
| Standard - 2700K | 1A3560000.27.20 |
| Standard - 3000K | 1A3560000.30.20 |

### Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 110-240V | 24V/25W/IP67/ON/OFF | 1Z1120620 |

### Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**

| Driver connector IP68 / Connettore driver IP68 | | Included |
|---|---|---|
| | 1 Piece | 1A1660000.00.00 |

# IMU

Design Omar Carraglia – 2013

Light has found a home.
A lamp designed to welcome, illuminating the entrance.

# IMU

Omar Carraglia / 2013

Wall / Direct / Outdoor

**Material** Metal

**Finish** **.00** Standard

**Note** Outdoor wall luminaire. Matt black body and matt red top cover. Red hole light.

*Apparecchio illuminante da esterno da parete. Corpo nero opaco e tetto rosso opaco. Luce del foro rossa.*




**IMU**
5,5W
Max 350mA DC
3000K - 306lm
CRI >80
Driver not included
CE IP65

| | |
|---|---|
| Standard - 3000K | 1A3550000.30.20 |

## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 220-240V(100-127V) | 350mA/17W(15W)/IP68/ON/OFF | 1Z0240880 |

## Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**

| Driver connector IP68 / Connettore driver IP68 | | Included |
|---|---|---|
| 1 Piece | | 1A1660000.00.00 |

Casa
Perbellini

# BUBKA

Design Daniele Sprega – 2014

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path.

# BUBKA

Daniele Sprega / 2014

Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal

**Finish** **.00** Standard

**Note** Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (7 m).

*Apparecchio illuminante da esterno da terra. Orientabile lungo l'asse verticale. Stelo in inox AISI 316L. Cavo nero (7 m).*




**BUBKA**
8,4W
Max 700mA DC
2700K - 639lm / 3000K - 639lm
CRI >90
Driver not included
CE IP65

| | |
|---|---|
| Standard - 2700K | 1A3600000.27.20 |
| Standard - 3000K | 1A3600000.30.20 |

## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 220-240V(100-127V) | 700mA/30W(15W)/IP68/ON/OFF | 1Z0241110 |





## Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**

| Driver connector IP68 / Connettore driver IP68 | | Included |
|---|---|---|
| | 1 Piece | 1A1660000.00.00 |

| Anchoring bolt / Tirafondo | | Not included |
|---|---|---|
| | Cut-out Ø 250 mm<br>Minimum space for mounting 350 mm | 1A3620000.00.00 |

**Lighting modules / Corpi illuminanti**




| Additional LED head / Testa LED supplementare | | | Not included |
|---|---|---|---|
| Matt Black | Max 700mA DC - 8,4W<br>2700K - 639lm - CRI >90 | 1A3610400.27.20 | |
| | Max 700mA DC - 8,4W<br>3000K - 639lm - CRI >90 | 1A3610400.30.20 | |

# BUBKA BOLLARD

Daniele Sprega / 2021

Floor / Direct / Outdoor

**Material** AISI 316L Stainless Steel - Metal

**Finish** **.00** Standard

**Note** Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (9 m).

*Apparecchio illuminante da esterno da terra. Orientabile lungo l'asse verticale. Stelo in inox AISI 316L. Cavo nero (9 m).*

**BUBKA BOLLARD**
8,4W
Max 700mA DC
2700K - 350lm / 3000K - 350lm
CRI >90
Driver not included
CE IP65

| | |
|---|---|
| Standard - 2700K | 1A1440000.27.20 |
| Standard - 3000K | 1A1440000.30.20 |

## Compulsory accessories / Accessori obbligatori

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 220-240V(100-127V) | 350mA/17W(15W)/IP68/ON/OFF | 1Z0240880 |





## Optional accessories / Accessori opzionali

**Installation kits / Kit d'installazione**

| Driver connector IP68 / Connettore driver IP68 | | Included |
|---|---|---|
| | 1 Piece | 1A1660000.00.00 |

| Anchoring bolt / Tirafondo | | Not included |
|---|---|---|
| | Cut-out Ø 250 mm<br>Minimum space for mounting 350 mm | 1A3620000.00.00 |

**Lighting modules / Corpi illuminanti**




| Additional LED head / Testa LED supplementare | | | Not included |
|---|---|---|---|
| Matt Black | Max 700mA DC - 8,4W<br>2700K - 639lm - CRI >90 | 1A3610400.27.20 | |
| | Max 700mA DC - 8,4W<br>3000K - 639lm - CRI >90 | 1A3610400.30.20 | |

# BUIO

Design  Maurici Ginés – 2023

A small black dot reveals its function only when necessary.
For us the secret of light lies not in its shape, or in some technical virtuosity,
but in the choice and assumption of a method,
the method of amazement and memory.

# BUIO COMPONENTS

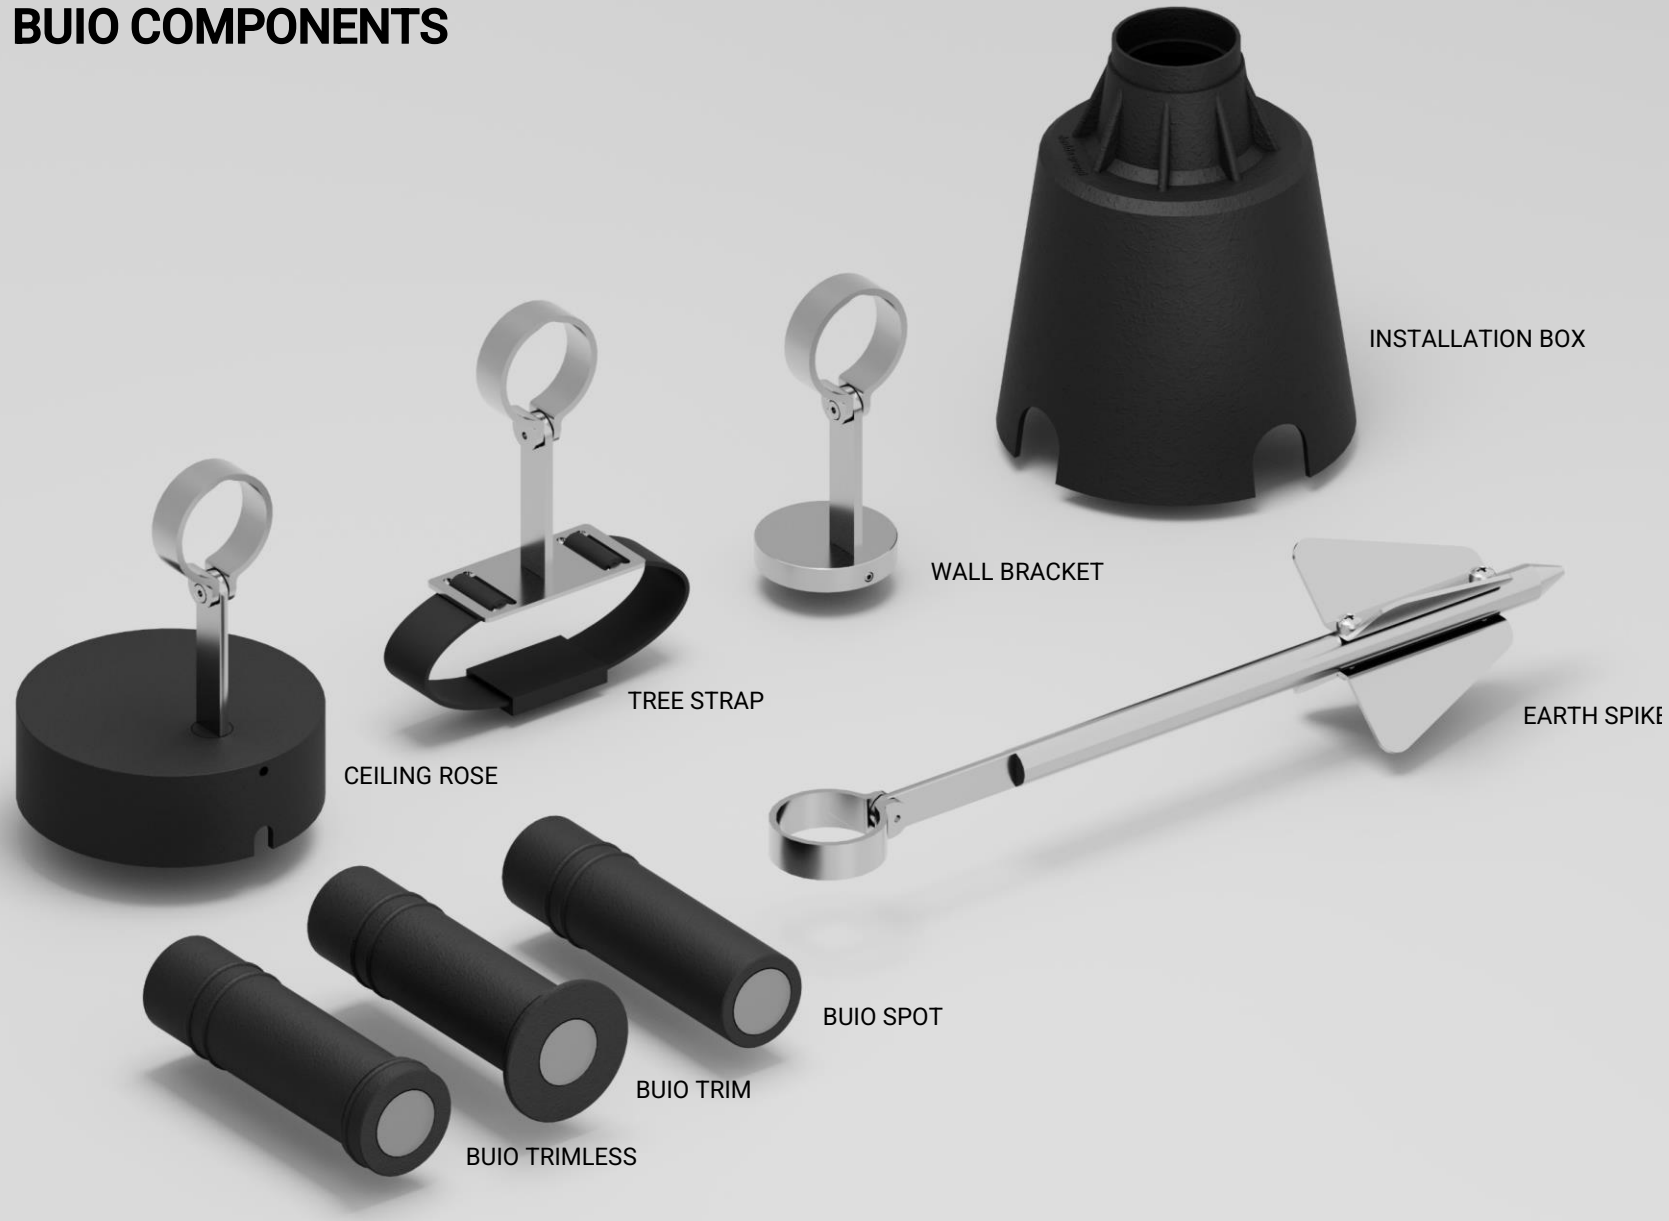

# BUIO SPOTS

**FILTER:** BLACK / TRANSPARENT

**POWERFULL:** 6,2W

**VOLTAGE:** 24V DC

**COLOR TEMPERATURE:** 2700K° 120lm / 3000° 123lm

**BEAM ANGLES:** 13° / 25° / 32° / ELLIPTICAL

**UGR**: <19 EXTRA DARK COMFORT SYSTEM

**DEGREE OF PROTECTION:** IP67

BUIO SPOT

BUIO TRIM

BUIO TRIMLESS

# BUIO SPOTS

**FILTER:** BLACK / TRANSPARENT

**POWERFULL:** 6,2W

**VOLTAGE:** 24V DC

**COLOR TEMPERATURE:** 2700K° 120lm / 3000° 123lm

**BEAM ANGLES:** 13° / 25° / 32° / ELLIPTICAL

**UGR**: <19 EXTRA DARK COMFORT SYSTEM

**DEGREE OF PROTECTION:** IP67

BUIO SPOT

BUIO TRIM

BUIO TRIMLESS

# BUIO SPOTS

**FILTER:** BLACK / TRANSPARENT

**POWERFULL:** 6,2W

**VOLTAGE:** 24V DC

**COLOR TEMPERATURE:** 2700K° 120lm / 3000° 123lm

**BEAM ANGLES:** 13° / 25° / 32° / ELLIPTICAL

**UGR**: <19 EXTRA DARK COMFORT SYSTEM

**DEGREE OF PROTECTION:** IP67

# BUIO SPOTS

**FILTER:** BLACK / TRANSPARENT

**POWERFULL:** 6,2W

**VOLTAGE:** 24V DC

**COLOR TEMPERATURE:** 2700K° 120lm / 3000° 123lm

**BEAM ANGLES:** 13° / 25° / 32° / ELLIPTICAL

**UGR**: <19 EXTRA DARK COMFORT SYSTEM

**DEGREE OF PROTECTION:** IP67

# BUIO SPOTS

**FILTER:** BLACK / TRANSPARENT

**POWERFULL:** 6,2W

**VOLTAGE:** 24V DC

**COLOR TEMPERATURE:** 2700K° 120lm / 3000° 123lm

**BEAM ANGLES:** 13° / 25° / 32° / ELLIPTICAL

**UGR**: <19 EXTRA DARK COMFORT SYSTEM

**DEGREE OF PROTECTION:** IP67

# BUIO SPOTS

**FILTER:** BLACK / TRANSPARENT

**POWERFULL:** 6,2W

**VOLTAGE:** 24V DC

**COLOR TEMPERATURE:** 2700K° 120lm / 3000° 123lm

**BEAM ANGLES:** 13° / 25° / 32° / ELLIPTICAL

**UGR**: <19 EXTRA DARK COMFORT SYSTEM

**DEGREE OF PROTECTION:** IP67

# BUIO INSTALLATION BOX

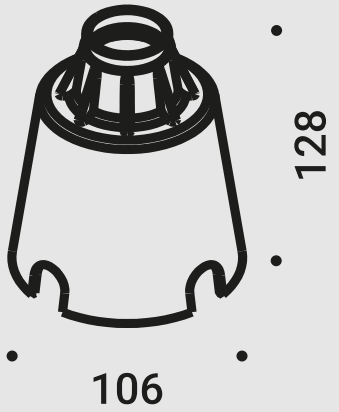


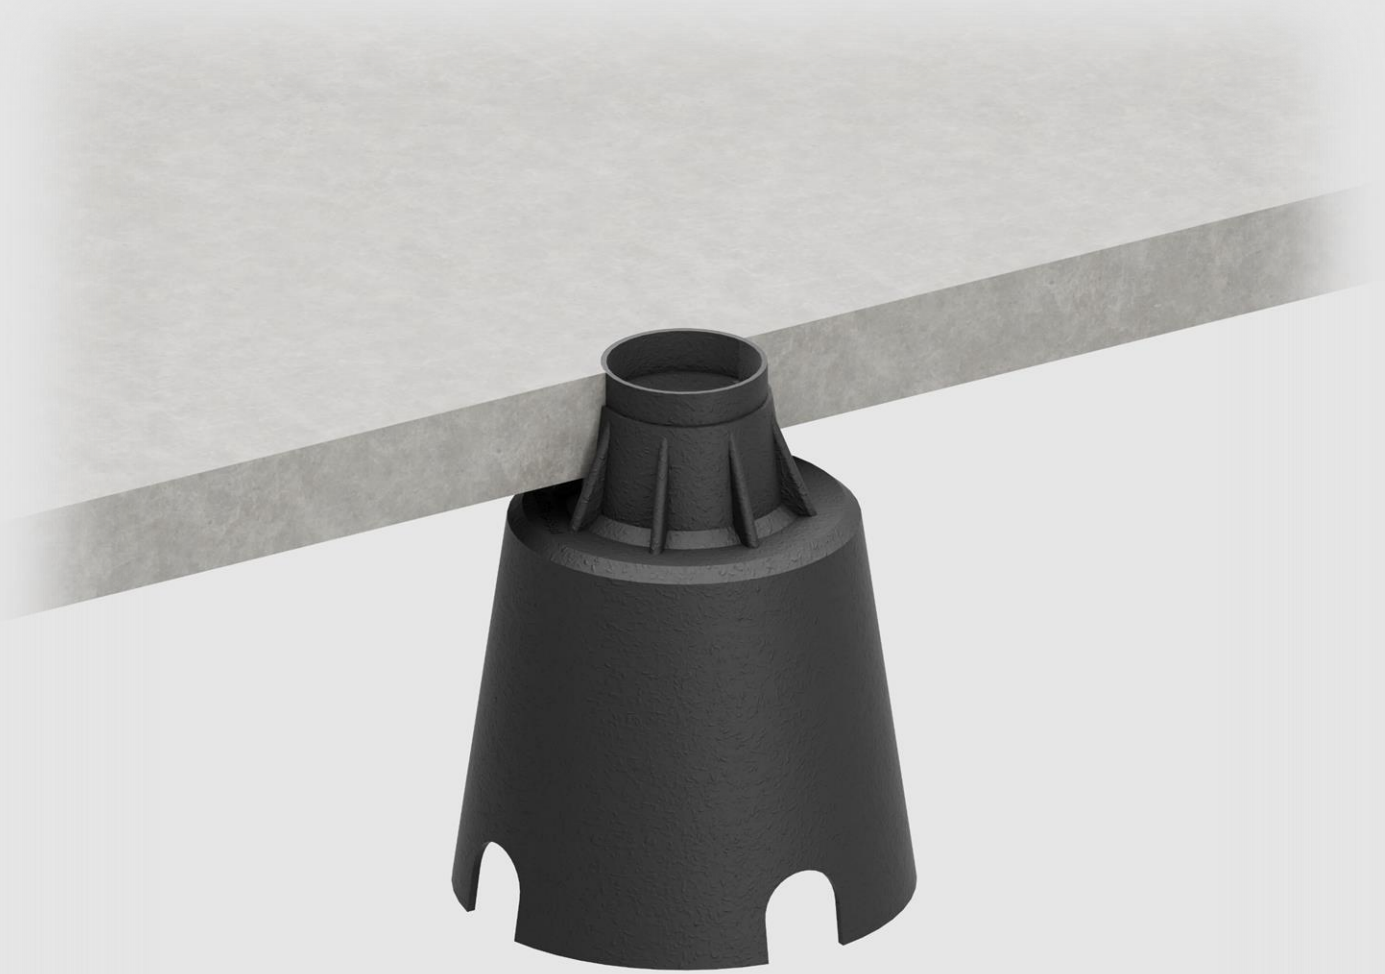

# BUIO TRIM

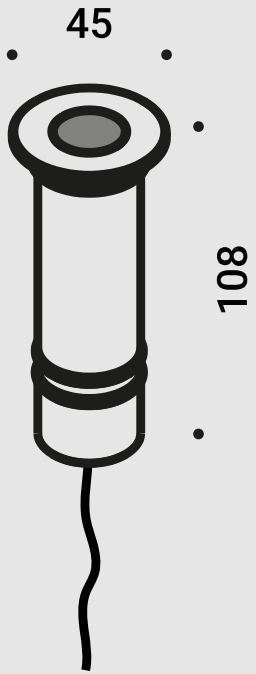


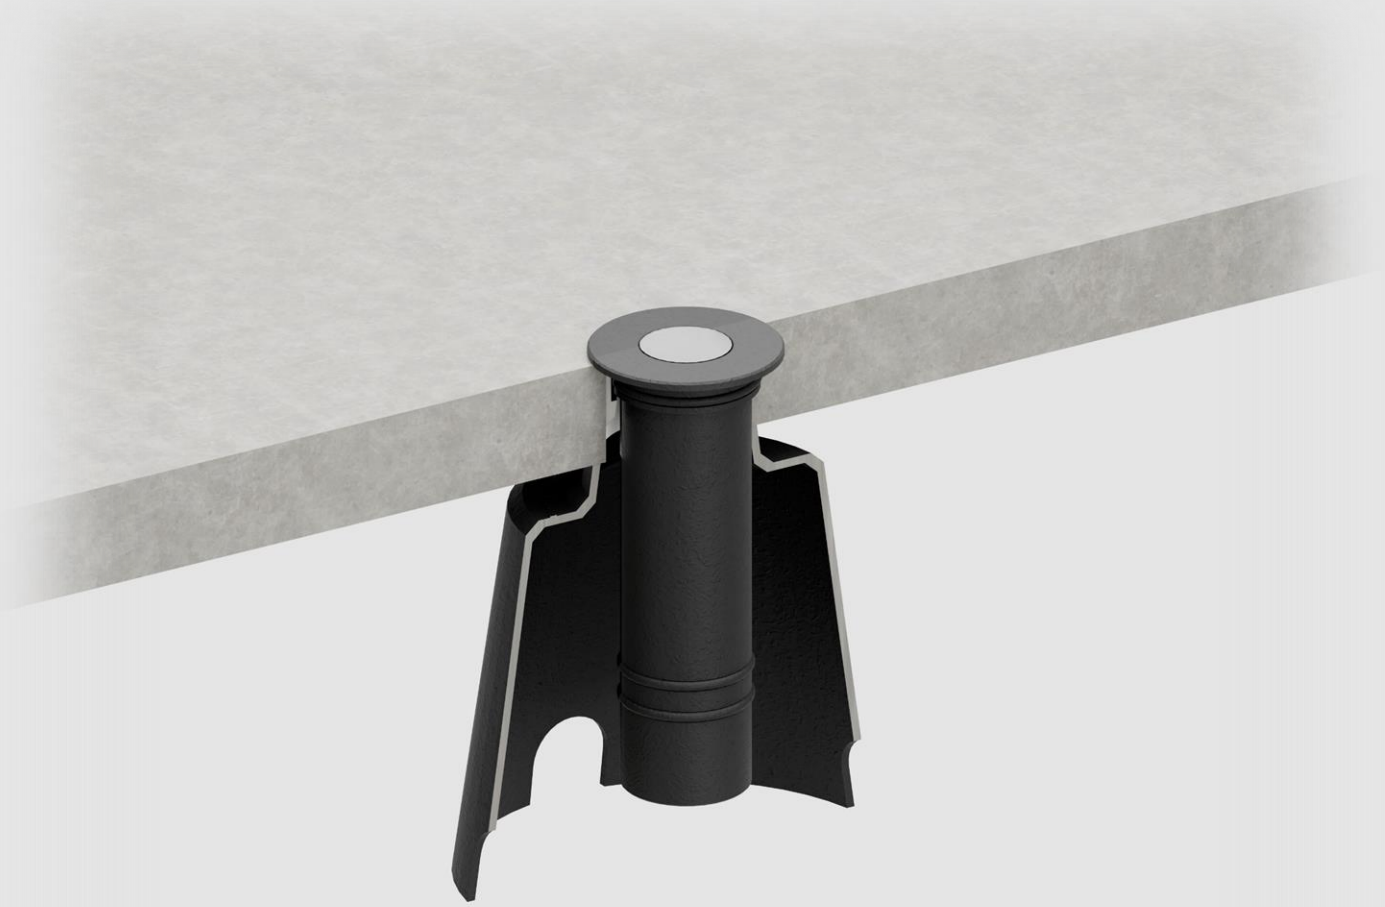

# BUIO TRIM

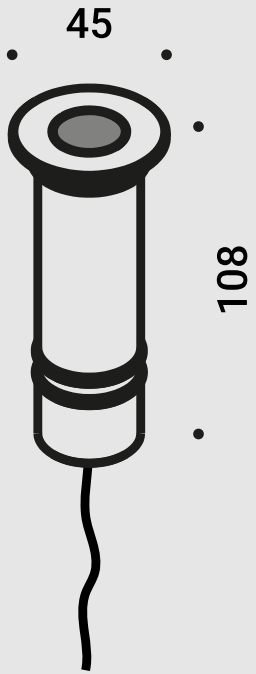


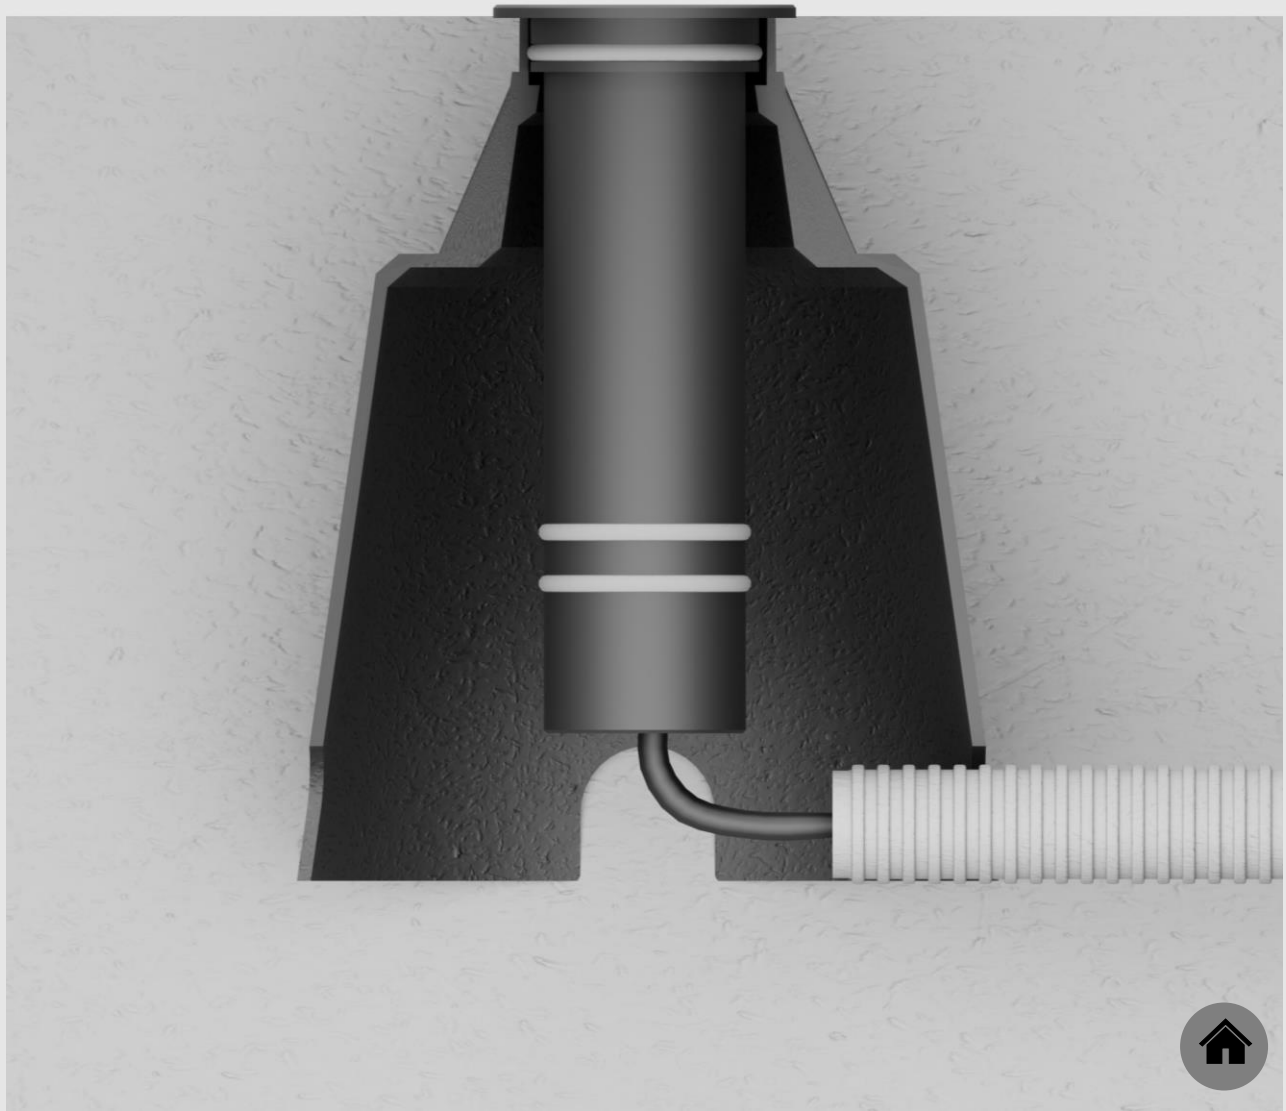

# BUIO TRIMLESS

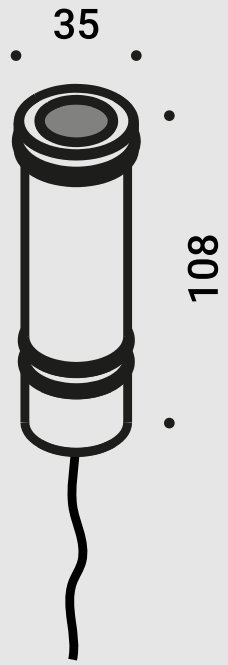


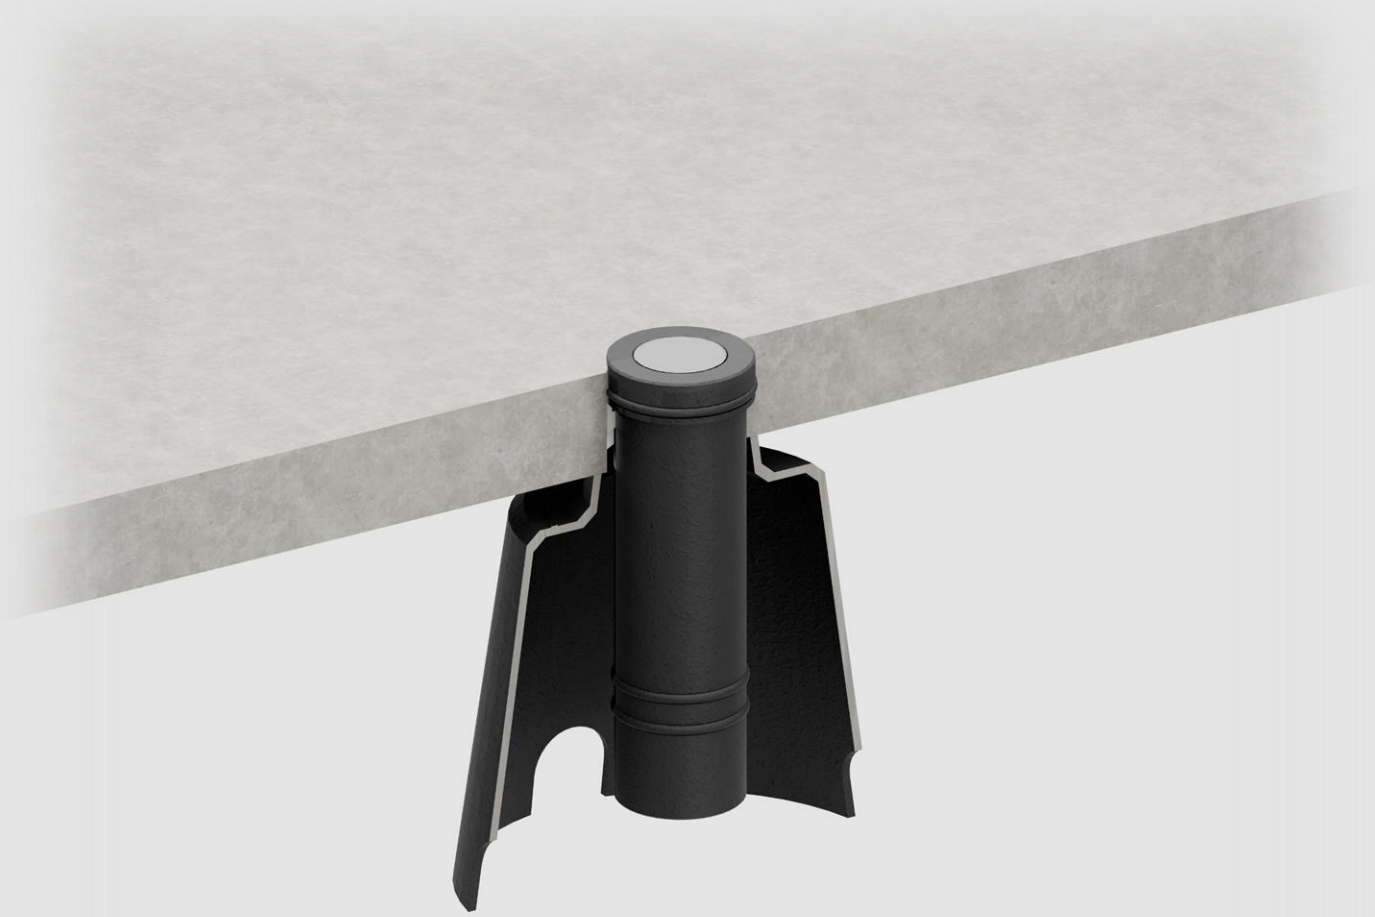

# BUIO TRIMLESS

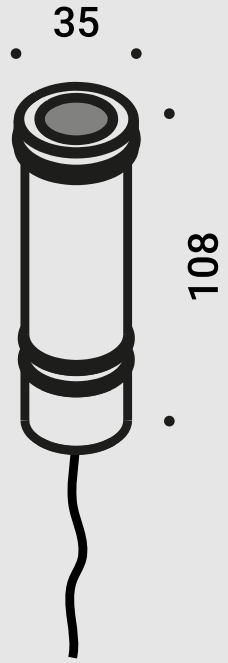


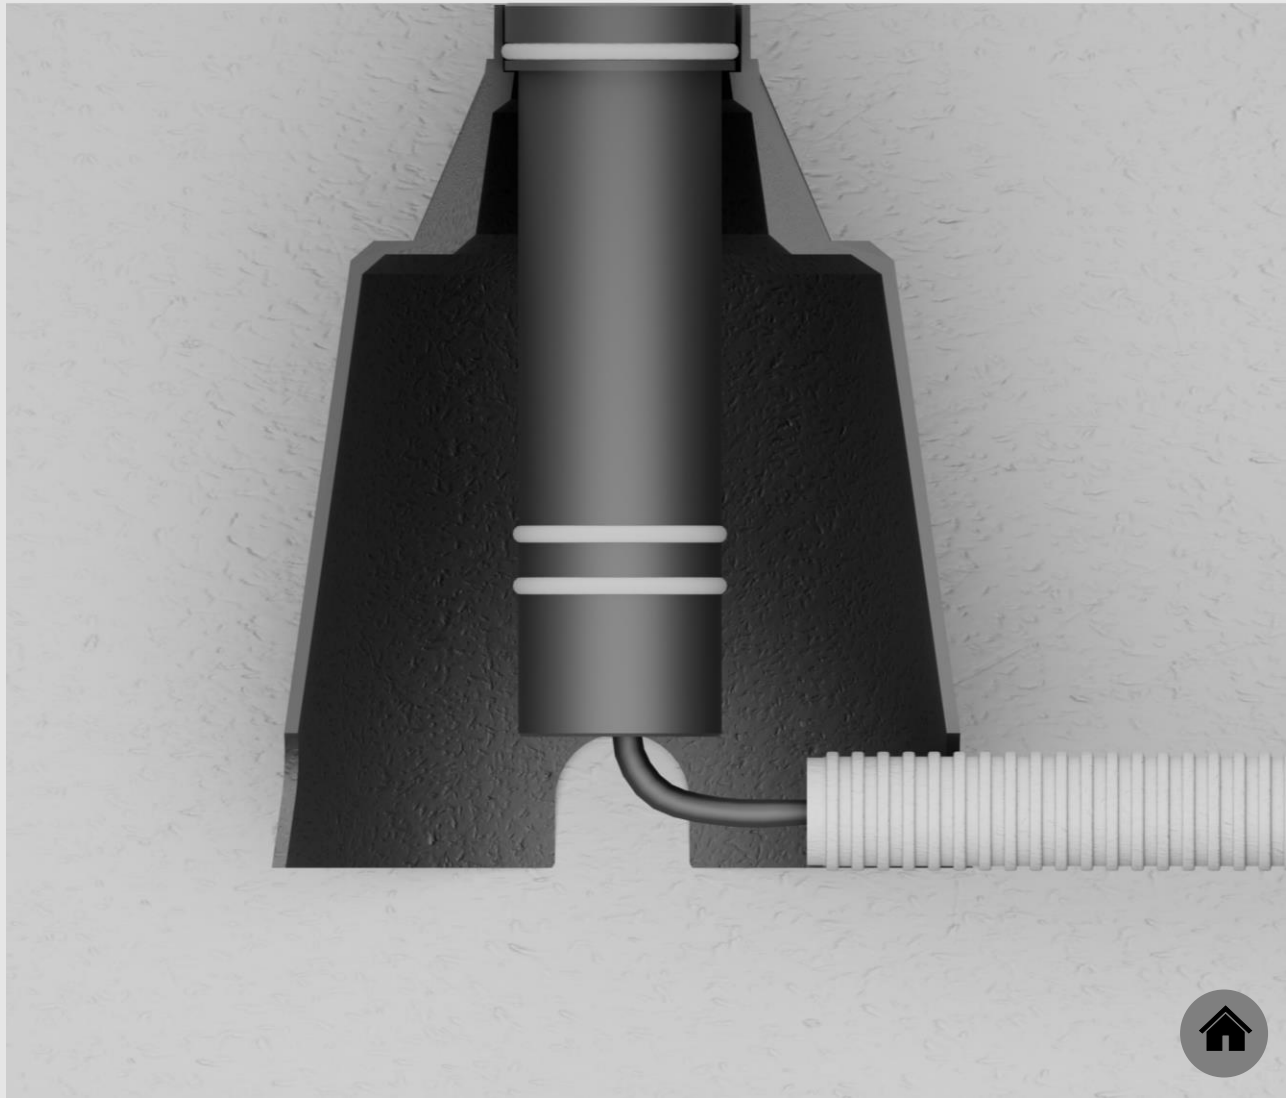

# BUIO SPOT + WALL BRACKET

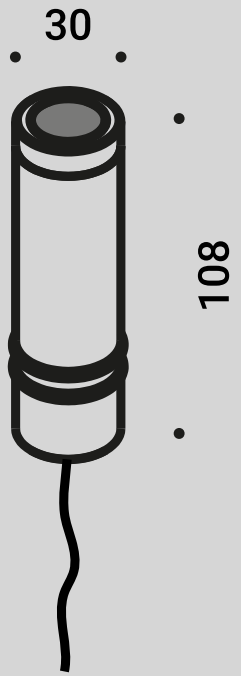

# BUIO SPOT + WALL BRACKET

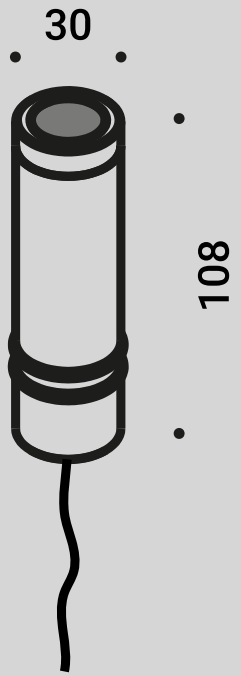


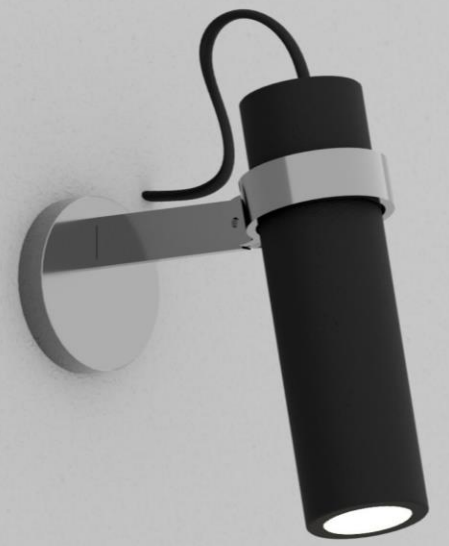

# BUIO SPOT + CEILING ROSE

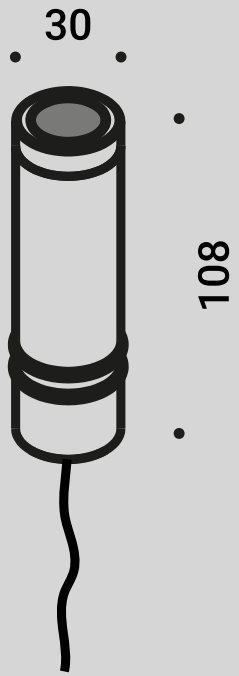

# BUIO SPOT + CEILING ROSE

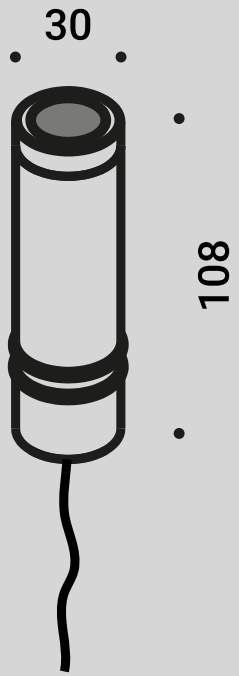

# BUIO SPOT + EARTH SPIKE

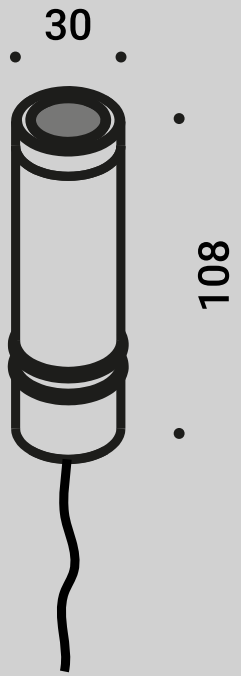


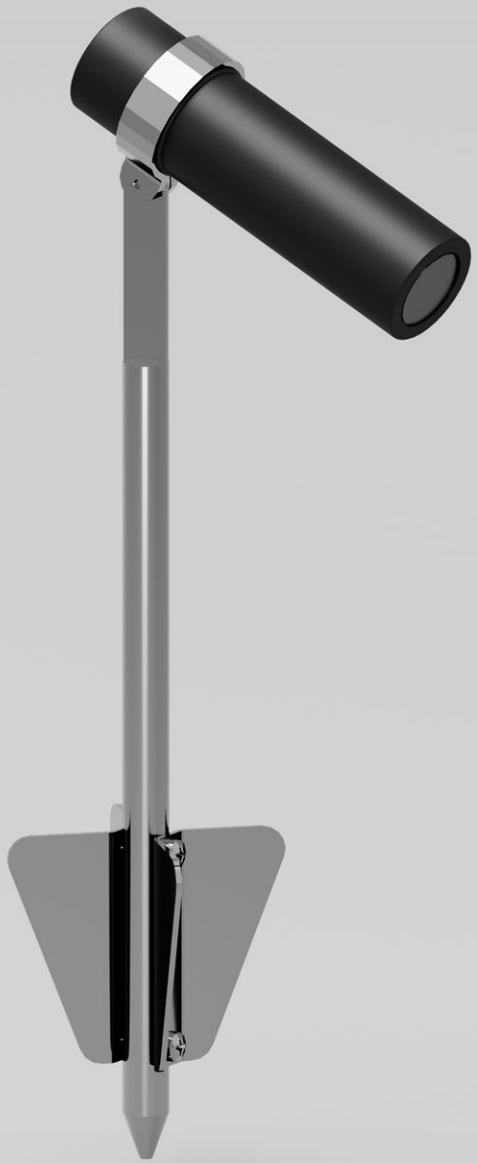

# BUIO SPOT + EARTH SPIKE

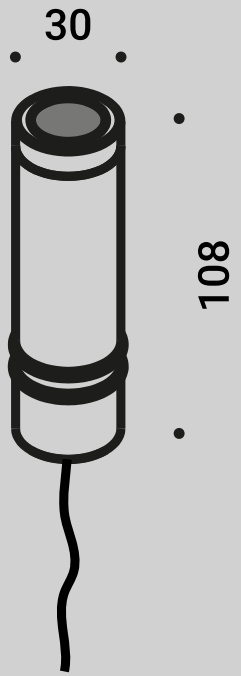

# BUIO SPOT + TREE STRAP

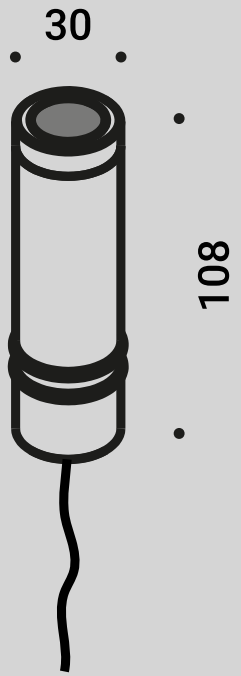

# BUIO SPOT + TREE STRAP

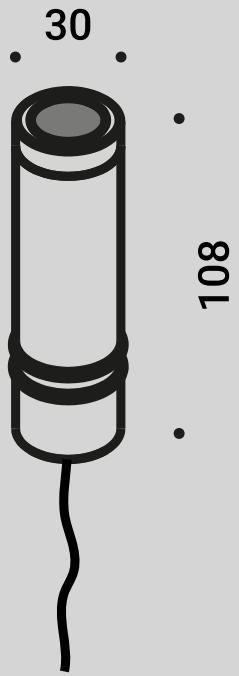

Recessed / Direct / Outdoor

**Material**

**Finish** **.04** Matt Black

**Note** Outdoor luminaire. Available with transparent or black glass. Black cable (1 m). *Apparecchio illuminante da esterno. Disponibile con vetro trasparente o nero. Cavo nero (1 m).*

**BUIO TRIMLESS - 13°**
Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5200400.27.20 |
| Matt Black - 3000K | 1A5200400.30.20 |




**BUIO TRIMLESS - 25°**
Black filter
6,2W
24V DC
2700K - 150lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5220400.27.20 |
| Matt Black - 3000K | 1A5220400.30.20 |








**BUIO TRIMLESS - 32°**
Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5210400.27.20 |
| Matt Black - 3000K | 1A5210400.30.20 |

**BUIO TRIMLESS ELLIPTICAL**
Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5230400.27.20 |
| Matt Black - 3000K | 1A5230400.30.20 |




**BUIO TRIMLESS - 13°**
Transparent filter
6,2W
24V DC
2700K - 239lm / 3000K - 246lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5240400.27.20 |
| Matt Black - 3000K | 1A5240400.30.20 |

**BUIO TRIMLESS - 25°**
Transparent filter
6,2W
24V DC
2700K - 300lm / 3000K - 309lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5260400.27.20 |
| Matt Black - 3000K | 1A5260400.30.20 |




**BUIO TRIMLESS - 32°**
Transparent filter
6,2W
24V DC
2700K - 279lm / 3000K - 288lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5250400.27.20 |
| Matt Black - 3000K | 1A5250400.30.20 |








**BUIO TRIMLESS ELLIPTICAL**
Transparent filter
6,2W
24V DC
2700K - 263lm / 3000K - 271lm
CRI >90
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5270400.27.20 |
| Matt Black - 3000K | 1A5270400.30.20 |

## Compulsory accessories / Accessori obbligatori

**Installation kits / Kit d'installazione**




| Installation box / Cassaforma | | Not included |
|---|---|---|
| Standard | | 1A5280000.00.00 |

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 110-240V | 24V/25W/IP67/ON/OFF | 1Z1120620 |

Recessed / Direct / Outdoor

**Material**

**Finish** **.04** Matt Black

**Note** Outdoor luminaire. Available with transparent or black glass. Black cable (1 m). *Apparecchio illuminante da esterno. Disponibile con vetro trasparente o nero. Cavo nero (1 m).*




**BUIO TRIM - 13°**
Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5120400.27.20 |
| Matt Black - 3000K | 1A5120400.30.20 |




**BUIO TRIM - 25°**
Black filter
6,2W
24V DC
2700K - 300lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5140400.27.20 |
| Matt Black - 3000K | 1A5140400.30.20 |








**BUIO TRIM - 32°**
Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5130400.27.20 |
| Matt Black - 3000K | 1A5130400.30.20 |




**BUIO TRIM ELLIPTICAL**
Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5150400.27.20 |
| Matt Black - 3000K | 1A5150400.30.20 |




**BUIO TRIM - 13°**
Transparent filter
6,2W
24V DC
2700K - 239lm / 3000K - 246lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5160400.27.20 |
| Matt Black - 3000K | 1A5160400.30.20 |




**BUIO TRIM - 25°**
Transparent filter
6,2W
24V DC
2700K - 300lm / 3000K - 309lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5180400.27.20 |
| Matt Black - 3000K | 1A5180400.30.20 |




**BUIO TRIM - 32°**
Transparent filter
6,2W
24V DC
2700K - 279lm / 3000K - 288lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5170400.27.20 |
| Matt Black - 3000K | 1A5170400.30.20 |








**BUIO TRIM ELLIPTICAL**
Transparent filter
6,2W
24V DC
2700K - 263lm / 3000K - 271lm
CRI >90
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5190400.27.20 |
| Matt Black - 3000K | 1A5190400.30.20 |

## Compulsory accessories / Accessori obbligatori

**Installation kits / Kit d'installazione**




| Installation box / Cassaforma | | Not included |
|---|---|---|
| Standard | | 1A5280000.00.00 |

**Drivers / Alimentatori**




| Driver / Alimentatore | | Not included |
|---|---|---|
| 110-240V | 24V/25W/IP67/ON/OFF | 1Z1120620 |

Floor-Wall-Ceiling / Direct / Outdoor

**Material**

**Finish** **.04** Matt Black

**Note** Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the spike and wall versions. Black cable (1 m).

*Apparecchio illuminante da esterno. Orientabile nella versione a picchetto e da parete. Disponibile con vetro trasparente o nero. Accessori per la versione a picchetto e da parete in inox AISI 316L. Cavo nero (1 m).*




**BUIO - 13°**
Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5040400.27.20 |
| Matt Black - 3000K | 1A5040400.30.20 |




**BUIO - 25°**
Black filter
6,2W
24V DC
2700K - 150lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5060400.27.20 |
| Matt Black - 3000K | 1A5060400.30.20 |








**BUIO - 32°**
Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5050400.27.20 |
| Matt Black - 3000K | 1A5050400.30.20 |




**BUIO ELLIPTICAL**
Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5070400.27.20 |
| Matt Black - 3000K | 1A5070400.30.20 |




**BUIO - 13°**
Transparent filter
6,2W
24V DC
2700K - 239lm / 3000K - 246lm
CRI >90
Beam 13°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5080400.27.20 |
| Matt Black - 3000K | 1A5080400.30.20 |




**BUIO - 25°**
Transparent filter
6,2W
24V DC
2700K - 300lm / 3000K - 309lm
CRI >90
Beam 25°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5100400.27.20 |
| Matt Black - 3000K | 1A5100400.30.20 |




**BUIO - 32°**
Transparent filter
6,2W
24V DC
2700K - 279lm / 3000K - 288lm
CRI >90
Beam 32°
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5090400.27.20 |
| Matt Black - 3000K | 1A5090400.30.20 |








**BUIO ELLIPTICAL**
Transparent filter
6,2W
24V DC
2700K - 263lm / 3000K - 271lm
CRI >90
UGR <19
Driver not included
CE IP67

| | |
|---|---|
| Matt Black - 2700K | 1A5110400.27.20 |
| Matt Black - 3000K | 1A5110400.30.20 |

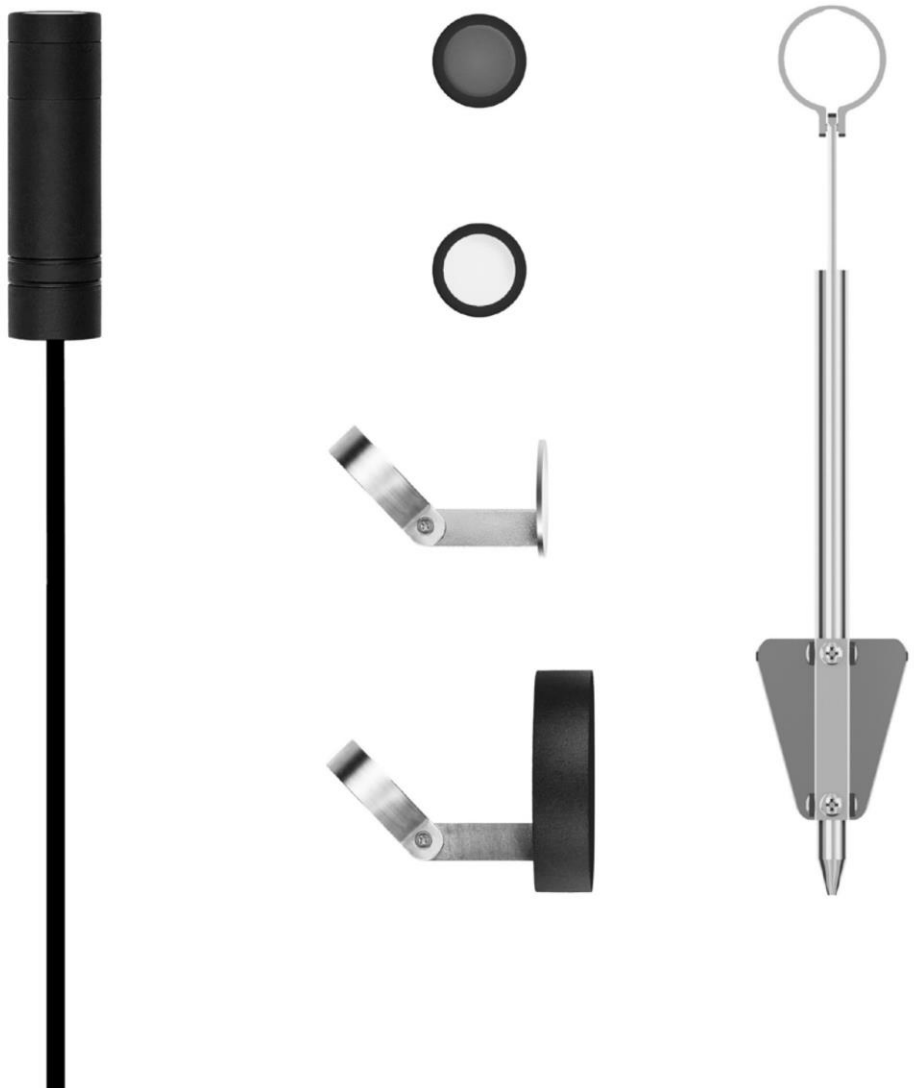



## Compulsory accessories / Accessori obbligatori

### Installation kits / Kit d'installazione

| Wall bracket / Staffa da parete | | Not included |
|---|---|---|
| Stainless Steel | Brushed INOX | 1A4431000.00.00 |




| Ceiling rose / Rosone | | Not included |
|---|---|---|
| Matt Black | Brushed INOX | 1A4441000.00.00 |

| Earth spike / Picchetto | | Not included |
|---|---|---|
| Stainless Steel | Brushed INOX | 1A4451000.00.00 |

| Tree strap / Cinghia per albero | | Not included |
|---|---|---|
| Standard | Length 1 m | 1A4590000.00.00 |

### Drivers / Alimentatori




| Driver / Alimentatore | | Not included |
|---|---|---|
| 110-240V | 24V/25W/IP67/ON/OFF | 1Z1120620 |

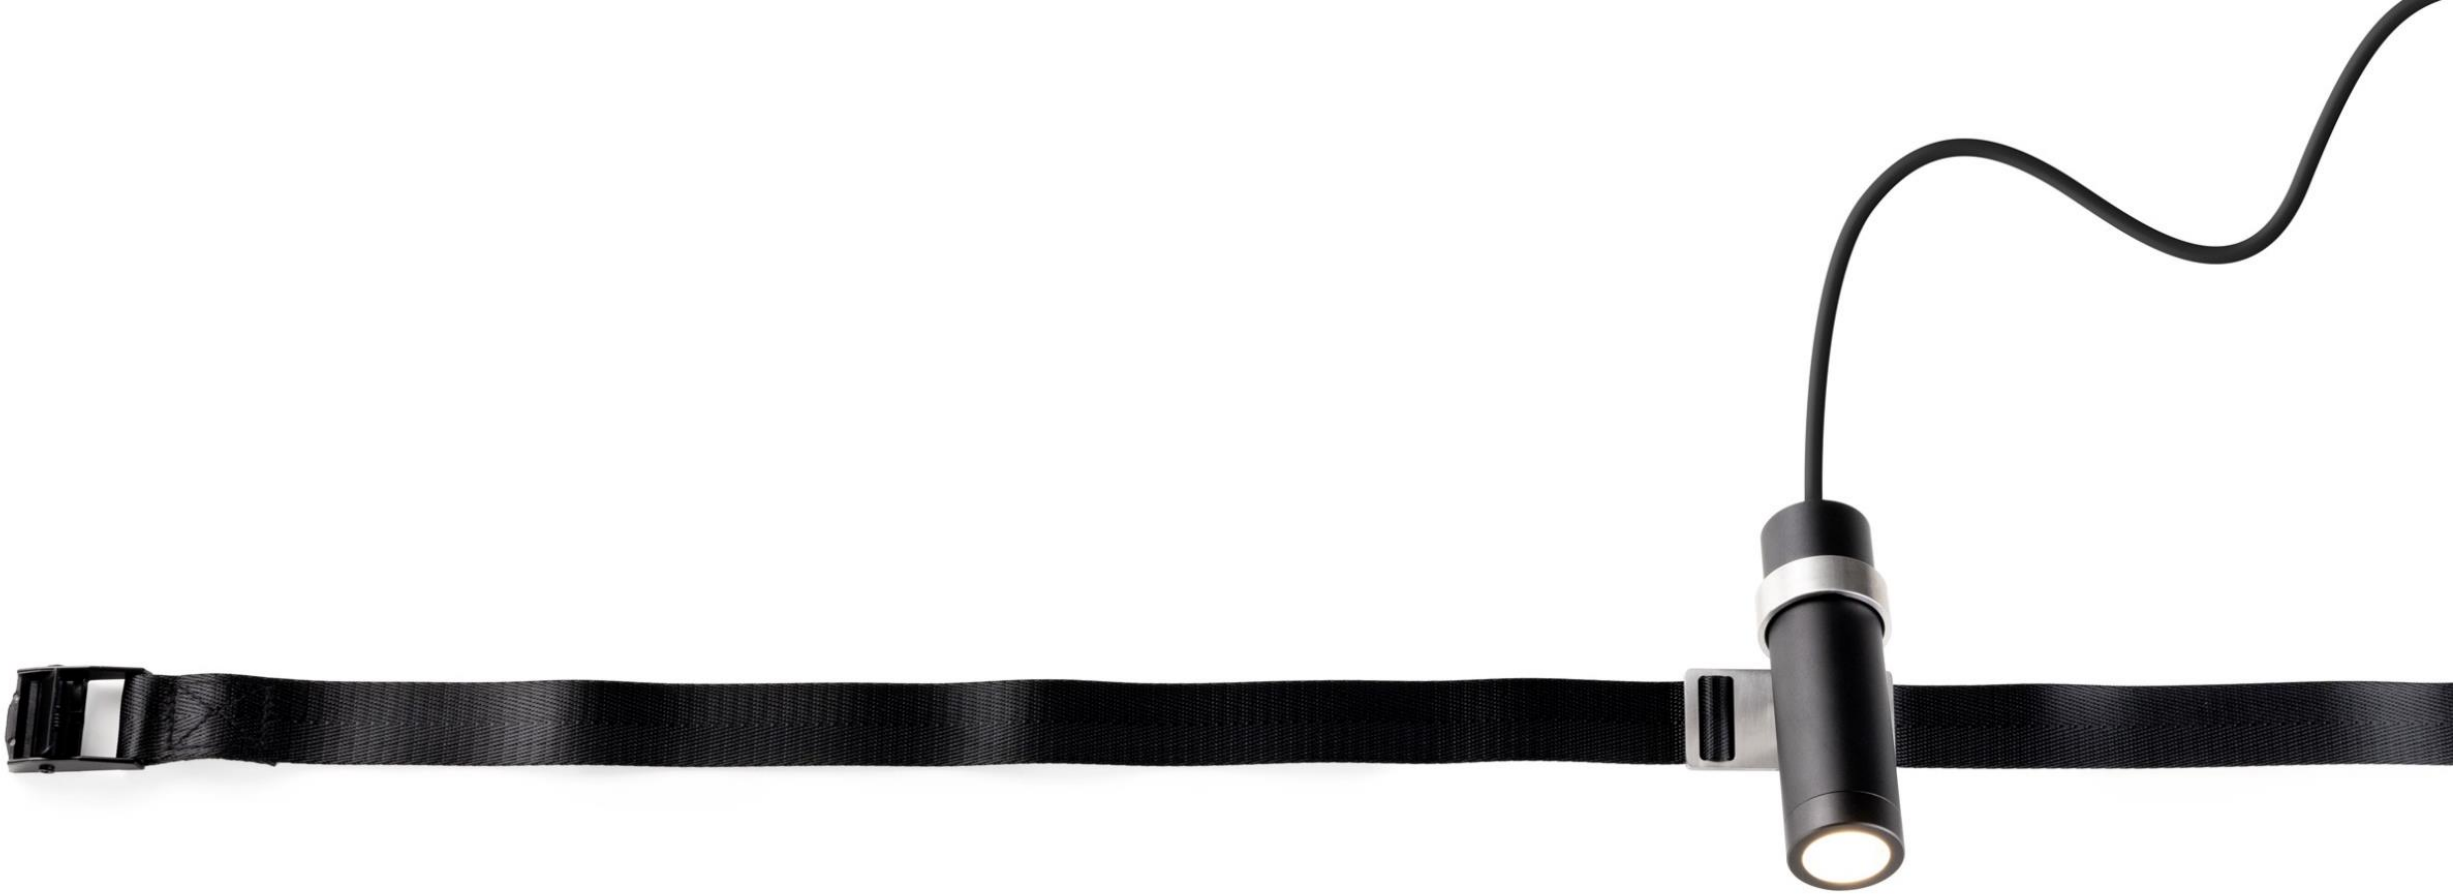

# ANIMA

Design  Davide Groppi – Giorgio Rava – 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram.
It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.
At the top, an open circle, almost a hook for fishermen of the soul.

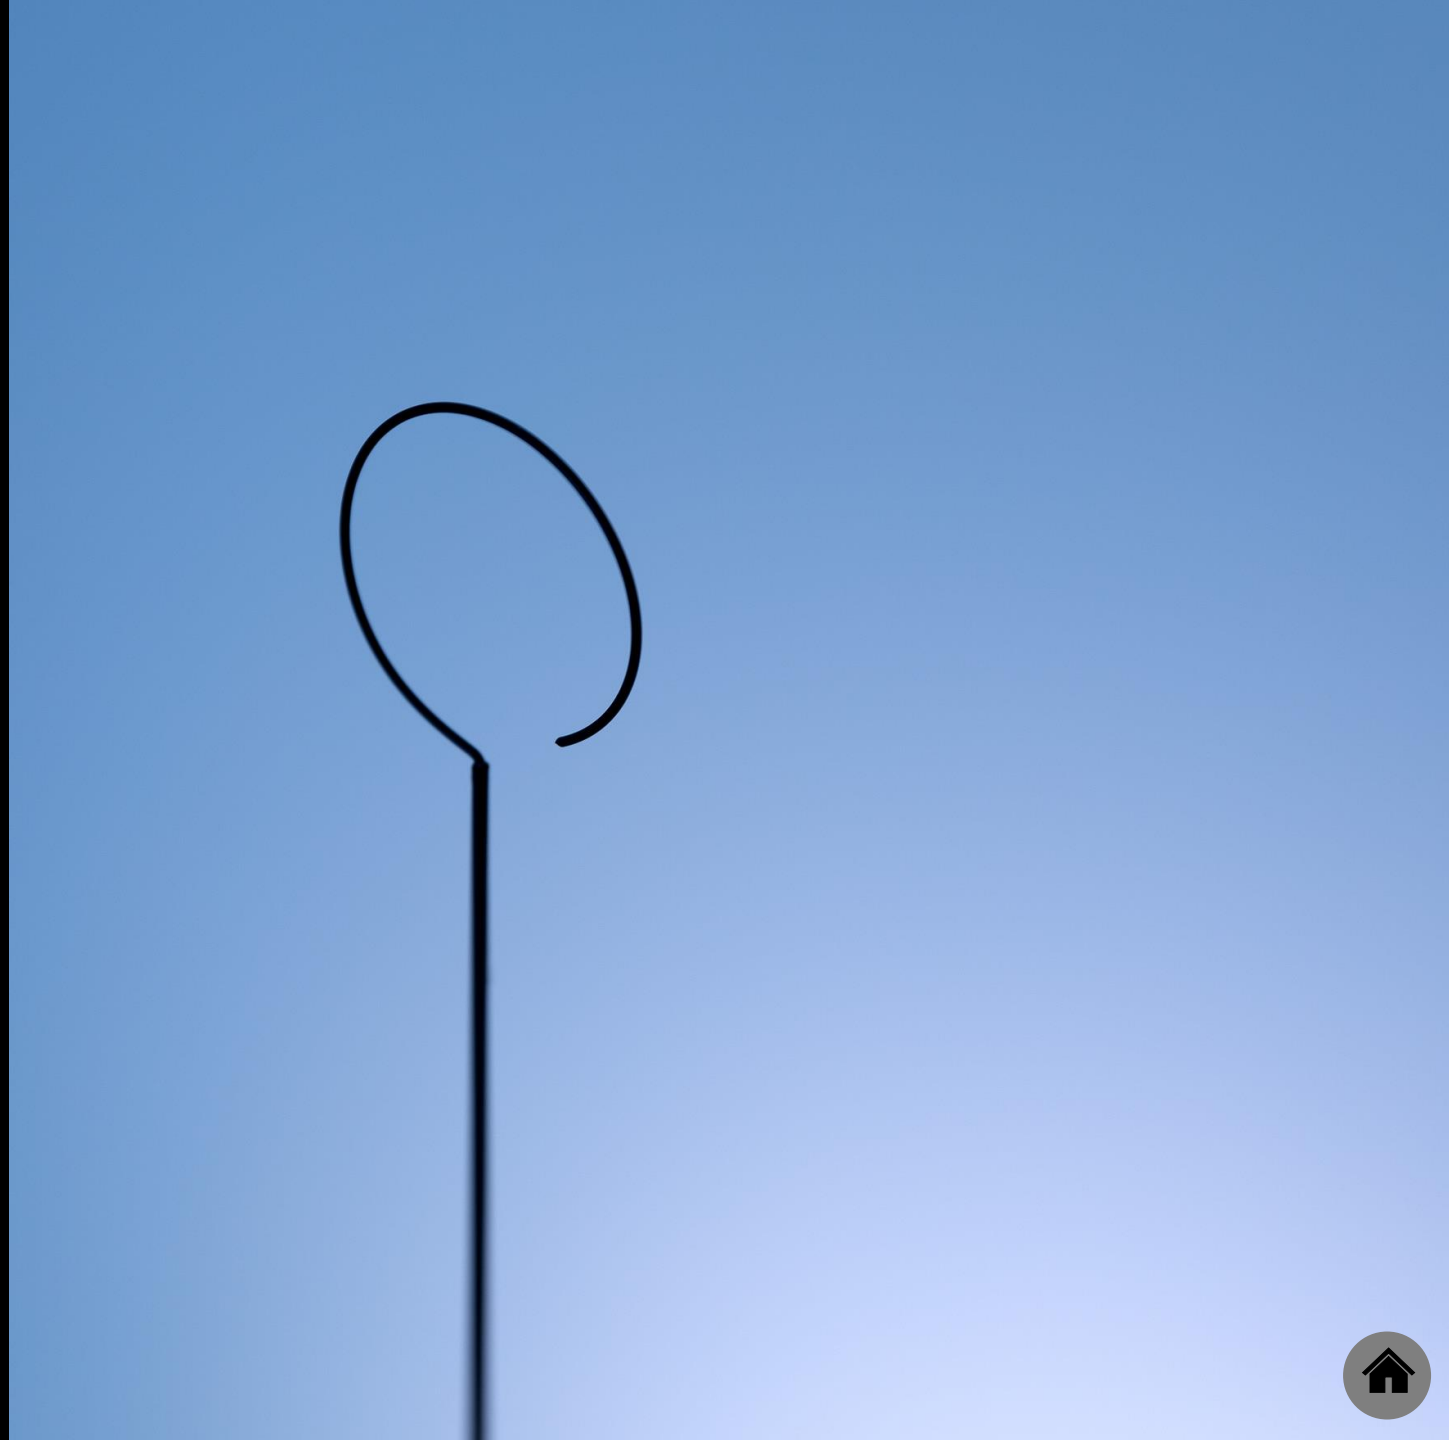

## ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

**Material** ABS - Carbon fiber - Metal

**Finish** **.04** Matt Black

**Note** Table luminaire. Touch ON/OFF and adjustment. Black cable.

*Apparecchio illuminante da tavolo. ON/OFF e regolazione touch. Cavo nero.*




**ANIMA**
4W
5V DC
2700K - 575lm / 3000K - 589lm
CRI >80
Dimmer on board
Driver with plug not included
USB cable included
CE IP20

| | |
|---|---|
| Matt Black - 2700K - Dimmer on board | 1A1090400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A1090400.30.06 |

### Optional accessories / Accessori opzionali

**Drivers / Alimentatori**

| Driver with plug / Alimentatore con spina | | Not included |
|---|---|---|
| Matt Black | Input 110-240V - 50/60Hz<br>Output 5V DC - 2A - 10W - IP20 | 1Z0000088 |

**Other accessories / Altri accessori**

| USB to USB-C cable / Cavo da USB a USB-C | | Included |
|---|---|---|
| Matt Black | Length 1 m | 1Z0000132 |

| Power bank | | Not included |
|---|---|---|
| | 10000mAh/36Wh<br>Output 5V DC<br>Battery life 10 hours | 1A1990000.00.00 |

PLAY

# FM

Design  Davide Groppi – 2022

An antenna of light.
Antennas are mysterious, absolute and intrinsically beautiful, because their essentialness expresses nothing more than their function.
A performing, adjustable and extremely comfortable light.

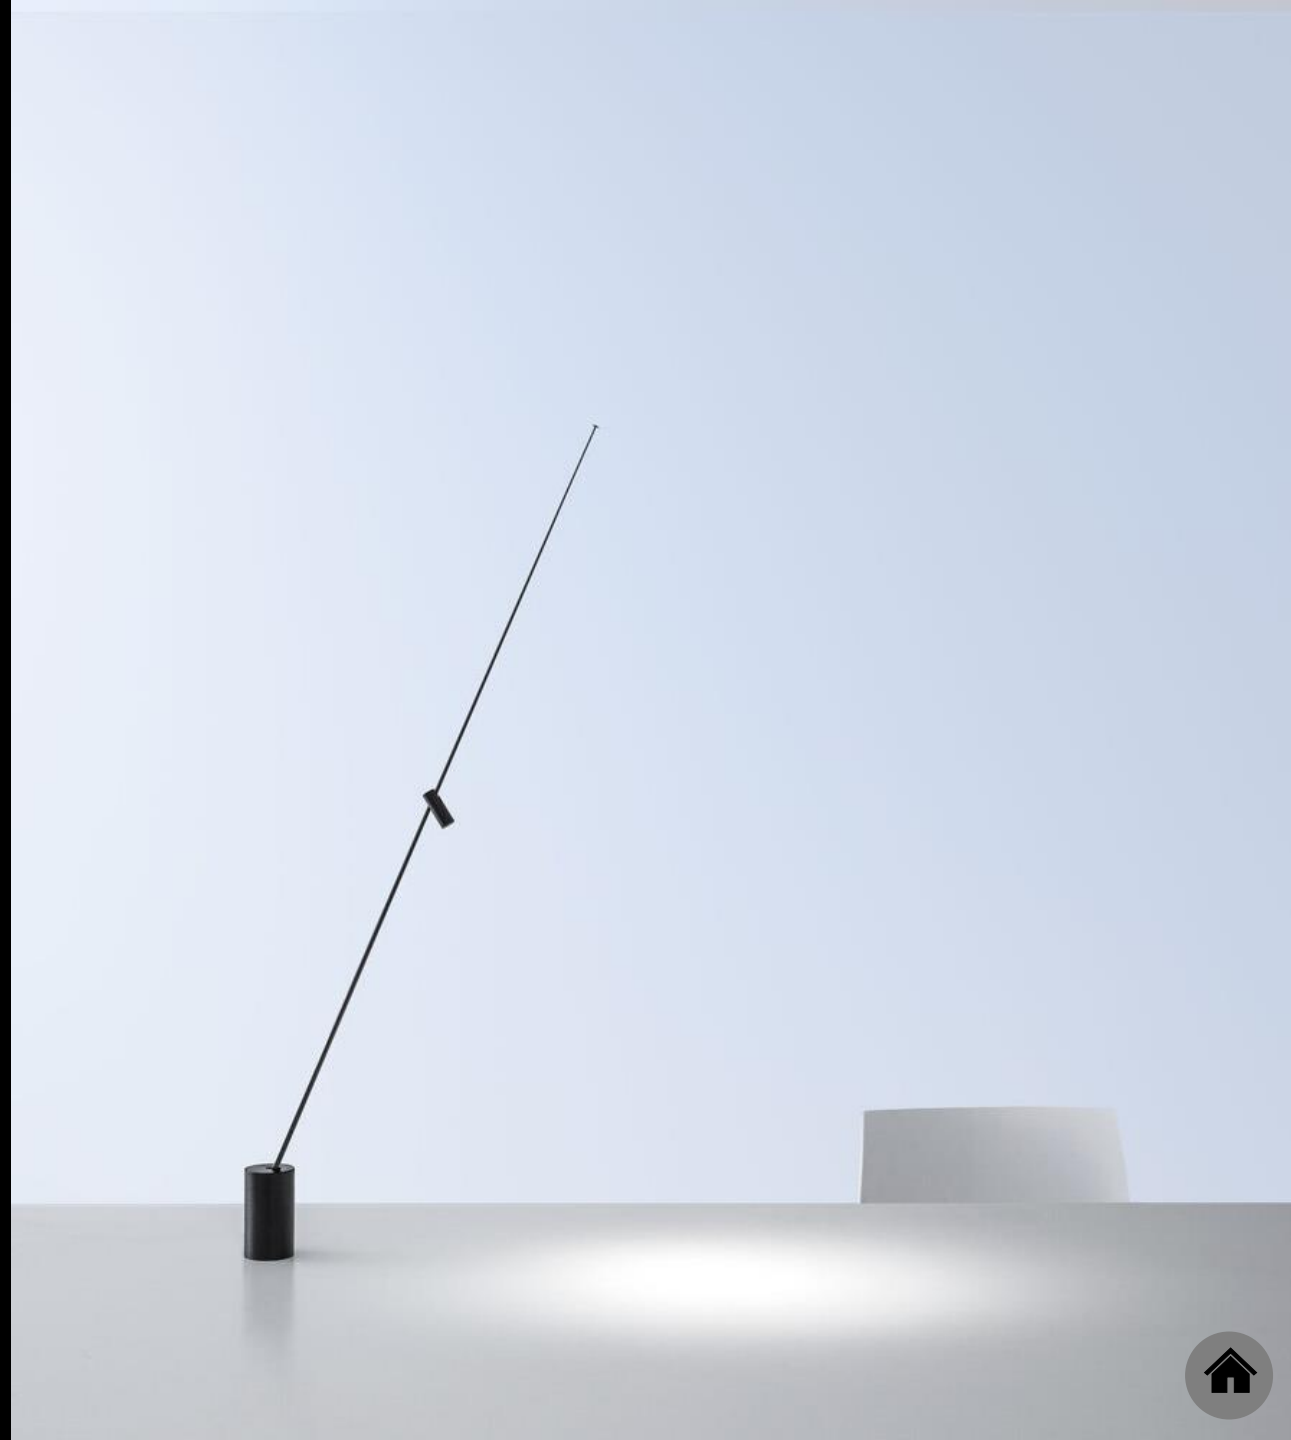

# FM

Davide Groppi / 2022

Table / Direct / Indoor

**Material** Carbon fiber - Metal

**Finish** **.04** Matt Black

**Note** Table luminaire. Adjustable along the vertical axis. ON/OFF and push control. Black cable.

*Apparecchio illuminante da tavolo. Orientabile lungo l'asse verticale. ON/OFF e regolazione push. Cavo nero.*

**FM**
1,5W
5V DC
2700K - 154lm / 3000K - 179lm
CRI >90
UGR <19
Dimmer on board
Driver with plug not included
USB cable included
CE IP20

| | |
|---|---|
| Matt Black - 2700K - Dimmer on board | 1A2440400.27.06 |
| Matt Black - 3000K - Dimmer on board | 1A2440400.30.06 |

## Optional accessories / Accessori opzionali

### Drivers / Alimentatori

**Driver with plug / Alimentatore con spina** — Not included

| | | |
|---|---|---|
| Matt Black | Input 110-240V - 50/60Hz<br>Output 5V DC - 2A - 10W - IP20 | 1Z0000088 |

### Other accessories / Altri accessori

**USB to USB-C cable / Cavo da USB a USB-C** — Included

| | | |
|---|---|---|
| Matt Black | Length 1 m | 1Z0000132 |

**Power bank** — Not included

| | | |
|---|---|---|
| | 10000mAh/36Wh<br>Output 5V DC<br>Battery life 10 hours | 1A1990000.00.00 |

BAD GIRL BAKERY
CAKE BOOK
DESSERTS BY THE YARD
BAKING with DORIE
donna hay
MODERN BAKING
Claire Saffitz
What's for Dessert
BAKING
WEEKNIGHT BAKING
GOLDEN
BAKED EXPLORATIONS
BETTER BAKING
BAKED ELEMENTS
Desserts
BAKED EXPLORATIONS
Ready for Dessert
Baking in America
sweet kitchen
PERFECT CAKES
BAKED
250 BEST Cakes & Pies
PERFECT FINISH
CROWNE
Ready for Dessert
KING ARTHUR FLOUR
Baker's Companion
BOLPO

# SUSPENSION KIT

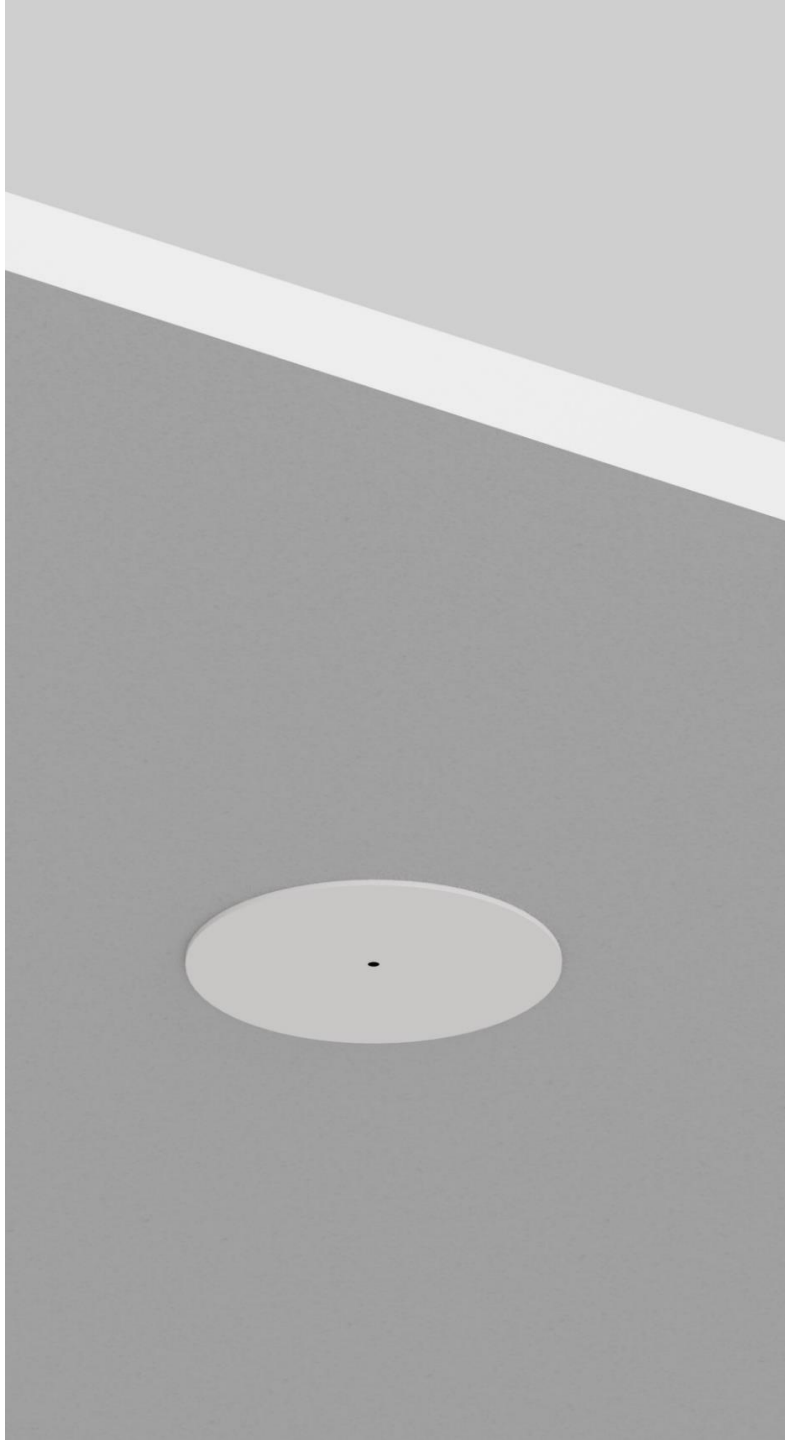

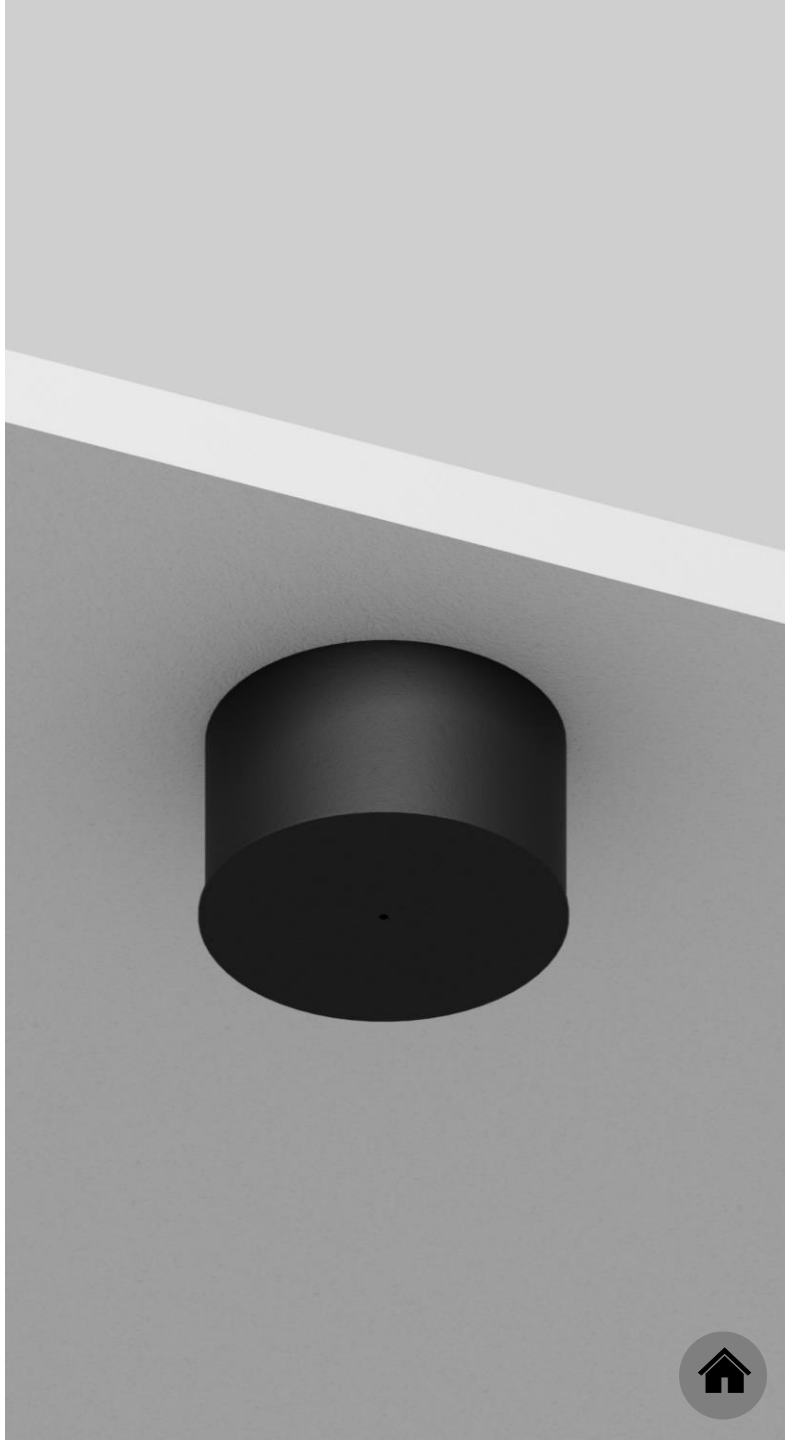

# RECESSED SUSPENSION KIT

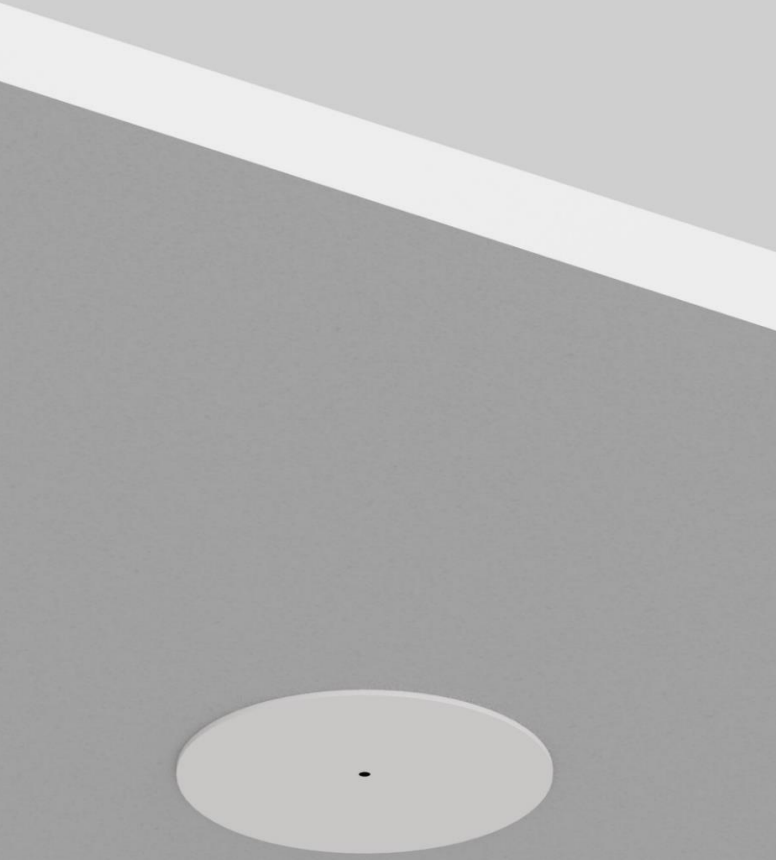

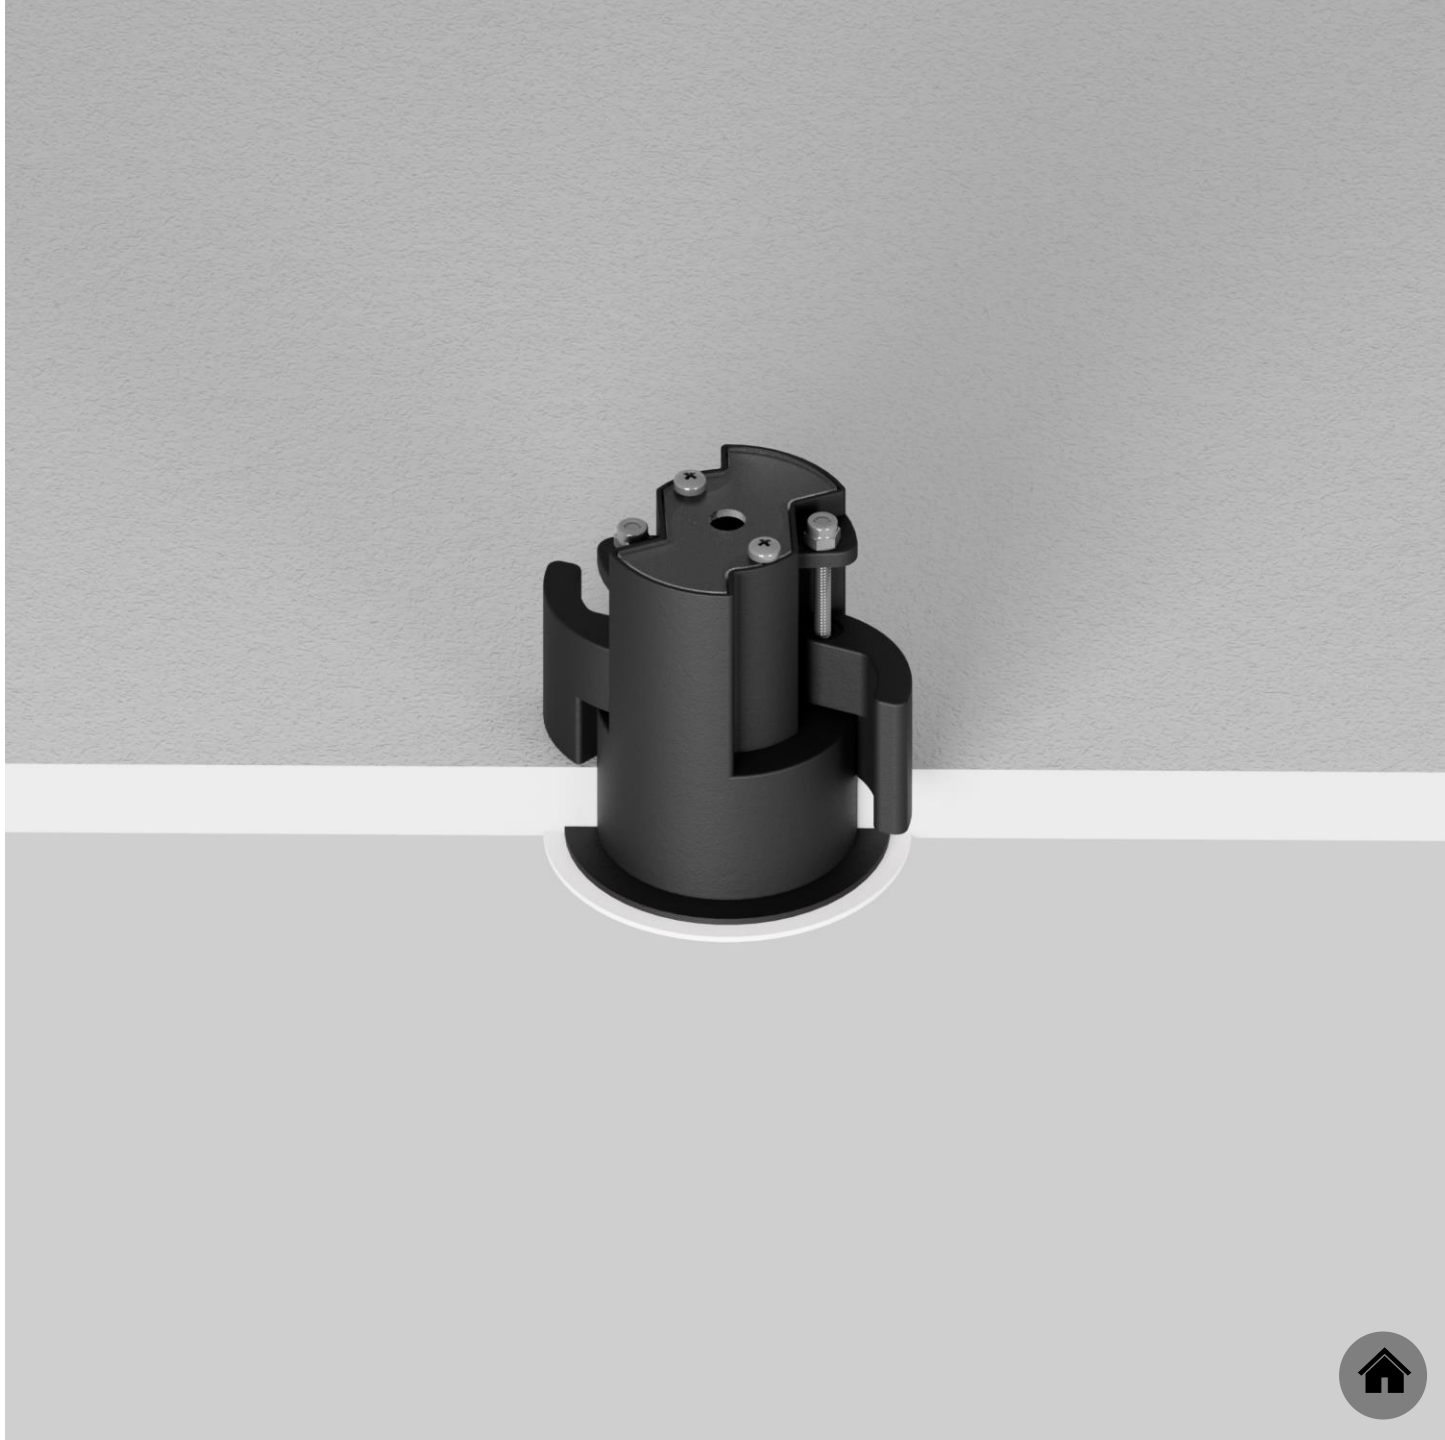

# CEILING SUSPENSION KIT

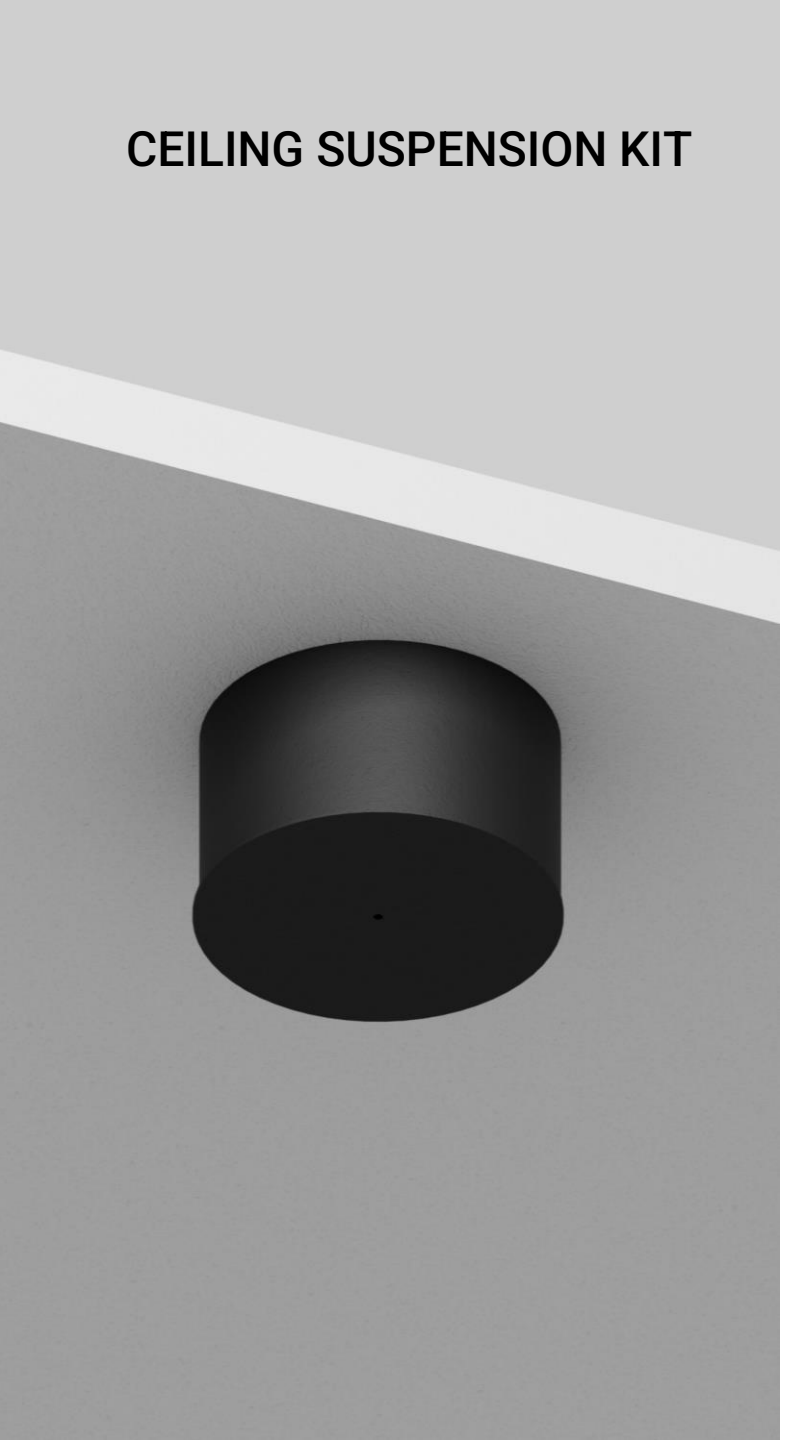

**Recessed suspension kit** / Kit di sospensione da incasso

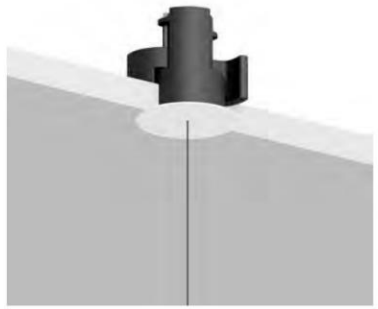



Suspension kit for 12,5 mm plasterboard
Plasterboard cut-out Ø 44 mm
Minimum space for mounting 70 mm

Kit di sospensione per cartongesso 12,5 mm
Dimensioni taglio cartongesso Ø 44 mm
Spazio minimo per incasso 70 mm

Magnetic fixing
Fissaggio magnetico

| Version | Use | Product reference | Finish | Code |
|---|---|---|---|---|
| Recessed suspension kit.01 | For suspension cables | REFLEX S 1<br>REFLEX S 2<br>SHANGHAI 1<br>SHANGHAI 2<br>SOTTILE 1<br>SOTTILE 1 DE<br>SOTTILE 2<br>SOTTILE 2 DE | Matt White | 1X0000300.01.00 |
| | | | Matt Black | 1X0000400.01.00 |
| Recessed suspension kit.02 | For elettrical cables | MAGIA | Matt White | 1X0000300.02.00 |
| | | | Matt Black | 1X0000400.02.00 |
| Recessed suspension kit.03 | For suspension cables | MASAI 1<br>MASAI 2<br>SPY<br>SPY DE | Matt White | 1X0000300.03.00 |
| | | | Matt Black | 1X0000400.03.00 |
| Recessed suspension kit.04 | For elettrical cables | ASINTOTO<br>REFLEX S 2<br>SHANGHAI 2<br>SOTTILE 2<br>SOTTILE 2 DE | Matt White | 1X0000300.04.00 |
| | | | Matt Black | 1X0000400.04.00 |
| Recessed suspension kit.05 | For elettrical cables | LOUIS XIV 2<br>SOTTOSOPRA 2 | Matt White | 1X0000300.05.00 |
| | | | Matt Black | 1X0000400.05.00 |





**Ceiling suspension kit** / Kit di sospensione da soffitto

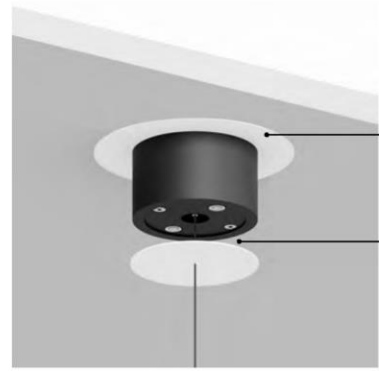

Back plate for masonry ceilings
Back plate per soffitti in muratura

Magnetic fixing
Fissaggio magnetico




| Version | Use | Product reference | Finish | Code |
|---|---|---|---|---|
| Ceiling suspension kit.01 | For suspension cables | REFLEX S 1<br>REFLEX S 2<br>SHANGHAI 1<br>SHANGHAI 2<br>SOTTILE 1<br>SOTTILE 1 DE<br>SOTTILE 2<br>SOTTILE 2 DE | Matt White | 1X0010300.01.00 |
| | | | Matt Black | 1X0010400.01.00 |
| Ceiling suspension kit.02 | For elettrical cables | MAGIA | Matt White | 1X0010300.02.00 |
| | | | Matt Black | 1X0010400.02.00 |
| Ceiling suspension kit.03 | For suspension cables | MASAI 1<br>MASAI 2<br>SPY<br>SPY DE | Matt White | 1X0010300.03.00 |
| | | | Matt Black | 1X0010400.03.00 |
| Ceiling suspension kit.04 | For elettrical cables | ASINTOTO<br>REFLEX S 2<br>SHANGHAI 2<br>SOTTILE 2<br>SOTTILE 2 DE | Matt White | 1X0010300.04.00 |
| | | | Matt Black | 1X0010400.04.00 |
| Back plate | For masonry ceilings | | Matt White | 1X0050300.01.00 |
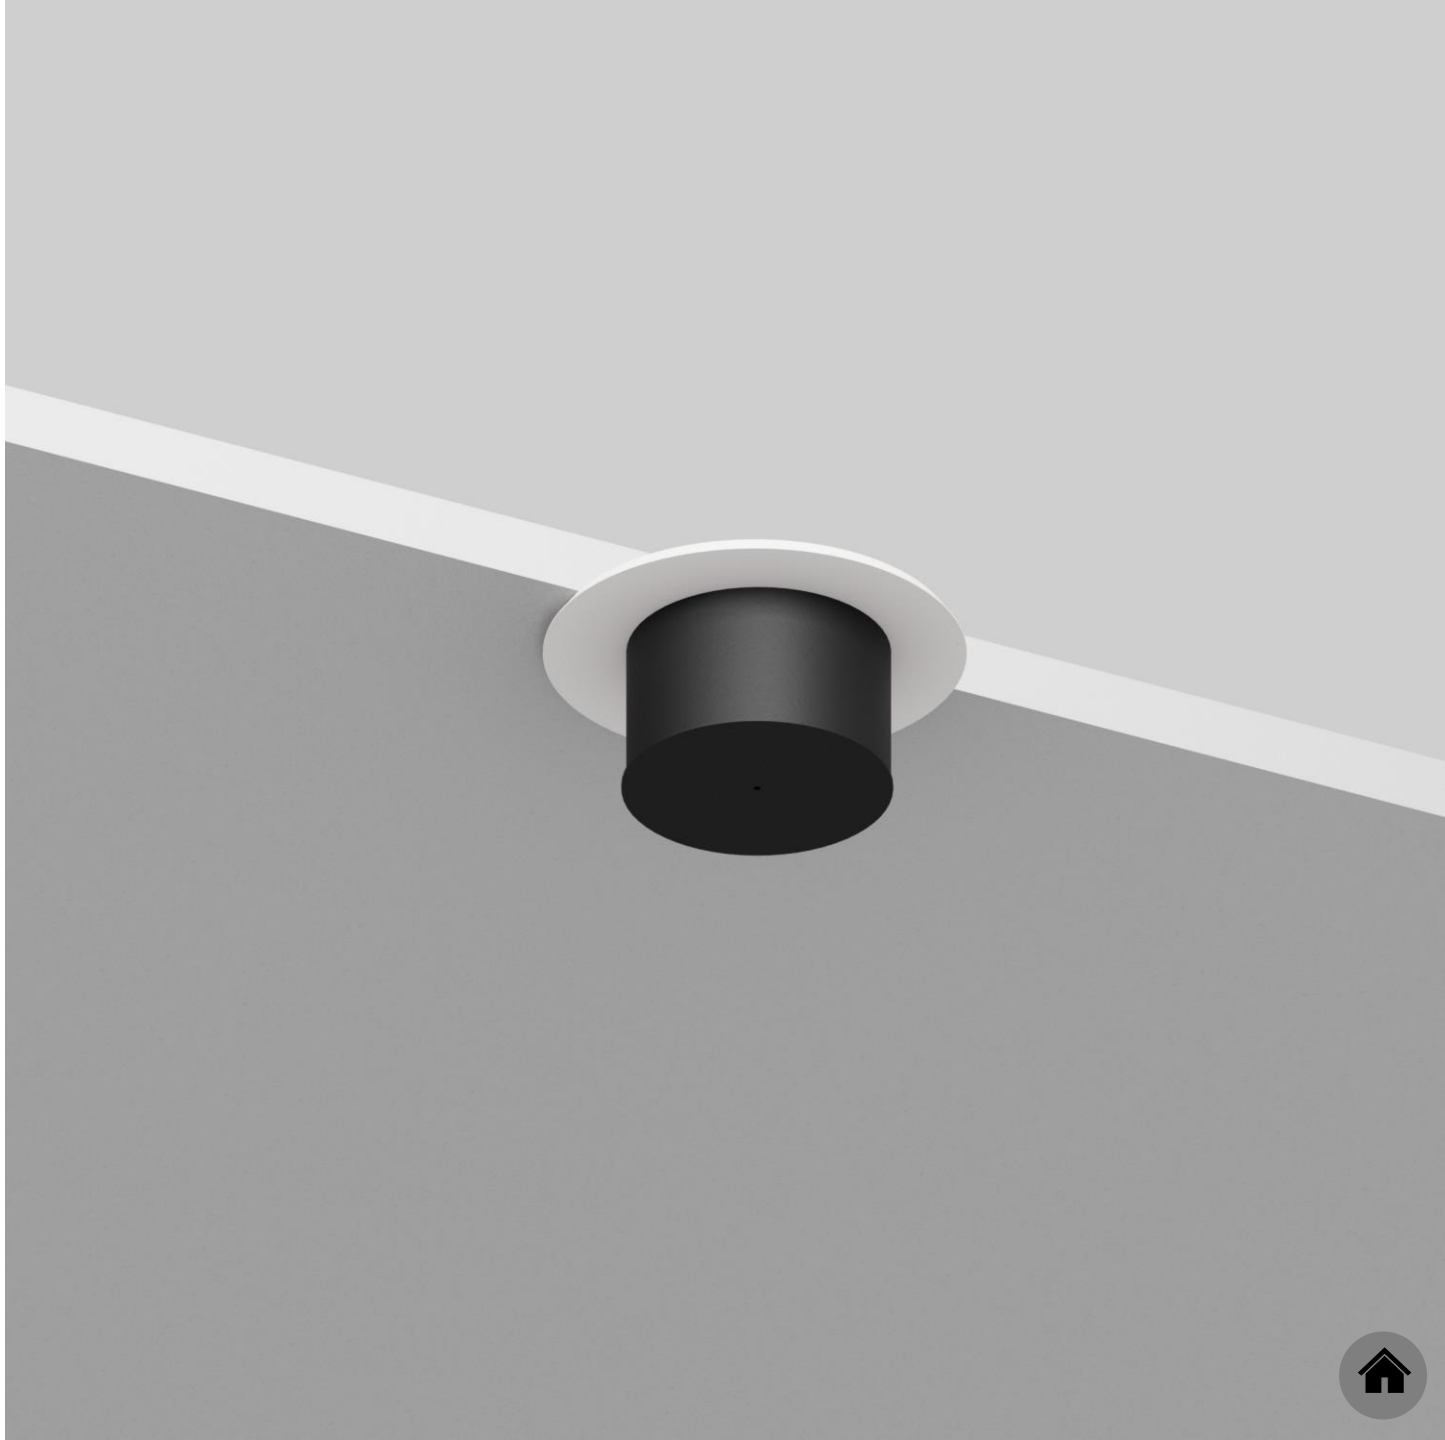
# BACK PLATE